

B_S-1W & B_D-1W Series

FIXED INPUT ISOLATED & UNREGULATED
1W SINGLE OUTPUT
MINIATURE SIP/DIP PACKAGE

RoHS CE cRU[®]US
 multi-country patent protection

FEATURES

- Efficiency up to 80%
- Small Footprint
- Miniature SIP/DIP Package
- 1KVDC Isolation
- Temperature Range: -40°C to +85°C
- Internal SMD Construction
- Industry Standard Pinout
- No Heatsink Required
- No External Component Required
- PCB Mounting
- RoHS Compliance

APPLICATIONS

The B_S-1W & B_D-1W Series are specially designed for applications where a single power supply is isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple and noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits and IGBT power device driven circuits, etc.

MODEL SELECTION

B0505S-1W

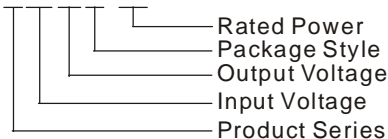

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% , Typ)	UL CE
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
B0303S/D-1W	3.3	2.97-3.63	3.3	303	30	72	
B0305S/D-1W			5	200	20	74	
B0503S/D-1W	5	4.5-5.5	3.3	303	30	72	
B0505S/D-1W			5	200	20	70	UL CE
B0509S/D-1W			9	111	12	78	UL CE
B0512S/D-1W			12	83	9	79	UL CE
B0515S/D-1W			15	67	7	80	UL CE
B1203S/D-1W			12	10.8-13.2	3.3	303	30
B1205S/D-1W	5	200			20	71	UL CE
B1209S/D-1W	9	111			12	76	UL CE
B1212S/D-1W	12	83			9	78	UL CE
B1215S/D-1W	15	67			7	80	UL CE
B2405S/D-1W	24	21.6-26.4			5	200	20
B2409S/D-1W			9	111	12	78	UL CE
B2412S/D-1W			12	83	9	79	UL CE
B2415S/D-1W			15	67	7	80	UL CE

Note: The B_S-W2 & B_D-W2 series also are available in our company.

ISOLATION SPECIFICATIONS

Item	Test Conditions	Min	Typ.	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Line regulation	For Vin change of 1%(3.3V output)			1.5	%
	For Vin change of 1%(others)			1.2	
Load regulation	10% to 100% load (3.3V output)		15	20	
	10% to 100% load (5V output)		12.8	15	
	10% to 100% load (9V output)		8.3	10	
	10% to 100% load (12V output)		6.8	10	
	10% to 100% load (15V output)		6.3	10	
Output voltage accuracy		See tolerance envelope graph			
Temperature drift	100% full load			0.03	%/°C
Ripple & Noise *	20MHz Bandwidth		75	100	mVp-p
Switching frequency	Full load, nominal input		100		KHz

* Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:

1.All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

2. See the recommended circuits for more details.

MORNSUN Science& Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China

Tel: 86-20-38601850

Fax:86-20-38601272


Http://www.mornsun-power.com

COMMON SPECIFICATION


Item	Test Conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			300	
Short circuit protection *				1	S
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
MTBF		3500			K Hours
Weight			1.6		g

* Supply voltage must be discontinued at the end of short circuit duration.

TYPICAL CHARACTERISTICS

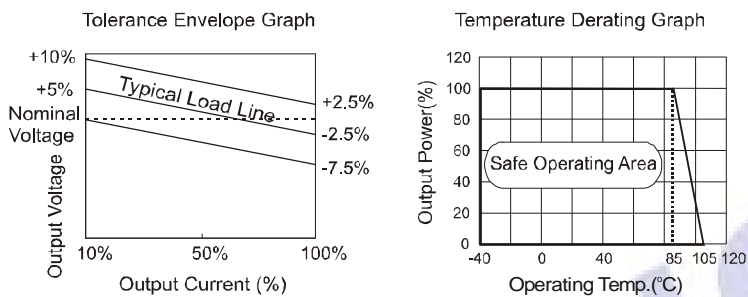


OUTLINE DIMENSIONS & FOOTPRINT DETAILS

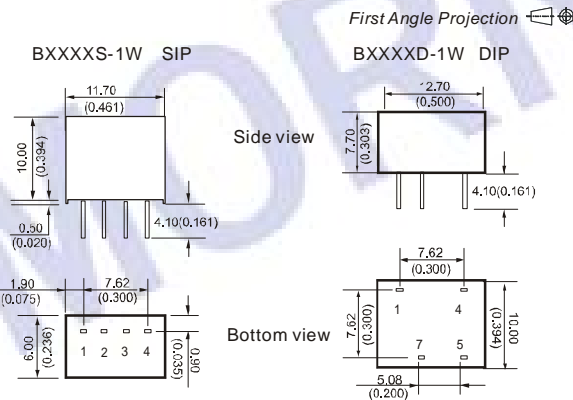

RECOMMENDED FOOTPRINT
Top view, grid: 2.54mm (0.1inch),
diameter: 1.00mm

B_S-1W Series




FOOTPRINT DETAILS

Pin	Function
1	GND
2	Vin
3	0V
4	+Vo

Note:
Unit: mm (inch)
Pin section: 0.50*0.30mm (0.020*0.012inch)
Pin tolerances: ±0.10mm (±0.004inch)
General tolerances: ±0.25mm (±0.010inch)

B_D-1W Series



Pin	Function
1	GND
4	Vin
5	+Vo
7	0V

APPLICATION NOTE

Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (B_S-W2 & B_D-W2 Series).

Recommended circuit


In some circuits which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees the external capacitor table.

EXTERNAL CAPACITOR TABLE

Vin (VDC)	Cin (uF)	Vout (VDC)	Cout (uF)
3.3/5	4.7	3.3/5	10
12	2.2	9	4.7
24	1	12	2.2
-	-	15	1

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.


To get an extremely low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, which may produce a more significant filtering effect. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (Figure 1).

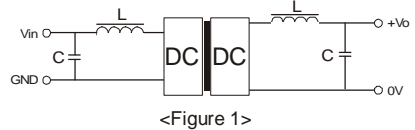

<Figure 1>

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

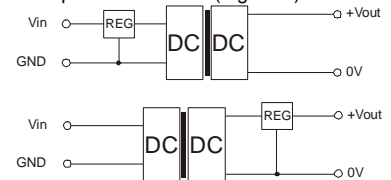

<Figure 2>

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

No parallel connection or plug and play.