


## Драйвер E27-350mA 12W

---

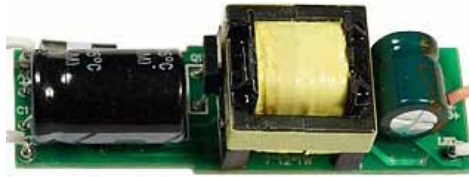

### Introduction

1. The circuit design is simple and functional with stable performance.
2. Isolated circuit design, safe and reliable.
2. LED open circuit, soft start, and multi-circuit protection.
3. Wide input voltage from 85 to 265VAC, adapt to the global standard of most countries.
4. High-precision constant current output, constant current output accuracy up to 2%.
5. Highly efficient circuit design, up to 85% efficiency, can effectively reduce the operating temperature.
6. Overcome the deficiencies of similar products in the EMC and EMI tests, leading the technology trend.

### Applications

Driver is an isolated high-precision constant current power supply, suitable for small size, high power LED lighting products, e.g. light bulb, PAR lamp and so on.

### Parameters

- Input voltage AC/DC 85V~265V
- Output voltage 24V~48V
- Output current 325mA
- Output power (7~12)\*1W
- Operating temperature 0~+65°C
- Storage temperature -20~+85°C
- Product dimension 65x20x20mm

### Connection

1. In the above diagram, the 2 white wires on the left of the module are input terminals, regardless of positive and negative.
2. The white wire (negative terminal) and the red wire (positive terminal) on the right of the module are output terminals.
3. Installation method: fixed to the shell of the lamp.

### Remark

This specification is only a reference for selection and application. It does not guarantee consistent with the above diagrams. Please confirm with the actual samples received. The company reserve the right to make any amendments on the product specifications.