



## PWA\_MD-6W & PWB\_MD-6W Series

**6W, 4:1 WIDE INPUT, ISOLATED & REGULATED  
SINGLE/DUAL OUTPUT DC/DC CONVERTER  
DIP PACKAGE**

multi-country patent protection **RoHS**

### FEATURES

- High Efficiency up to 86%
- Operating Temperature: -40°C to +85°C
- 1500VDC Isolation
- Metal Shielding Package
- No Heat Sink Required
- Internal SMD construction
- Industry Standard Pinout
- MTBF>1,000,000 hours
- Continuous Short-Circuit Protection
- RoHS Compliance

### APPLICATIONS

PWA\_MD-6W & PWB\_MD-6W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage range $\leq$  4:1);
- 2) Where isolation is necessary between input and output (Isolation Voltage $\leq$ 1500VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

### PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (% Typ)
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal	Range	Max**		Max	Min	
PWA2405MD-6W *	24	9-36	40	$\pm 5$	$\pm 600$	$\pm 60$	80
PWA2412MD-6W *				$\pm 12$	$\pm 250$	$\pm 25$	83
PWA2415MD-6W *				$\pm 15$	$\pm 200$	$\pm 20$	85
PWA2424MD-6W *				$\pm 24$	$\pm 125$	$\pm 13$	86
PWB2403MD-6W *				3.3	1500	150	78
PWB2405MD-6W				5	1200	120	80
PWB2412MD-6W				12	500	50	83
PWB2415MD-6W *				15	400	40	85
PWB2424MD-6W *				24	250	25	86
PWA4805MD-6W *				48	18-72	80	$\pm 5$
PWA4812MD-6W *	$\pm 12$	$\pm 250$	$\pm 25$				83
PWA4815MD-6W *	$\pm 15$	$\pm 200$	$\pm 20$				85
PWA4824MD-6W *	$\pm 24$	$\pm 125$	$\pm 13$				86
PWB4803MD-6W *	5	1500	150				78
PWB4805MD-6W *	5	1200	120				80
PWB4812MD-6W *	12	500	50				84
PWB4815MD-6W *	15	400	40				85
PWB4824MD-6W *	24	250	25				86

\* Designing.


\*\*Input voltage can't exceed this value, or will cause the permanent damage.

Note: The load shouldn't be less than 10%, otherwise ripple will increase dramatically.

Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

### MODEL SELECTION

PWA2405MD-6W



### MORNSUN Science & Technology co., Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China  
Tel: 86-20-38601850  
Fax: 86-20-38601272  
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

### OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output Power	See below products program			6	W
Positive Voltage accuracy	Refer to recommended circuit		$\pm 1$	$\pm 3$	%
Negative Voltage accuracy	Refer to recommended circuit		$\pm 3$	$\pm 5$	
Load Regulation	From 10% to 100% load		$\pm 0.5$	$\pm 2^*$	
Line Regulation(at full load)	Input voltage from low to high		$\pm 0.2$	$\pm 0.5$	
Temperature Drift(Vout)	Refer to recommended circuit		0.02		%/°C
Ripple**	20MHz bandwidth		20	50	mVp-p
Noise**	20MHz bandwidth		50	100	
Switching Frequency	100% load,nominal Input voltage		300		KHz

\*Dual output models unbalanced load:  $\pm 5\%$

\*\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


## COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage Humidity				95	%
Storage Temperature		-40		85	°C
Operating Temp.		-55		125	
Temp. rise at full load			40		
Lead Temperature	1.5mm from case for 10 seconds			300	
Cooling		Free air convection			
Case Material		Copper, Nickel plated			
Short Circuit Protection		Continuous, automatic recovery			
Isolation voltage	Flash tested for 60 seconds	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
MTBF		1000			K hours
Weight			17		g


Note:

- All specifications measured at  $T_A=25^{\circ}\text{C}$ , humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- See below recommended circuits for more details.

## TYPICAL CHARACTERISTICS

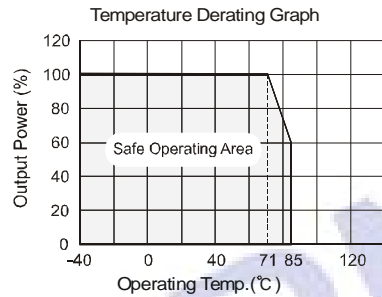

## OUTLINE DIMENSIONS & FOOTPRINT DETAILS

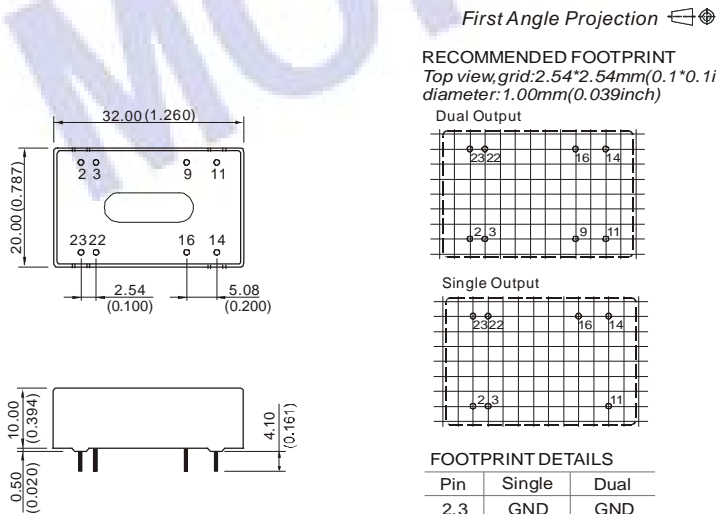


Note:

- Unit:mm(inch)  
 Pin section: 0.50\*0.30mm(0.020\*0.012inch)  
 Pin tolerances:  $\pm 0.10\text{mm}$  ( $\pm 0.004\text{inch}$ )  
 General tolerances:  $\pm 0.25\text{mm}$  ( $\pm 0.010\text{inch}$ )

## APPLICATION NOTE

### Recommended Circuit

All the PWA\_MD-6W & PWB\_MD-6W Series have been tested according to the following recommended testing circuit before leaving factory. (See Figure 1).

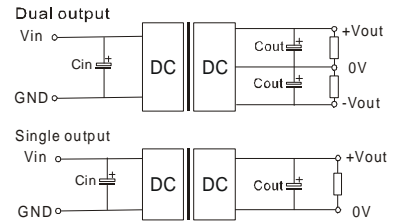

(Figure 1)


If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high. (See table 1).

EXTERNAL CAPACITOR TABLE (Table 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
24	10-47	3.3	2200	$\pm 5$	680
48	10-47	5	1000	$\pm 12$	470
-	-	12	470	$\pm 15$	330
-	-	15	330	$\pm 24$	220
-	-	24	220	-	-

### Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module. (See figure 2)



(Figure 2)

### Output Load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load **no less than 10% load**. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

**No parallel connection or plug and play.**