


WRA_CS-2W & WRB_CS-2W Series

2W, WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER

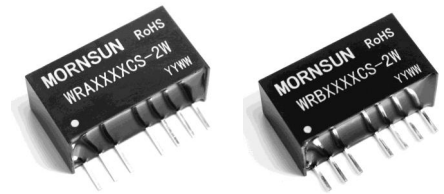

multi-country patent protection **RoHS**

FEATURES

- Miniature SIP Package
- Wide (2:1) Input Range
- Regulated Outputs
- I/O Isolation 1500VDC
- Short Circuit Protection(automatic recovery)
- External On/Off control
- Internal SMD construction
- Operating Temperature: -40°C to +85°C
- RoHS Compliance

APPLICATIONS


The WRA_CS-2W & WRB_CS-2W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage range $\leq 2:1$);
- 2) Where isolation is necessary between input and output(isolation voltage $\leq 1500\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

MODEL SELECTION

WRA0512CS-2W

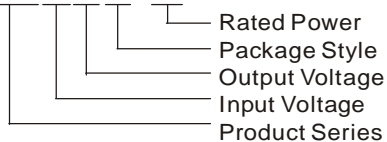

PRODUCT PROGRAM

Part Number	Input		No Load (mA)(Typ)	Output		Efficiency (% , Typ)	
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal(Range)	Max*			Max		Min
WRA0505CS-2W	5 (4.5-9.0)	11	40	±5	±200	±20	67
WRA0509CS-2W				±9	±111	±11	71
WRA0512CS-2W				±12	±83	±8	72
WRA0515CS-2W				±15	±67	±7	73
WRB0503CS-1W6				3.3	500	50	65
WRB0505CS-2W				5	400	40	68
WRB0509CS-2W				9	222	22	72
WRB0512CS-2W				12	167	16	73
WRB0515CS-2W				15	133	13	72
WRB0524CS-2W				24	80	8	73
WRA1205CS-2W				12 (9.0-18)	22	20	±5
WRA1209CS-2W	±9	±111	±11				76
WRA1212CS-2W	±12	±83	±8				78
WRA1215CS-2W	±15	±67	±7				78
WRB1203CS-1W6	3.3	500	50				72
WRB1205CS-2W	5	400	40				77
WRB1209CS-2W	9	222	22				79
WRB1212CS-2W	12	167	16				81
WRB1215CS-2W	15	133	13				80
WRB1224CS-2W	24	80	8				80
WRA2405CS-2W	24 (18-36)	40	10				±5
WRA2409CS-2W				±9	±111	±11	78
WRA2412CS-2W				±12	±83	±8	79
WRA2415CS-2W				±15	±67	±7	78
WRB2403CS-1W6				3.3	500	50	72
WRB2405CS-2W				5	400	40	77
WRB2409CS-2W				9	222	22	79
WRB2412CS-2W				12	167	16	81
WRB2415CS-2W				15	133	13	80
WRB2424CS-2W				24	80	8	80
WRA4805CS-2W				48 (36-72)	80	5	±5
WRA4809CS-2W	±9	±111	±11				78
WRA4812CS-2W	±12	±83	±8				80
WRA4815CS-2W	±15	±67	±7				80
WRB4803CS-1W6	3.3	500	50				71
WRB4805CS-2W	5	400	40				75
WRB4809CS-2W	9	222	22				79
WRB4812CS-2W	12	167	16				80
WRB4815CS-2W	15	133	13				79
WRB4824CS-2W	24	80	8				80

* Input voltage can't exceed this value, or will cause the permanent damage.

Note: Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

MORNSUN Science & Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax:86-20-38601272
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage Humidity				95	%
Operating Temperature		-40		85	°C
Storage Temperature		-50		125	
Temp. Rise at Full Load			15	35	
Lead Temperature	1.5mm from case for 10 seconds			300	
Isolation voltage	Tested for 1 minute and 1mA max	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation Capacitance	100KHz,1V		80		PF
No-load power consumption			100		mW
Cooling		Free Air Convection			
Short Circuit Protection		Continuous			
Case Material		Plastic(UL94-V0)			
MTBF		1000			K hours
Weight			5.5		g

OUTPUT SPECIFICATIONS


Item	Test Conditions	Min	Typ	Max	Units
Output Voltage accuracy	Input voltage range refer to output load		±1	±3	%
Load Regulation	10% to 100% load(WRB_CS-2W)		±0.5	±0.75	
	10% to 100% load(WRA_CS-2W)		±0.5	±1.0	
Line Regulation	Input voltage from Low To high		±0.2	±0.5	% / °C
Temperature Drift (Vout)	Refer to recommended circuit			±0.03	
Ripple & Noise *	20MHz Bandwidth		35	100	mVp-p
Switching Frequency	Input voltage range 100% load	180-500(PFM)			KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


Note:

- All specifications measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- See below recommended circuits for more details.

TYPICAL TEMPERATURE CURVE

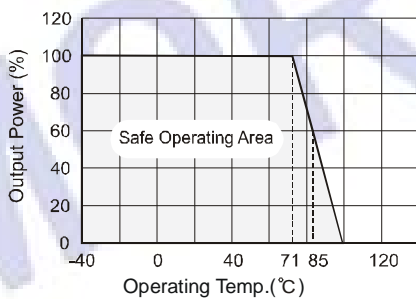

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

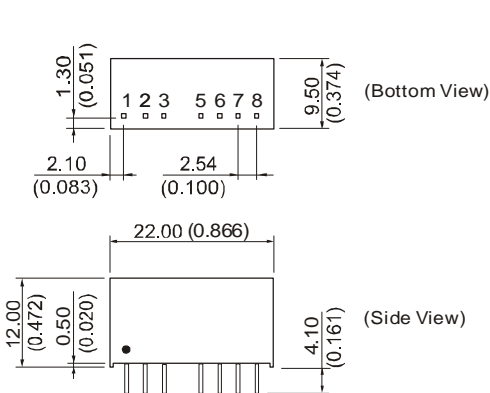


Note:

Unit:mm(inch)
Pin section:0.50*0.30mm(0.020*0.012inch)
Pin section tolerances:±0.10mm(±0.004inch)
General tolerances:±0.25mm(±0.010inch)

First Angle Projection

RECOMMENDED FOOTPRINT
Top view, grid:2.54mm(0.1inch),
diameter:1.00mm(0.039inch)

Dual Output & Single Output



FOOTPRINT DETAILS

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	CTRL	CTRL
5	NC	NC
6	+Vo	+Vo
7	0V	0V
8	CS	-Vo

NC:No Connection

APPLICATION NOTE

CTRL Terminal


When open or high impedance, the converter work well; When this pin is 'high'; the converter shutdown; It should be note that the input current (I_c) should between 5-10mA, exceeding the maximum 20mA will cause permanence damage to the converter. The value of R Can be derived as follows :

$$R = \frac{V_c - V_D - 1.0}{I_c}$$


Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

Single Output

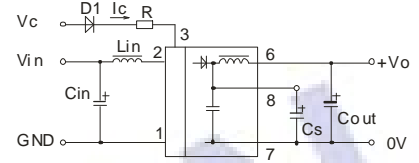

Dual Output

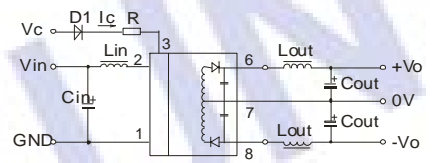

(Figure 1)

However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1). General:

C_{in} : 5V,12V 100μF
24V,48V 10μF - 22μF
 L_{in} : 4.7μH - 120μH
 C_{out} : 100μF(typ)
 L_{out} : 2.2μH-10μH
 C_s : 10μF - 22μF


External Capacitor Table(Table 1)

Single Vout (VDC)	Cout (μF)	Dual Vout (VDC)	Cout (μF)
3.3	2200	-	-
5	1000	±5	560
9	820	±9	470
12	680	±12	330
15	560	±15	270
24	470	-	-

Input current

While using unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current I_p (Figure 2).

General: $I_p \leq 1.4 * I_{in-max}$



(Figure 2)

No parallel connection or plug and play.