



20S 2.4 ϕ ×7

超小型保险丝管(中等延时型) MICROFUSE (MEDIUM SLOW-BLOW)

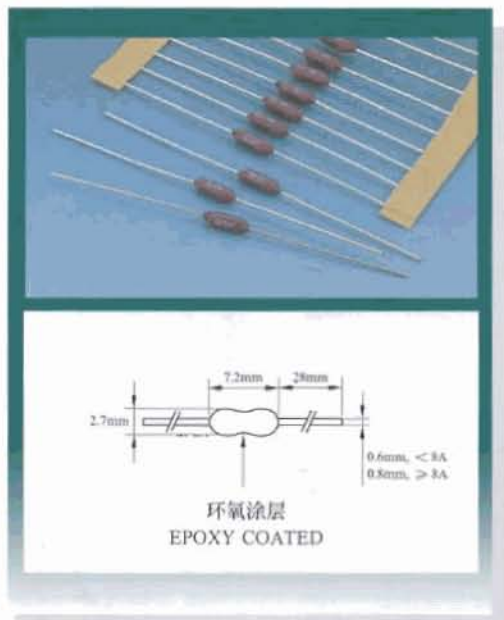

环氧涂层
EPOXY COATED

I-T CHARACTERISTICS CURVE
电流-时间曲线图

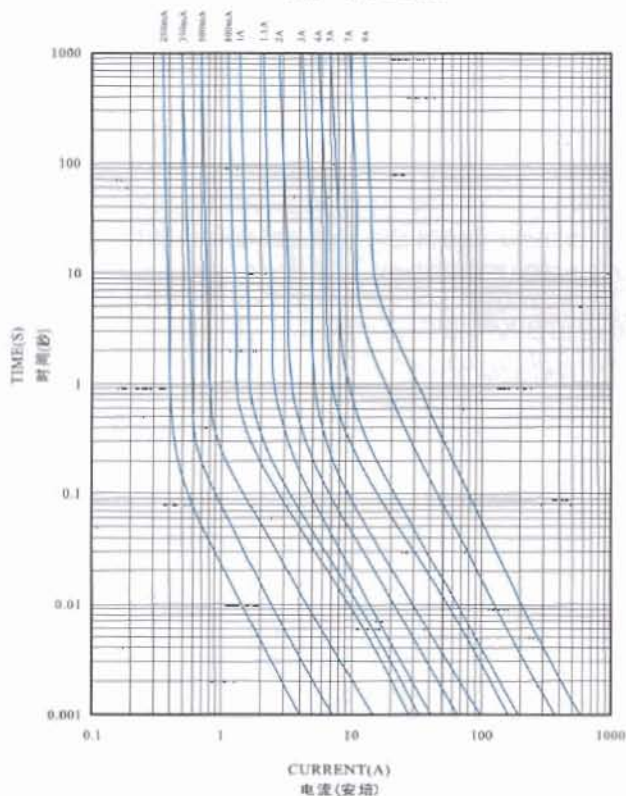

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS						I ² T 参考值 REFERENCE (A ² .S)	
		CCC		UL		CSA			PSE
		H	H	L	H	L	L		
0200H/L	200mA	●	●	●	●	●		0.036	
0250H/L	250mA	●	●	●	●	●		0.062	
0300H/L	300mA		●	●	●	●		0.071	
0315H/L	315mA	●	●	●	●	●		0.085	
0350H/L	350mA		●	●	●	●		0.093	
0375H/L	375mA		●	●	●	●		0.098	
0400H/L	400mA		●	●	●	●		0.115	
0500H/L	500mA	●	●	●	●	●		0.151	
0600H/L	600mA		●	●	●	●		0.194	
0630H/L	630mA	●	●	●	●	●		0.211	
0750H/L	750mA		●	●	●	●		0.341	
0800H/L	800mA	●	●	●	●	●		0.467	
010H/L	1A	●	●	●	●	●	●	0.641	
012H/L	1.2A		●	●	●	●	●	0.783	
013H/L	1.25A	●	●	●	●	●	●	0.933	
015H/L	1.5A		●	●	●	●	●	1.035	
016H/L	1.6A	●	●	●	●	●	●	1.85	
020H/L	2A	●	●	●	●	●	●	2.30	
025H/L	2.5A	●	●	●	●	●	●	2.68	
030H/L	3A		●	●	●	●	●	4.23	
032H/L	3.15A	●	●	●	●	●	●	5.34	
035H/L	3.5A		●	●	●	●	●	8.24	
040H/L	4A	●	●	●	●	●	●	12.86	
050H/L	5A	●	●	●	●	●	●	18.41	
060H/L	6A		●	●	●	●	●	15.53	
063H/L	6.3A	●	●	●	●	●	●	22.24	
070H/L	7A		●	●	●	●	●	30.42	
080H/L	8A		●	●	●	●	●	56.38	
090H/L	9A		●	●	●	●	●	83.42	
100H/L	10A		●	●	●	●	●	90.79	

H DENOTES FOR 250V (H表示250V)

L DENOTES FOR 125V (L表示125V)

● DENOTES FOR APPROVED (●表示已取得认证)

分断电流:

INTERRUPTING RATING:

50 amperes at 125V/250V AC (200mA-10A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快4小时)
200%	60sec Max (最慢60秒)