



30TS 3.6^φ × 10

延时型保险丝管 SLOW-BLOW FUSE

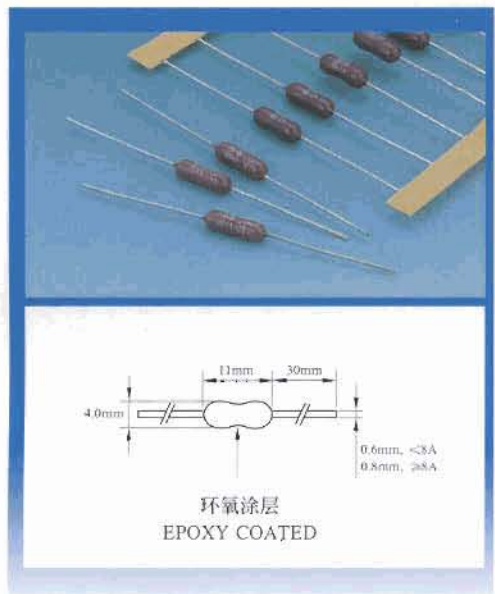

I-T CHARACTERISTICS CURVE
电流-时间曲线图

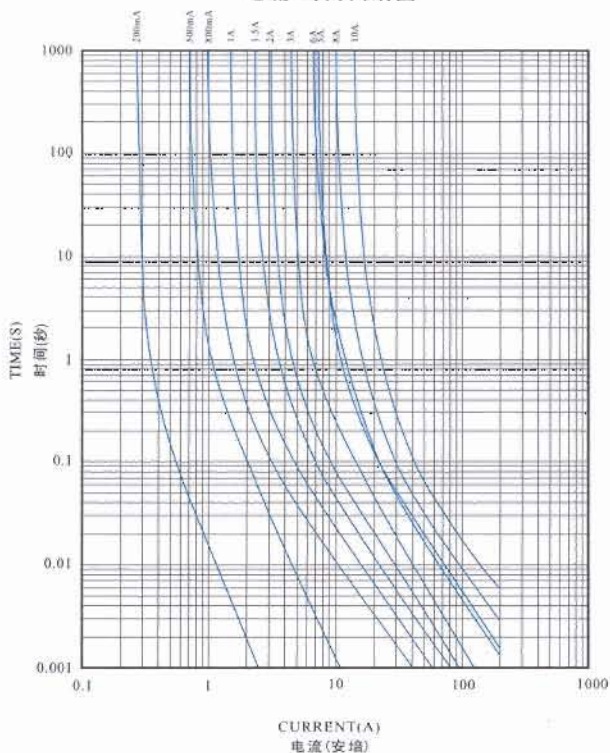

| 目录编号 CATALOG NO. | 额定电流 AMPERE RATING | 认证 APPROVALS | | | | | | | | | | I ² t 参考值 REFERENCE (A ² S) | |
|---------------------------------------|-----------------------|----------------|----------------|----------------|---|----------------|----------------|-----|----------------|-----|---|--|-------|
| | | CCC VDE | | UL | | UR | | CSA | | PSE | | | |
| | | H ₂ | H ₁ | H ₂ | L | H ₁ | H ₂ | L | H ₂ | L | | | |
| 0200H ₁ /H ₂ /L | 200mA | ● | | | | | | | | | | | 0.045 |
| 0250H ₁ /H ₂ /L | 250mA | ● | ● | | | | | | | | | | 0.072 |
| 0300H ₁ /H ₂ /L | 300mA | | | | | | | | | | | | 0.09 |
| 0315H ₁ /H ₂ /L | 315mA | ● | ● | | | | | | | | | | 0.11 |
| 0350H ₁ /H ₂ /L | 350mA | | | | | | | | | | | | 0.14 |
| 0375H ₁ /H ₂ /L | 375mA | | | | | | | | | | | | 0.16 |
| 0400H ₁ /H ₂ /L | 400mA | | | | | | | | | | | | 0.18 |
| 0500H ₁ /H ₂ /L | 500mA | ● | ● | | | | | | | | | | 0.28 |
| 0600H ₁ /H ₂ /L | 600mA | | | | | | | | | | | | 0.45 |
| 0630H ₁ /H ₂ /L | 630mA | ● | ○ | | | | | | | | | | 0.50 |
| 0700H ₁ /H ₂ /L | 700mA | | | | | | | | | | | | 0.65 |
| 0750H ₁ /H ₂ /L | 750mA | | | | | | | | | | | | 0.78 |
| 0800H ₁ /H ₂ /L | 800mA | ● | | | | | | | | | | | 1.8 |
| 010H ₁ /H ₂ /L | 1A | ● | ● | | | | | | | | ● | ● | 3.2 |
| 012H ₁ /H ₂ /L | 1.2A | | | | | | | | | | | | 4.3 |
| 013H ₁ /H ₂ /L | 1.25A | ● | ○ | | | | | | | | | | 5.1 |
| 015H ₁ /H ₂ /L | 1.5A | | | | | | | | | | | | 6.4 |
| 016H ₁ /H ₂ /L | 1.6A | ● | ● | | | | | | | | | | 7.1 |
| 020H ₁ /H ₂ /L | 2A | ● | ● | | | | | | | | | | 9.8 |
| 023H ₁ /H ₂ /L | 2.25A | | | | | | | | | | | | 12 |
| 025H ₁ /H ₂ /L | 2.5A | ● | ● | | | | | | | | | | 16 |
| 030H ₁ /H ₂ /L | 3A | | | | | | | | | | | | 23 |
| 032H ₁ /H ₂ /L | 3.15A | ● | ○ | | | | | | | | | | 27 |
| 035H ₁ /H ₂ /L | 3.5A | | | | | | | | | | | | 33 |
| 040H ₁ /H ₂ /L | 4A | ● | ○ | | | | | | | | | | 41 |
| 050H ₁ /H ₂ /L | 5A | ● | ● | | | | | | | | | | 68 |
| 060H ₁ /H ₂ /L | 6A | | | | | | | | | | | | 81 |
| 063H ₁ /H ₂ /L | 6.3A | ● | ○ | | | | | | | | | | 112 |
| 070H ₁ /H ₂ /L | 7A | | | | | | | | | | | | 156 |
| 080H ₁ /H ₂ /L | 8A | | | | | | | | | | | | 202 |
| 090H ₁ /H ₂ /L | 9A | | | | | | | | | | | | 245 |
| 100H ₁ /H ₂ /L | 10A | | | | | | | | | | | | 303 |

H₁ DENOTES FOR 350V (H₁表示350V)

H₂ DENOTES FOR 250V (H₂表示250V)

L DENOTES FOR 125V (L表示125V)

- DENOTES FOR APPROVED (●表示已取得认证)
- DENOTES FOR PENDING (○表示申请中)

分断电流:

INTERRUPTING RATING:

50 amperes at 125V/250V/350V AC (100mA-10A)

电气特性 ELECTRICAL CHARACTERISTICS:

| 额定 RATING | 熔断时间 BLOWING TIME |
|-----------|---|
| 100% | 4 hours Min (最快4小时) |
| 200% | 60sec Max(最慢60秒)(200mA-800mA) 1-60sec(1-60秒)(1A-10A) |