



31NM,32NM $3.6\phi \times 10$

GLASS TUBE FUSE (FAST-BLOW)

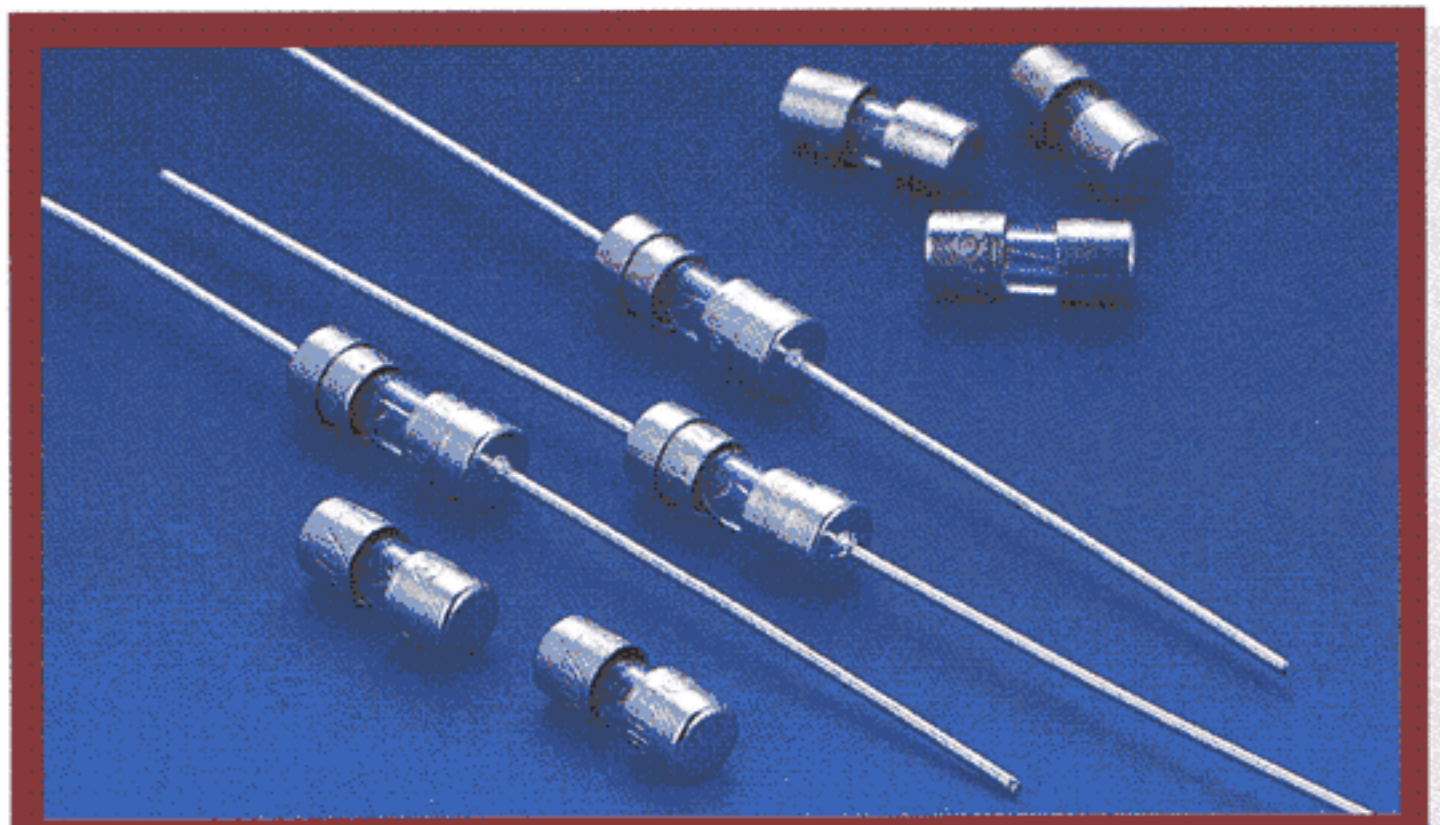


31NM

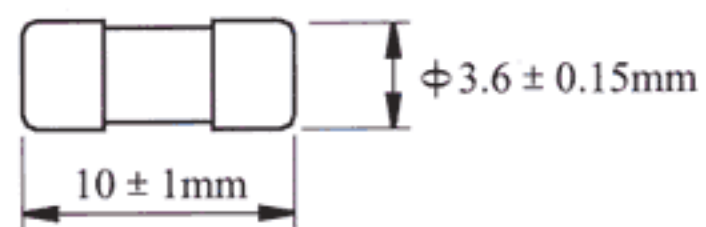


32NM

31NM(P)

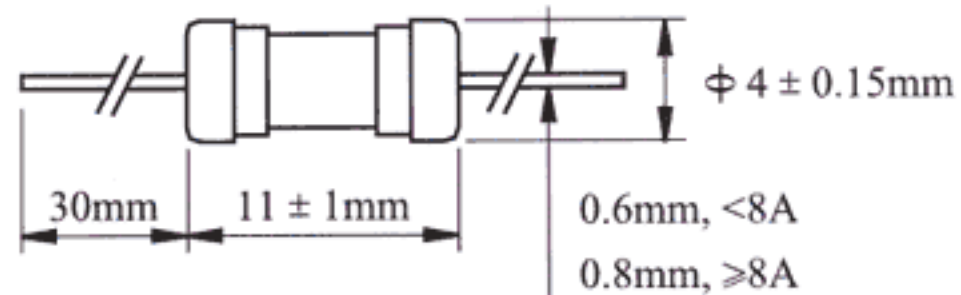

I-T CHARACTERISTICS CURVE

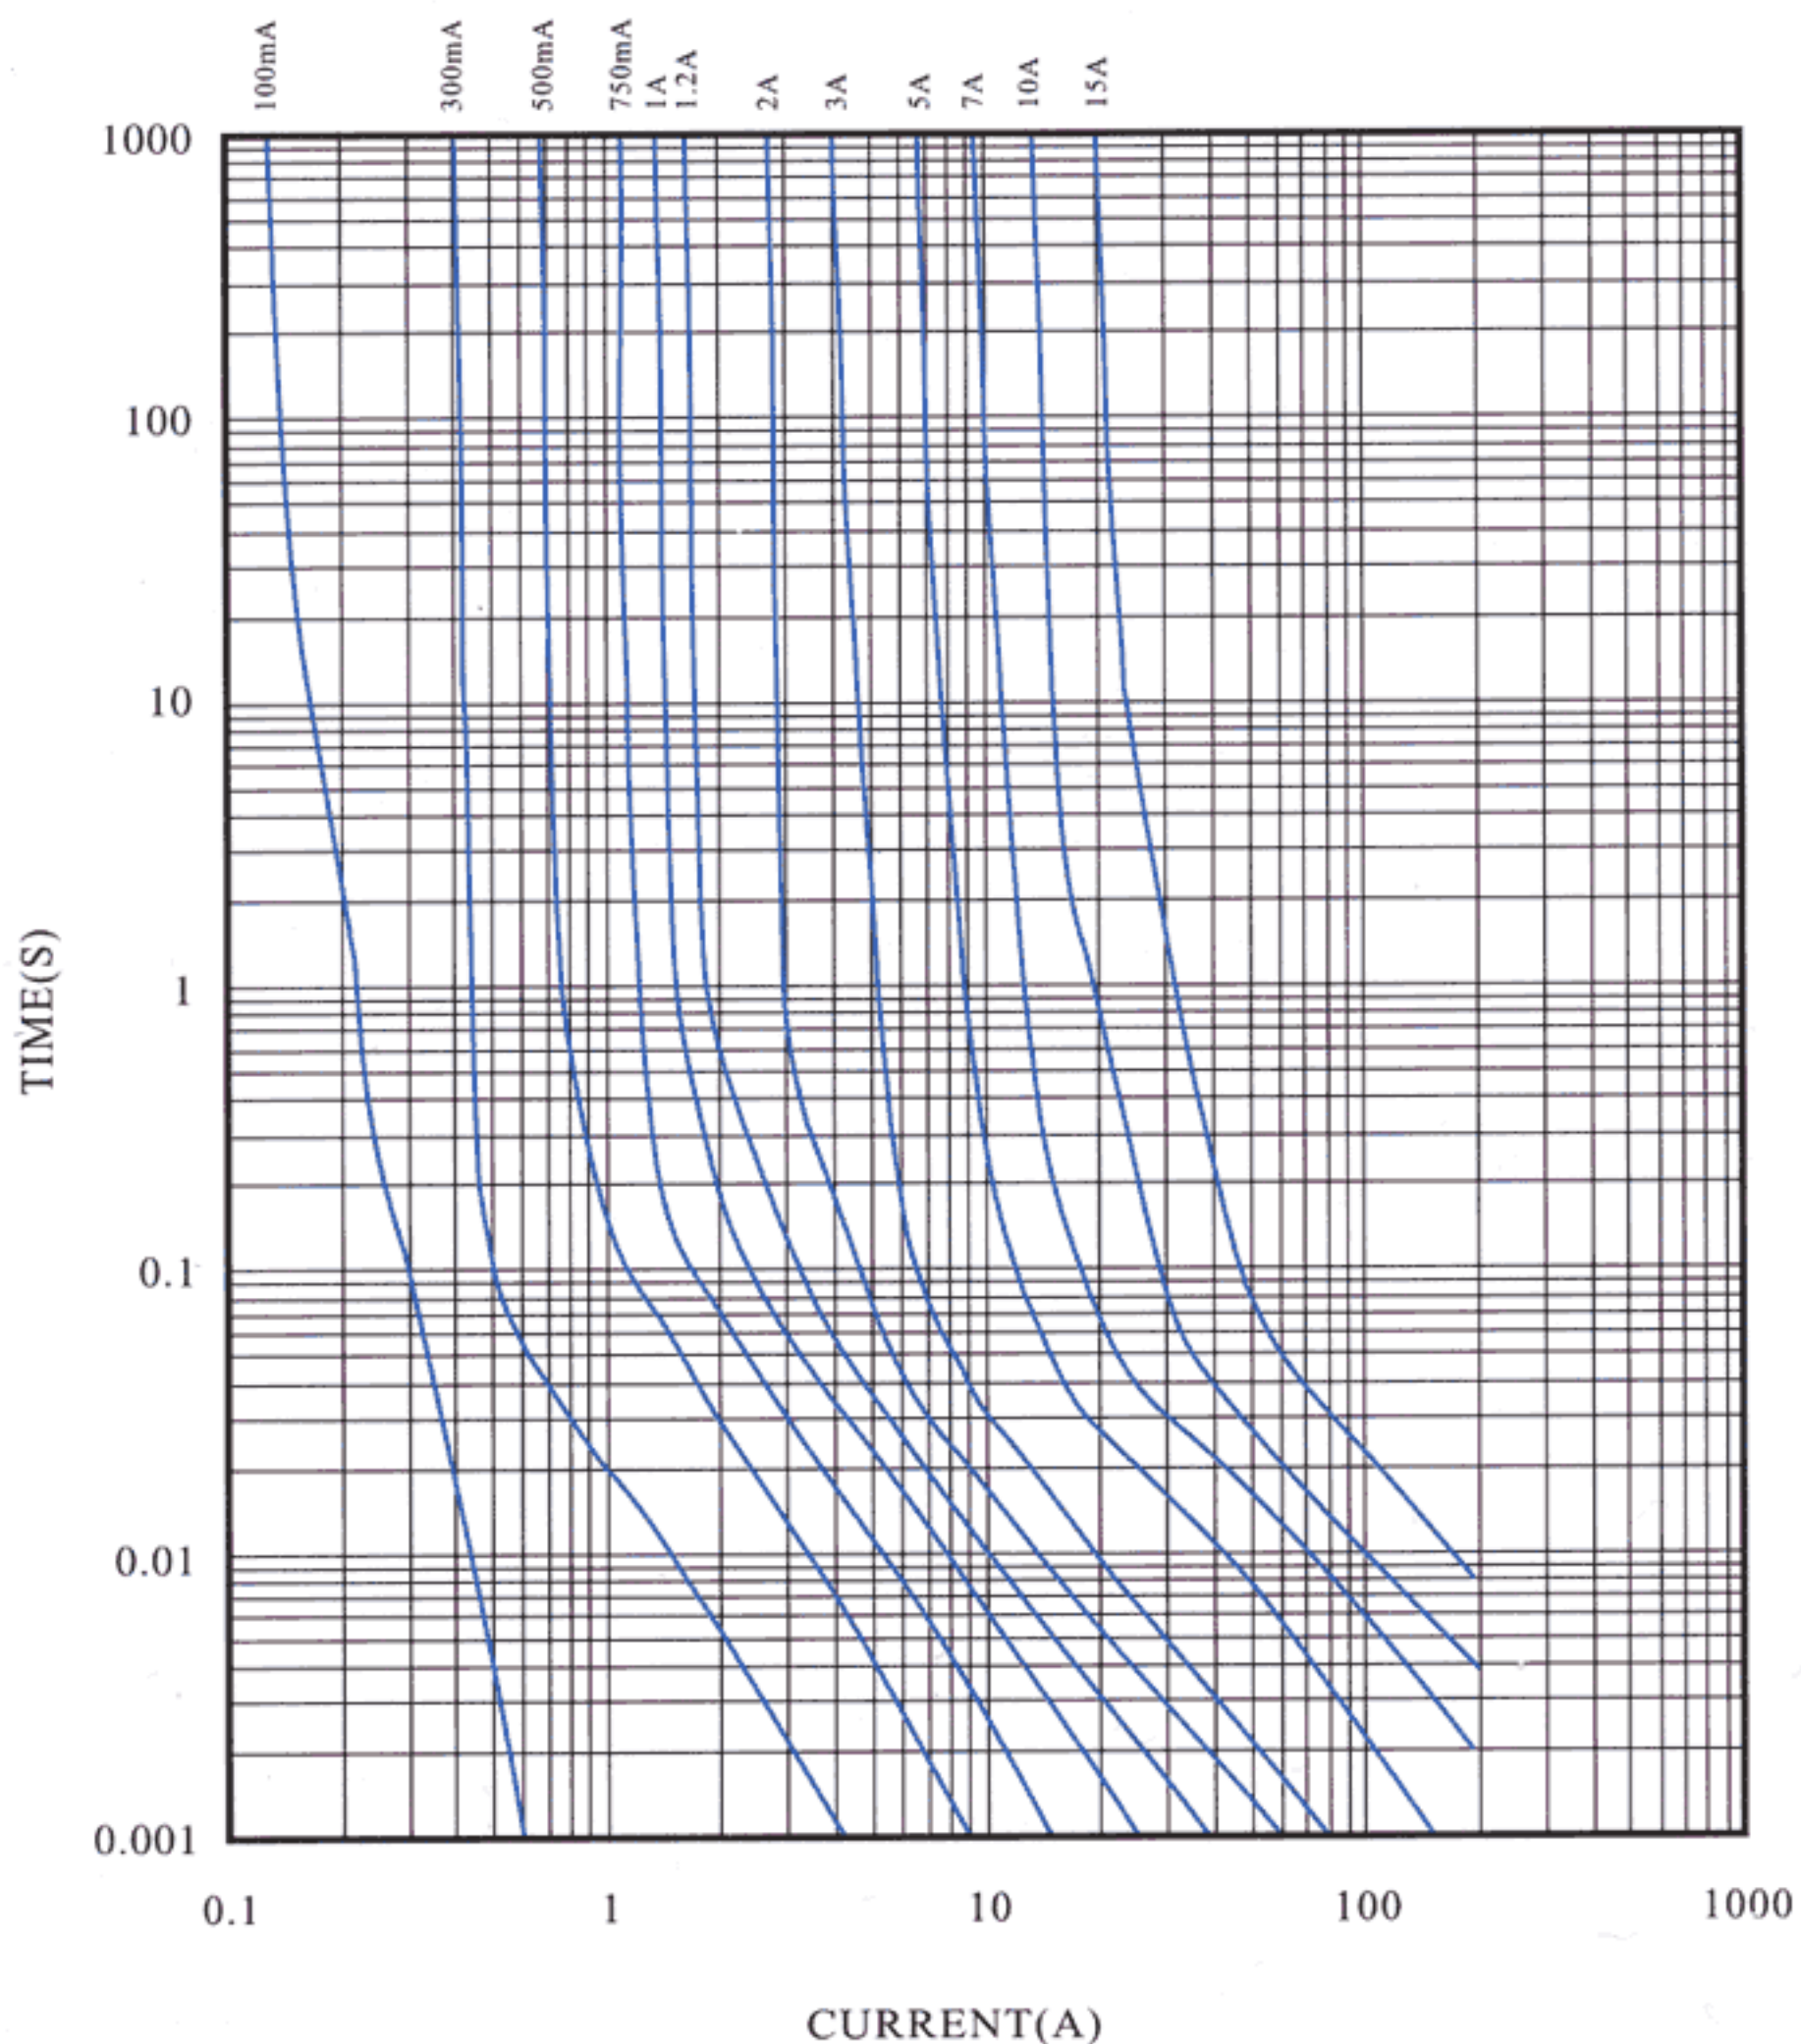

CATALOG NO.	AMPERE RATING	APPROVALS					I ² T REFERENCE (A ² .S)
		UL		CUL		CSA	
		H	L	H	L	L	
0100H/L	100mA	●	●	●		●	0.0016
0125H/L	125mA	●	●	●		●	0.0027
0150H/L	150mA	●	●	●		●	0.0037
0160H/L	160mA	●	●	●		●	0.0045
0200H/L	200mA	●	●	●		●	0.0070
0250H/L	250mA	●	●	●		●	0.012
0300H/L	300mA	●	●	●		●	0.020
0315H/L	315mA	●	●	●	●	●	0.023
0350H/L	350mA	●	●	●	●	●	0.028
0375H/L	375mA	●	●	●	●	●	0.032
0400H/L	400mA	●	●	●	●	●	0.037
0500H/L	500mA	●	●	●	●	●	0.068
0600H/L	600mA	●	●	●	●	●	0.12
0630H/L	630mA	●	●	●	●	●	0.15
0750H/L	750mA	●	●	●	●	●	0.36
0800H/L	800mA	●	●	●	●	●	0.41
010H/L	1A	●	●	●	●	●	0.65
012H/L	1.2A	●	●	●	●	●	1.5
013H/L	1.25A	●	●	●	●	●	1.7
015H/L	1.5A	●	●	●	●	●	2.1
016H/L	1.6A	●	●	●	●	●	2.4
020H/L	2A	●	●	●	●	●	3.8
023H/L	2.25A	●	●	●	●	●	4.2
025H/L	2.5A	●	●	●	●	●	4.6
030H/L	3A	●	●	●	●	●	6.1
032H/L	3.15A	●	●	●	●	●	6.7
035H/L	3.5A	●	●	●	●	●	14
040H/L	4A	●	●	●	●	●	18
050H/L	5A	●	●	●	●	●	28
060H/L	6A	●	●	●	●	●	40
063H/L	6.3A	●	●	●	●	●	46
070H/L	7A	●	●	●	●	●	57
080H/L	8A	●	●	●	●	●	74
090H/L	9A	●	●	●	●	●	110
100H/L	10A	●	●	●	●	●	135
120H/L	12A	●	●	●	●	●	195
150H/L	15A	●	●	●	●	●	303

H DENOTES FOR 250V

L DENOTES FOR 125V

● DENOTES FOR APPROVED

CUL APPROVED IS EQUIVALENT TO CSA APPROVED

INTERRUPTING RATING:

50 amperes at 125V AC (100mA-15A)

50 amperes at 250V AC (100mA-15A)

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
200%	60 sec Max