



31S,32S $3.6\phi \times 10$

GLASS TUBE FUSE (SLOW-BLOW)

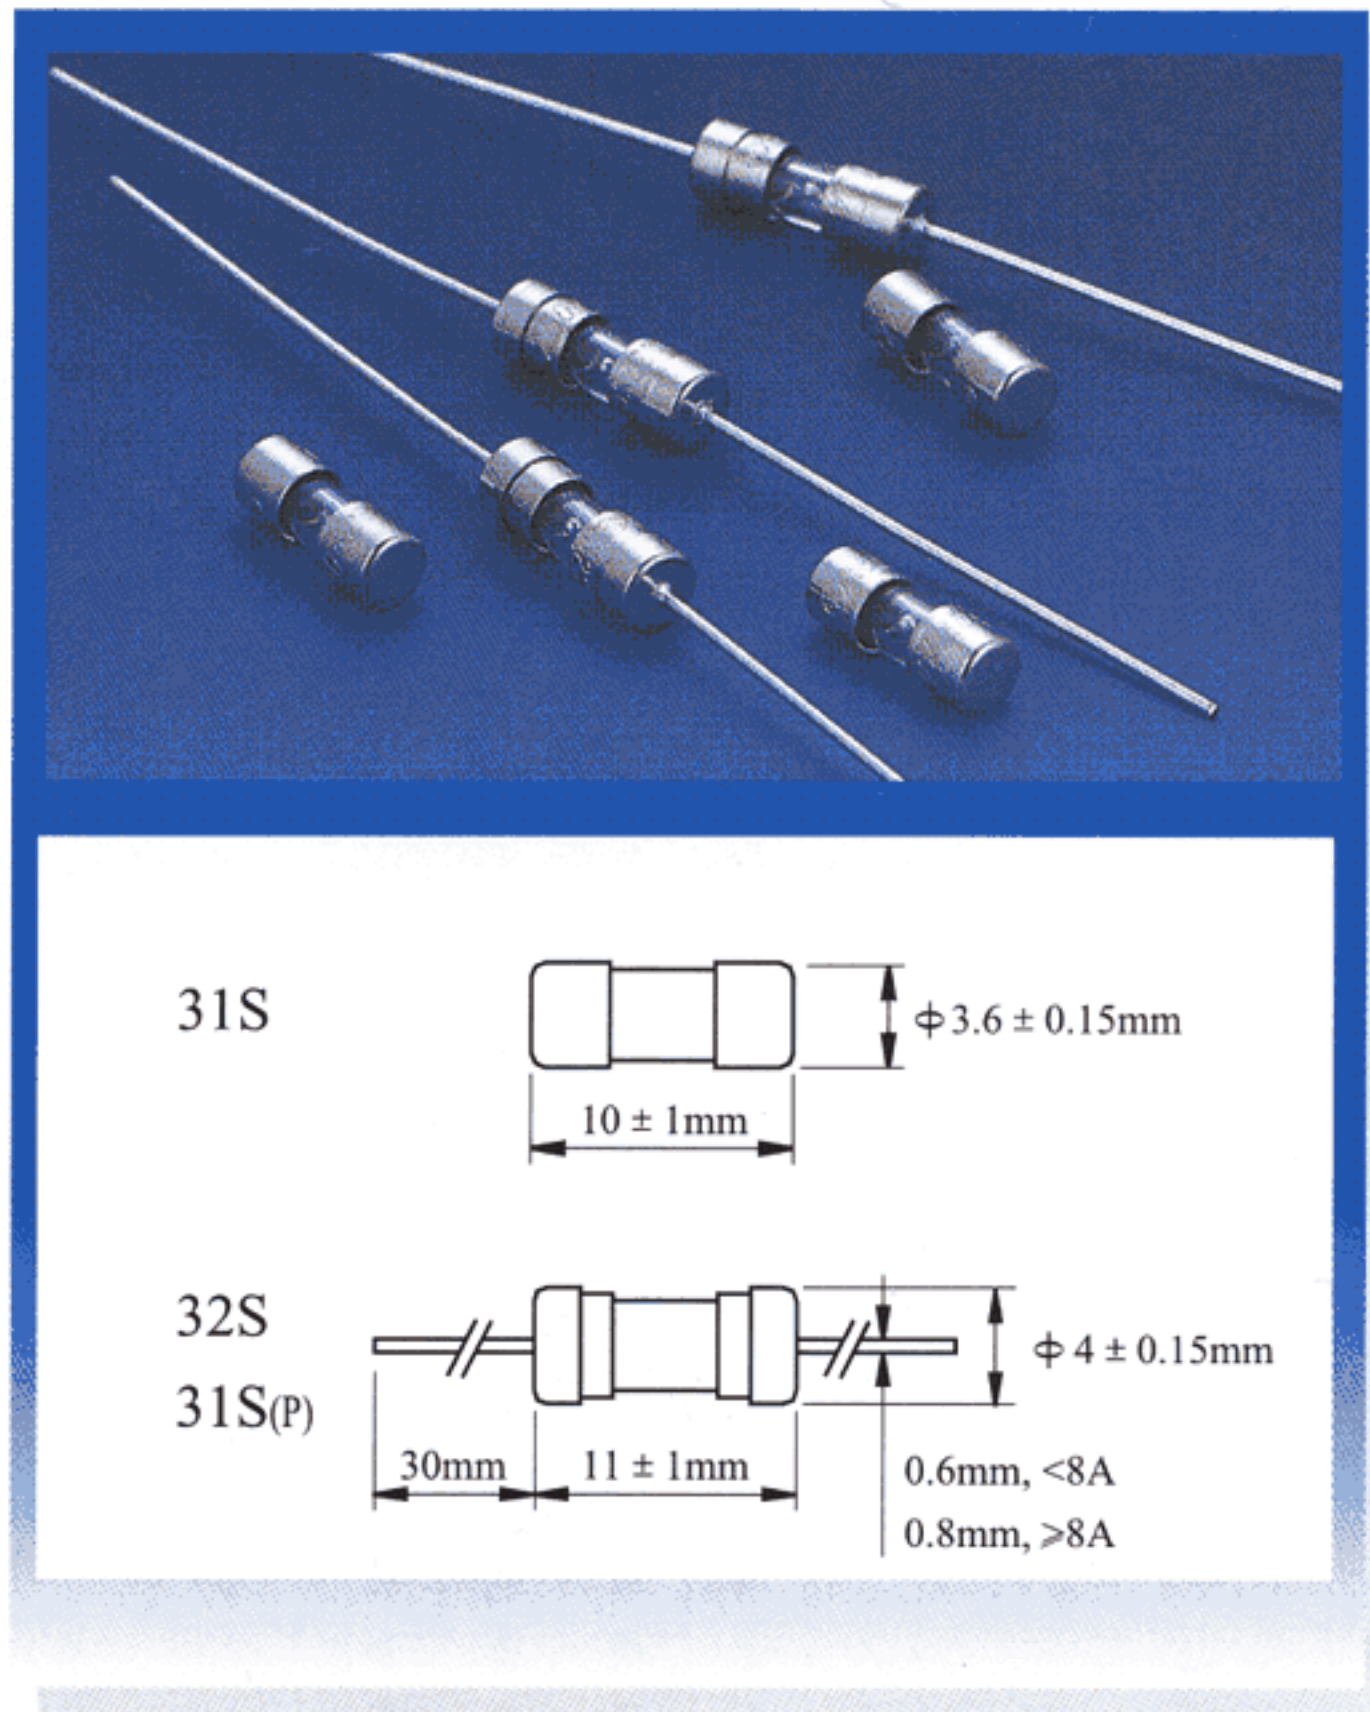

I-T CHARACTERISTICS CURVE

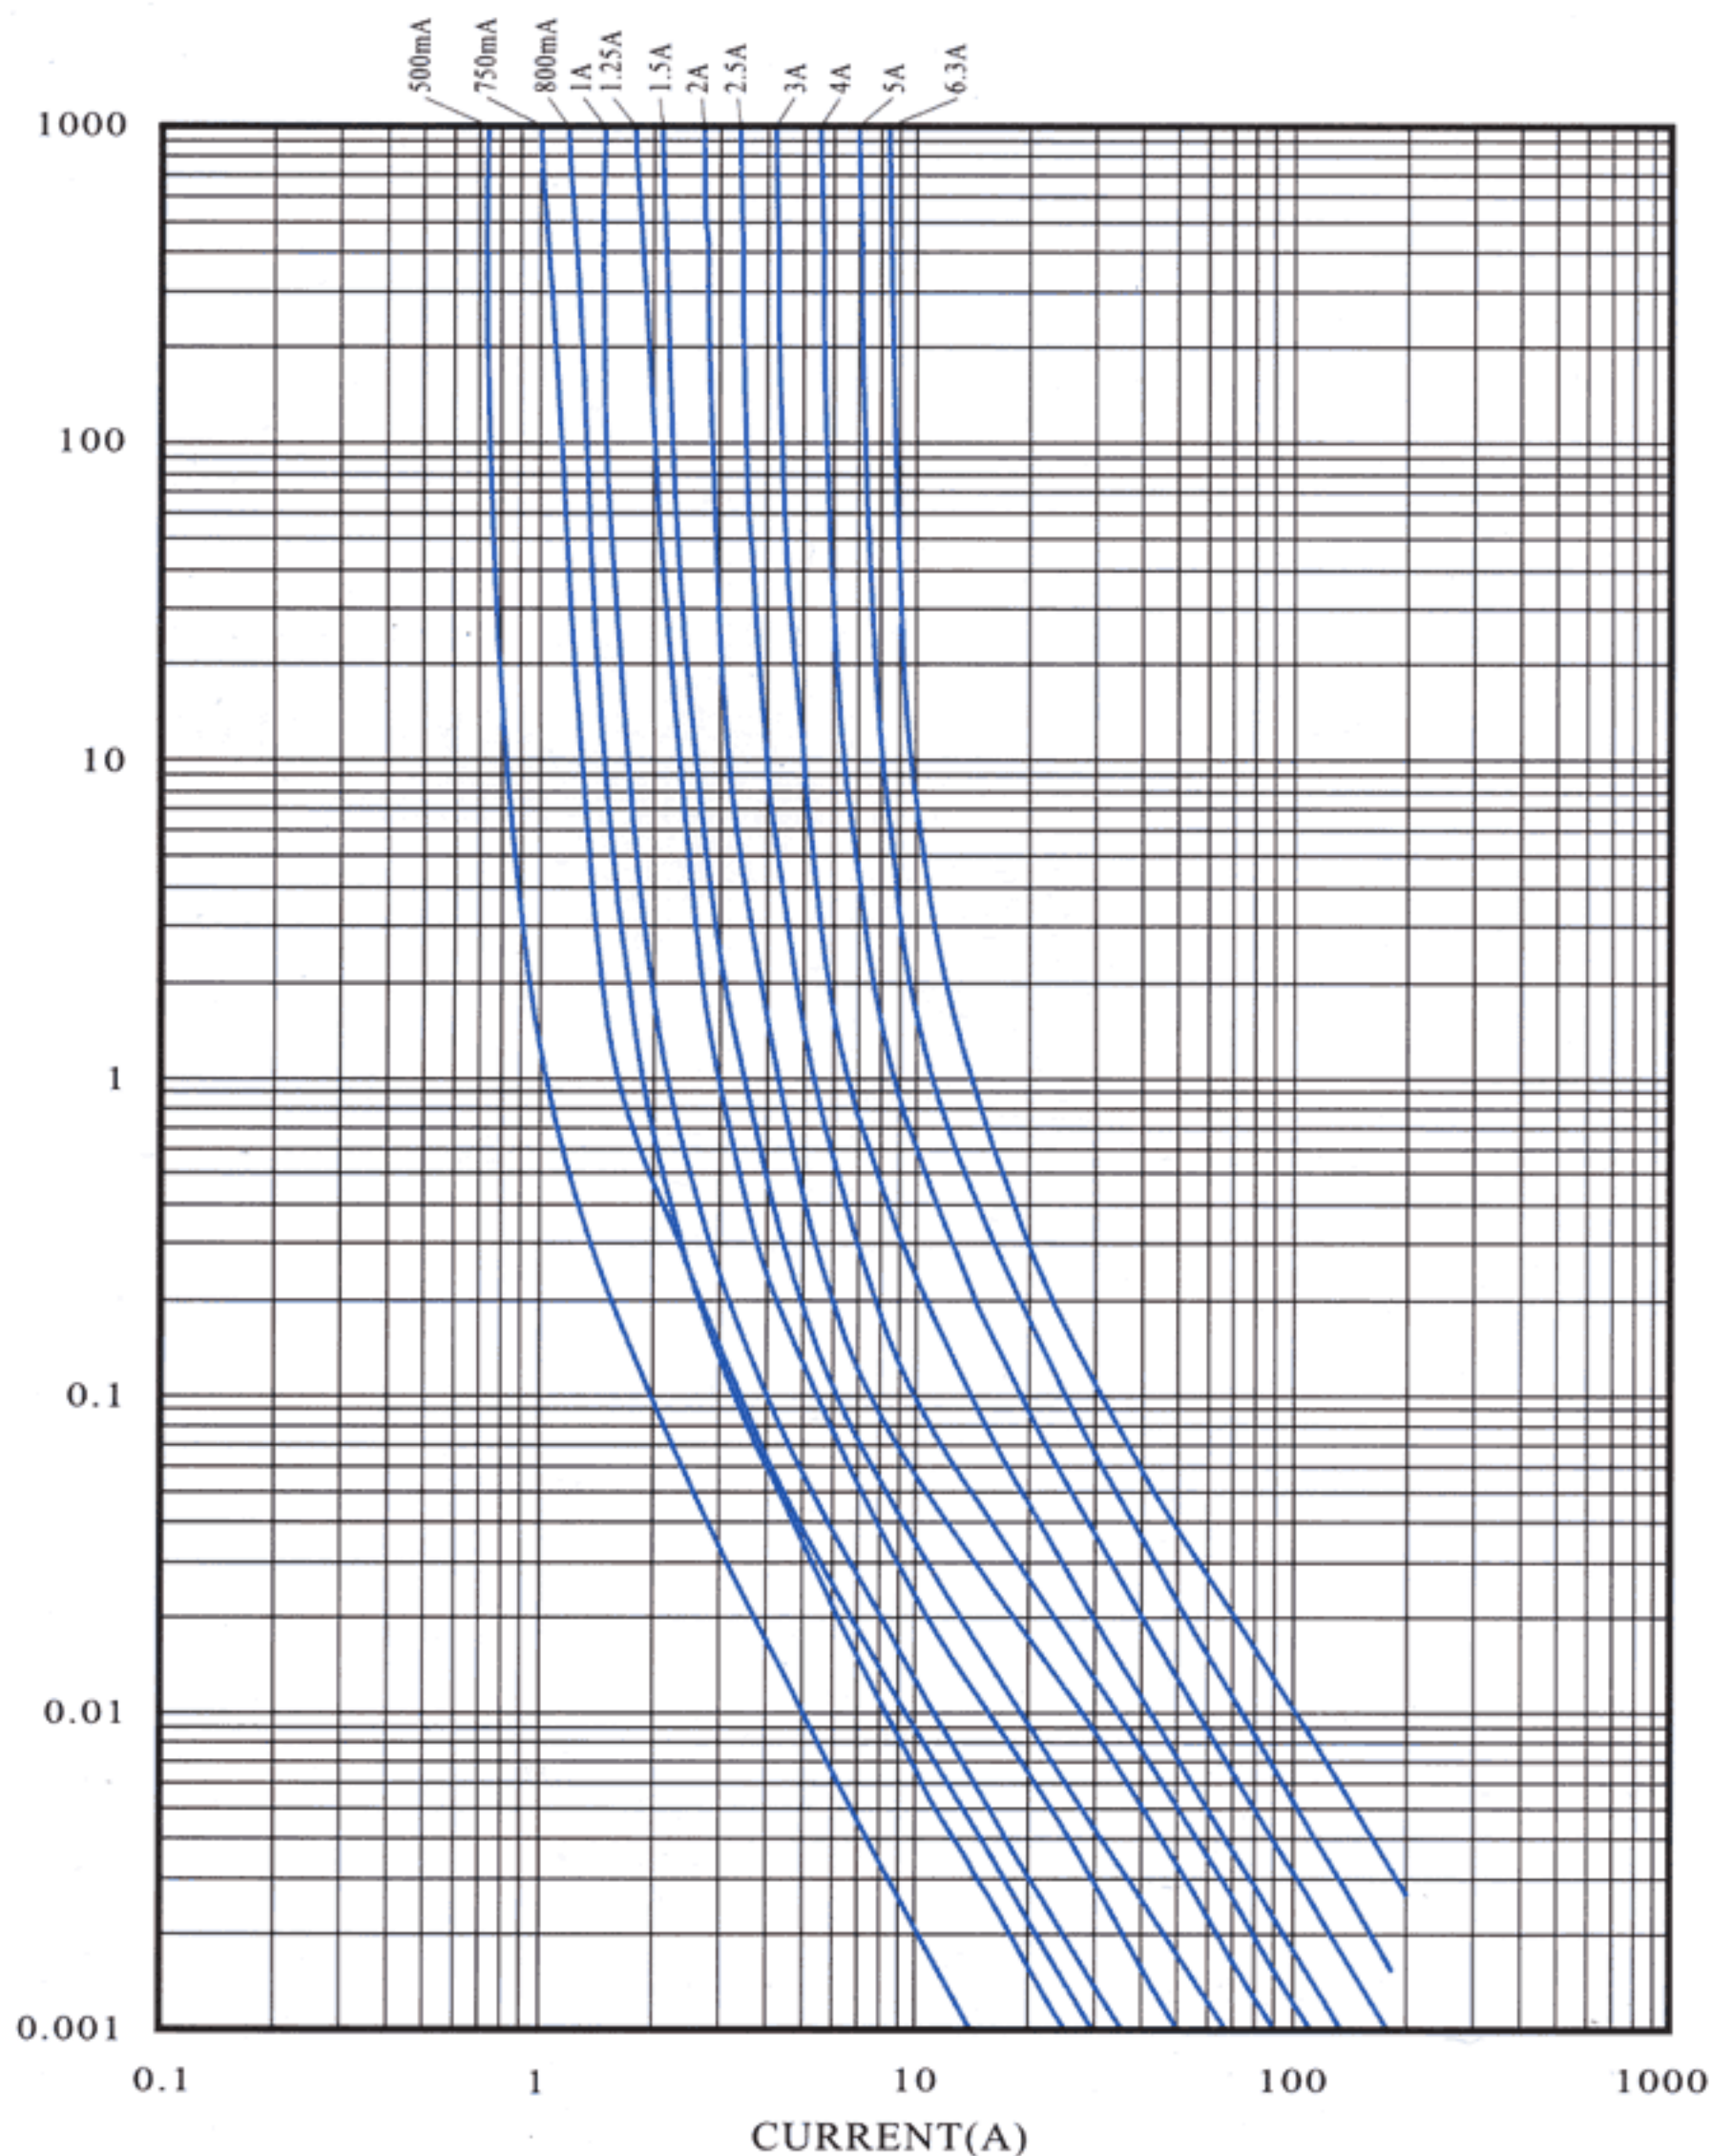

CATALOG NO.	AMPERE RATING	APPROVALS						I ² T REFERENCE (A ² .S)
		CCC	VDE	UL		CSA		
		H	H	H	L	H	L	
0100H/L	100mA	●			●	●	●	0.0078
0125H/L	125mA			●	●	●	●	0.015
0150H/L	150mA			●	●	●	●	0.026
0160H/L	160mA			●	●	●	●	0.030
0200H/L	200mA	●		●	●	●	●	0.048
0250H/L	250mA	●	●	●	●	●	●	0.075
0300H/L	300mA			●	●	●	●	0.11
0315H/L	315mA	●	●	●	●	●	●	0.12
0350H/L	350mA			●	●	●	●	0.15
0375H/L	375mA			●	●	●	●	0.17
0400H/L	400mA			●	●	●	●	0.19
0500H/L	500mA	●	●	●	●	●	●	0.30
0600H/L	600mA			●	●	●	●	0.43
0630H/L	630mA	●	○	●	●	●	●	0.48
0750H/L	750mA			●	●	●	●	0.68
0800H/L	800mA	●		●	●	●	●	1.2
010H/L	1A	●	●	●	●	●	●	2.0
012H/L	1.2A			●	●	●	●	2.8
013H/L	1.25A	●	○	●	●	●	●	3.1
015H/L	1.5A			●	●	●	●	4.5
016H/L	1.6A	●	●	●	●	●	●	5.1
020H/L	2A	●	●	●	●	●	●	8.0
023H/L	2.25A			●	●	●	●	10
025H/L	2.5A	●	●	●	●	●	●	13
030H/L	3A			●	●	●	●	18
032H/L	3.15A	●	○	●	●	●	●	20
035H/L	3.5A			●	●	●	●	25
040H/L	4A	●	○	●	●	●	●	32
050H/L	5A	●	●	●	●	●	●	54
060H/L	6A			●	●	●	●	61
063H/L	6.3A	●	○	●	●	●	●	95
070H/L	7A			●	●	●	●	131
080H/L	8A			●	●	●	●	171
090H/L	9A			●	●	●	●	216
100H/L	10A			●	●	●	●	264
120H/L	12A					●	●	380
150H/L	15A					●	●	594

H DENOTES FOR 250V
L DENOTES FOR 125V

● DENOTES FOR APPROVED
○ DENOTES FOR PENDING

REMARK: VDE APPROVAL ONLY FOR 32S

INTERRUPTING RATING:

50 amperes at 125V AC (100mA-15A)

50 amperes at 250V AC (100mA-15A)

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
200%	1-60 sec