



35S,36S $3.6\phi \times 10$

CERAMIC TUBE FUSE (SLOW-BLOW)

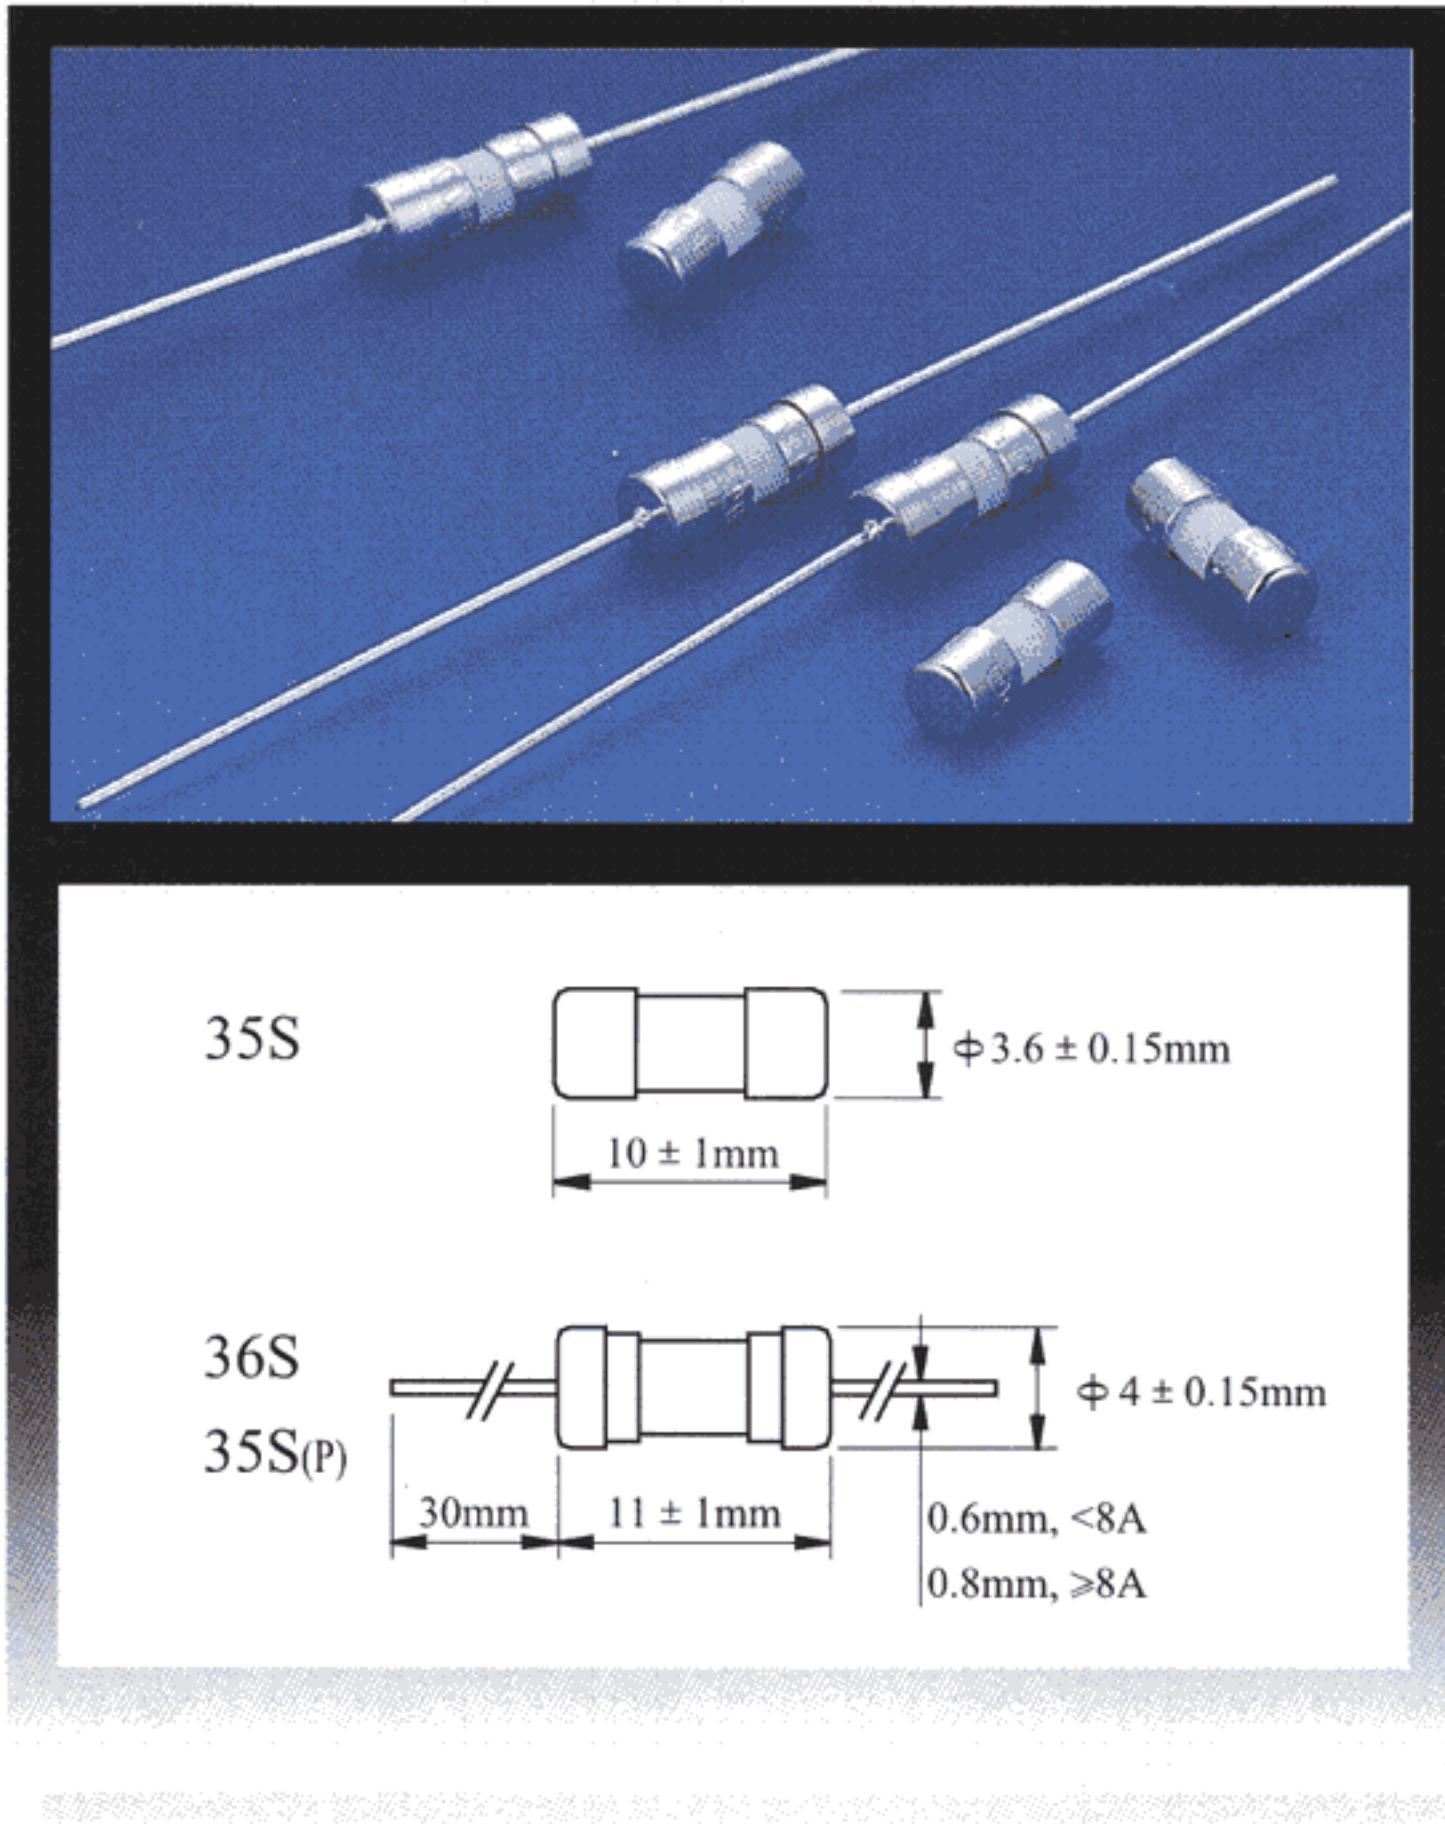

I-T CHARACTERISTICS CURVE

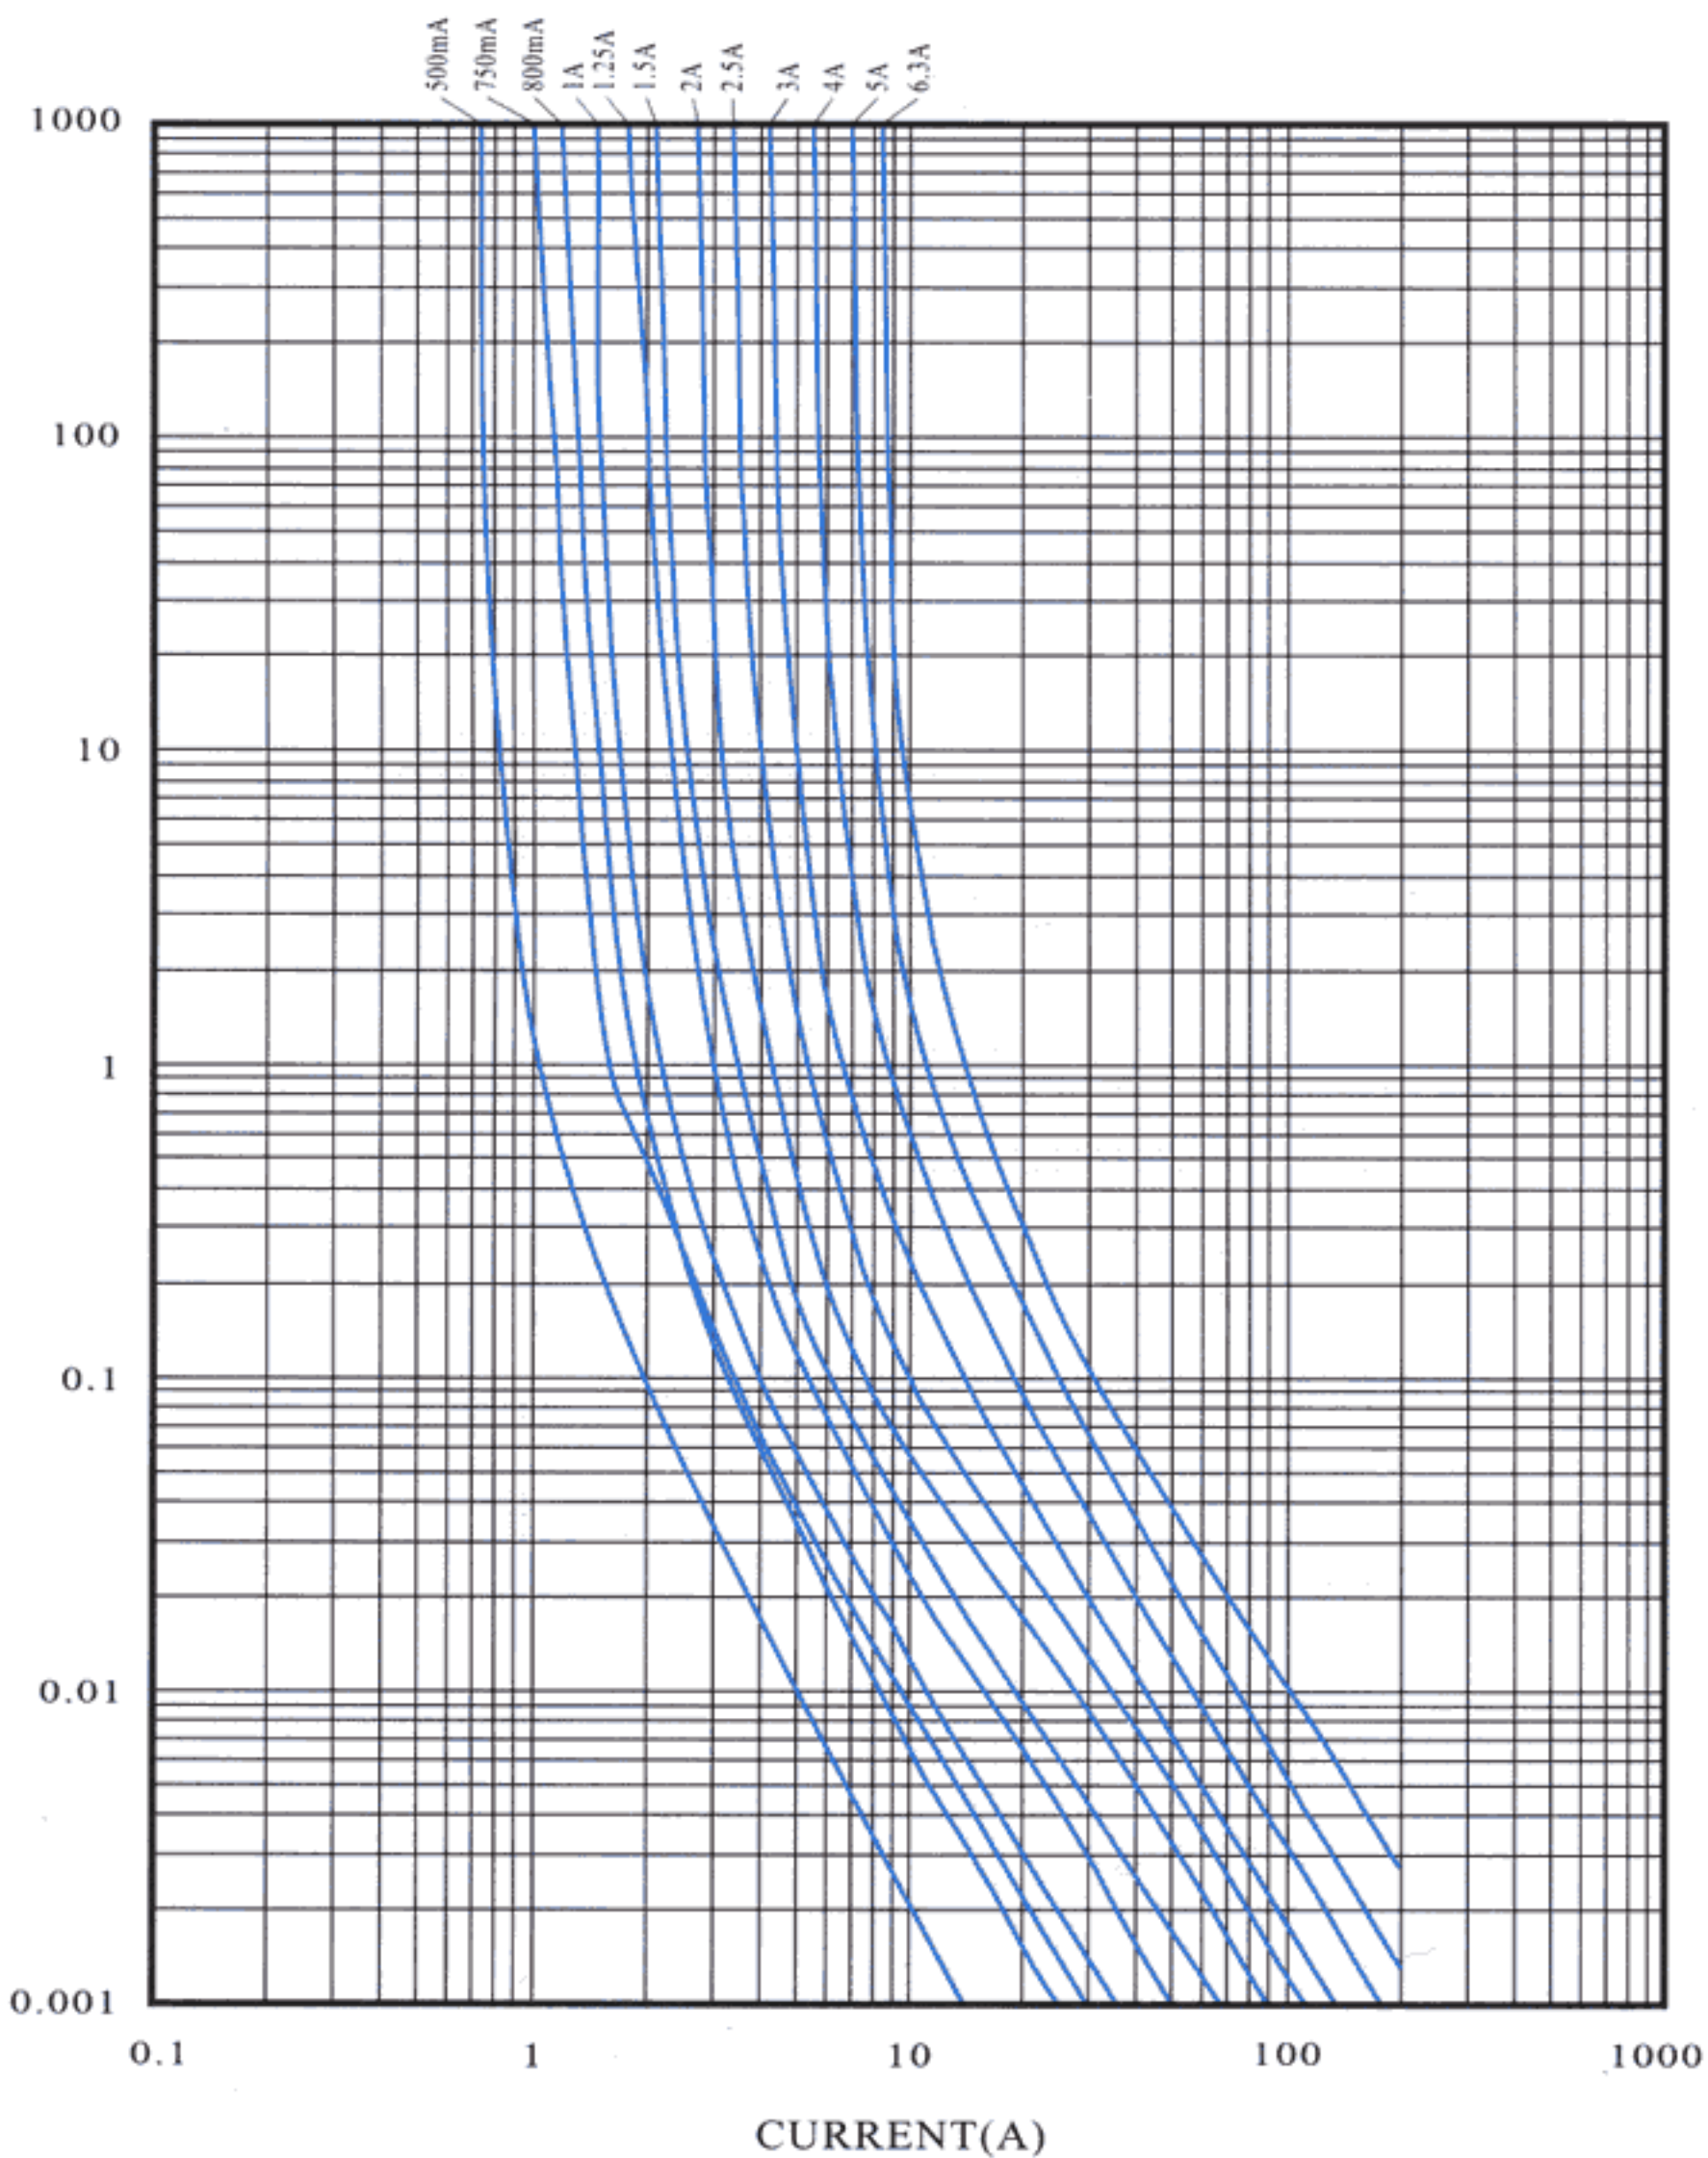

CATALOG NO.	AMPERE RATING	APPROVALS				I ² T REFERENCE (A ² .S)
		UL		CSA		
		H	L	H	L	
0032H/L	32mA	●	●	●	●	0.0009
0050H/L	50mA	●	●	●	●	0.0021
0063H/L	63mA	●	●	●	●	0.0031
0075H/L	75mA	●	●	●	●	0.0044
0080H/L	80mA	●	●	●	●	0.0050
0100H/L	100mA	●	●	●	●	0.0078
0125H/L	125mA	●	●	●	●	0.015
0150H/L	150mA	●	●	●	●	0.026
0160H/L	160mA	●	●	●	●	0.030
0200H/L	200mA	●	●	●	●	0.048
0250H/L	250mA	●	●	●	●	0.075
0300H/L	300mA	●	●	●	●	0.11
0315H/L	315mA	●	●	●	●	0.12
0350H/L	350mA	●	●	●	●	0.15
0375H/L	375mA	●	●	●	●	0.17
0400H/L	400mA	●	●	●	●	0.19
0500H/L	500mA	●	●	●	●	0.30
0600H/L	600mA	●	●	●	●	0.43
0630H/L	630mA	●	●	●	●	0.48
0750H/L	750mA	●	●	●	●	0.68
0800H/L	800mA	●	●	●	●	1.2
010H/L	1A				●	2.0
012H/L	1.2A				●	2.8
013H/L	1.25A				●	3.1
015H/L	1.5A				●	4.5
016H/L	1.6A				●	5.1
020H/L	2A				●	8.0
023H/L	2.25A				●	10
025H/L	2.5A	●	●		●	13
030H/L	3A	●	●		●	18
032H/L	3.15A	●	●		●	20
035H/L	3.5A	●	●		●	25
040H/L	4A	●	●		●	32
050H/L	5A	●	●		●	54
060H/L	6A	●	●		●	61
063H/L	6.3A	●	●		●	95
070H/L	7A	●	●		●	131
080H/L	8A	●	●		●	171
090H/L	9A	●	●		●	216
100H/L	10A	●	●		●	264
120H/L	12A					380
150H/L	15A					594

H DENOTES FOR 250V

L DENOTES FOR 125V

● DENOTES FOR APPROVED

INTERRUPTING RATING:

50 amperes at 125V AC (100mA-15A)

50 amperes at 250V AC (100mA-15A)

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
200%	1-60 sec