



41ST,42ST 4.5 ϕ × 15

GLASS TUBE FUSE (MEDIUM SLOW-BLOW)

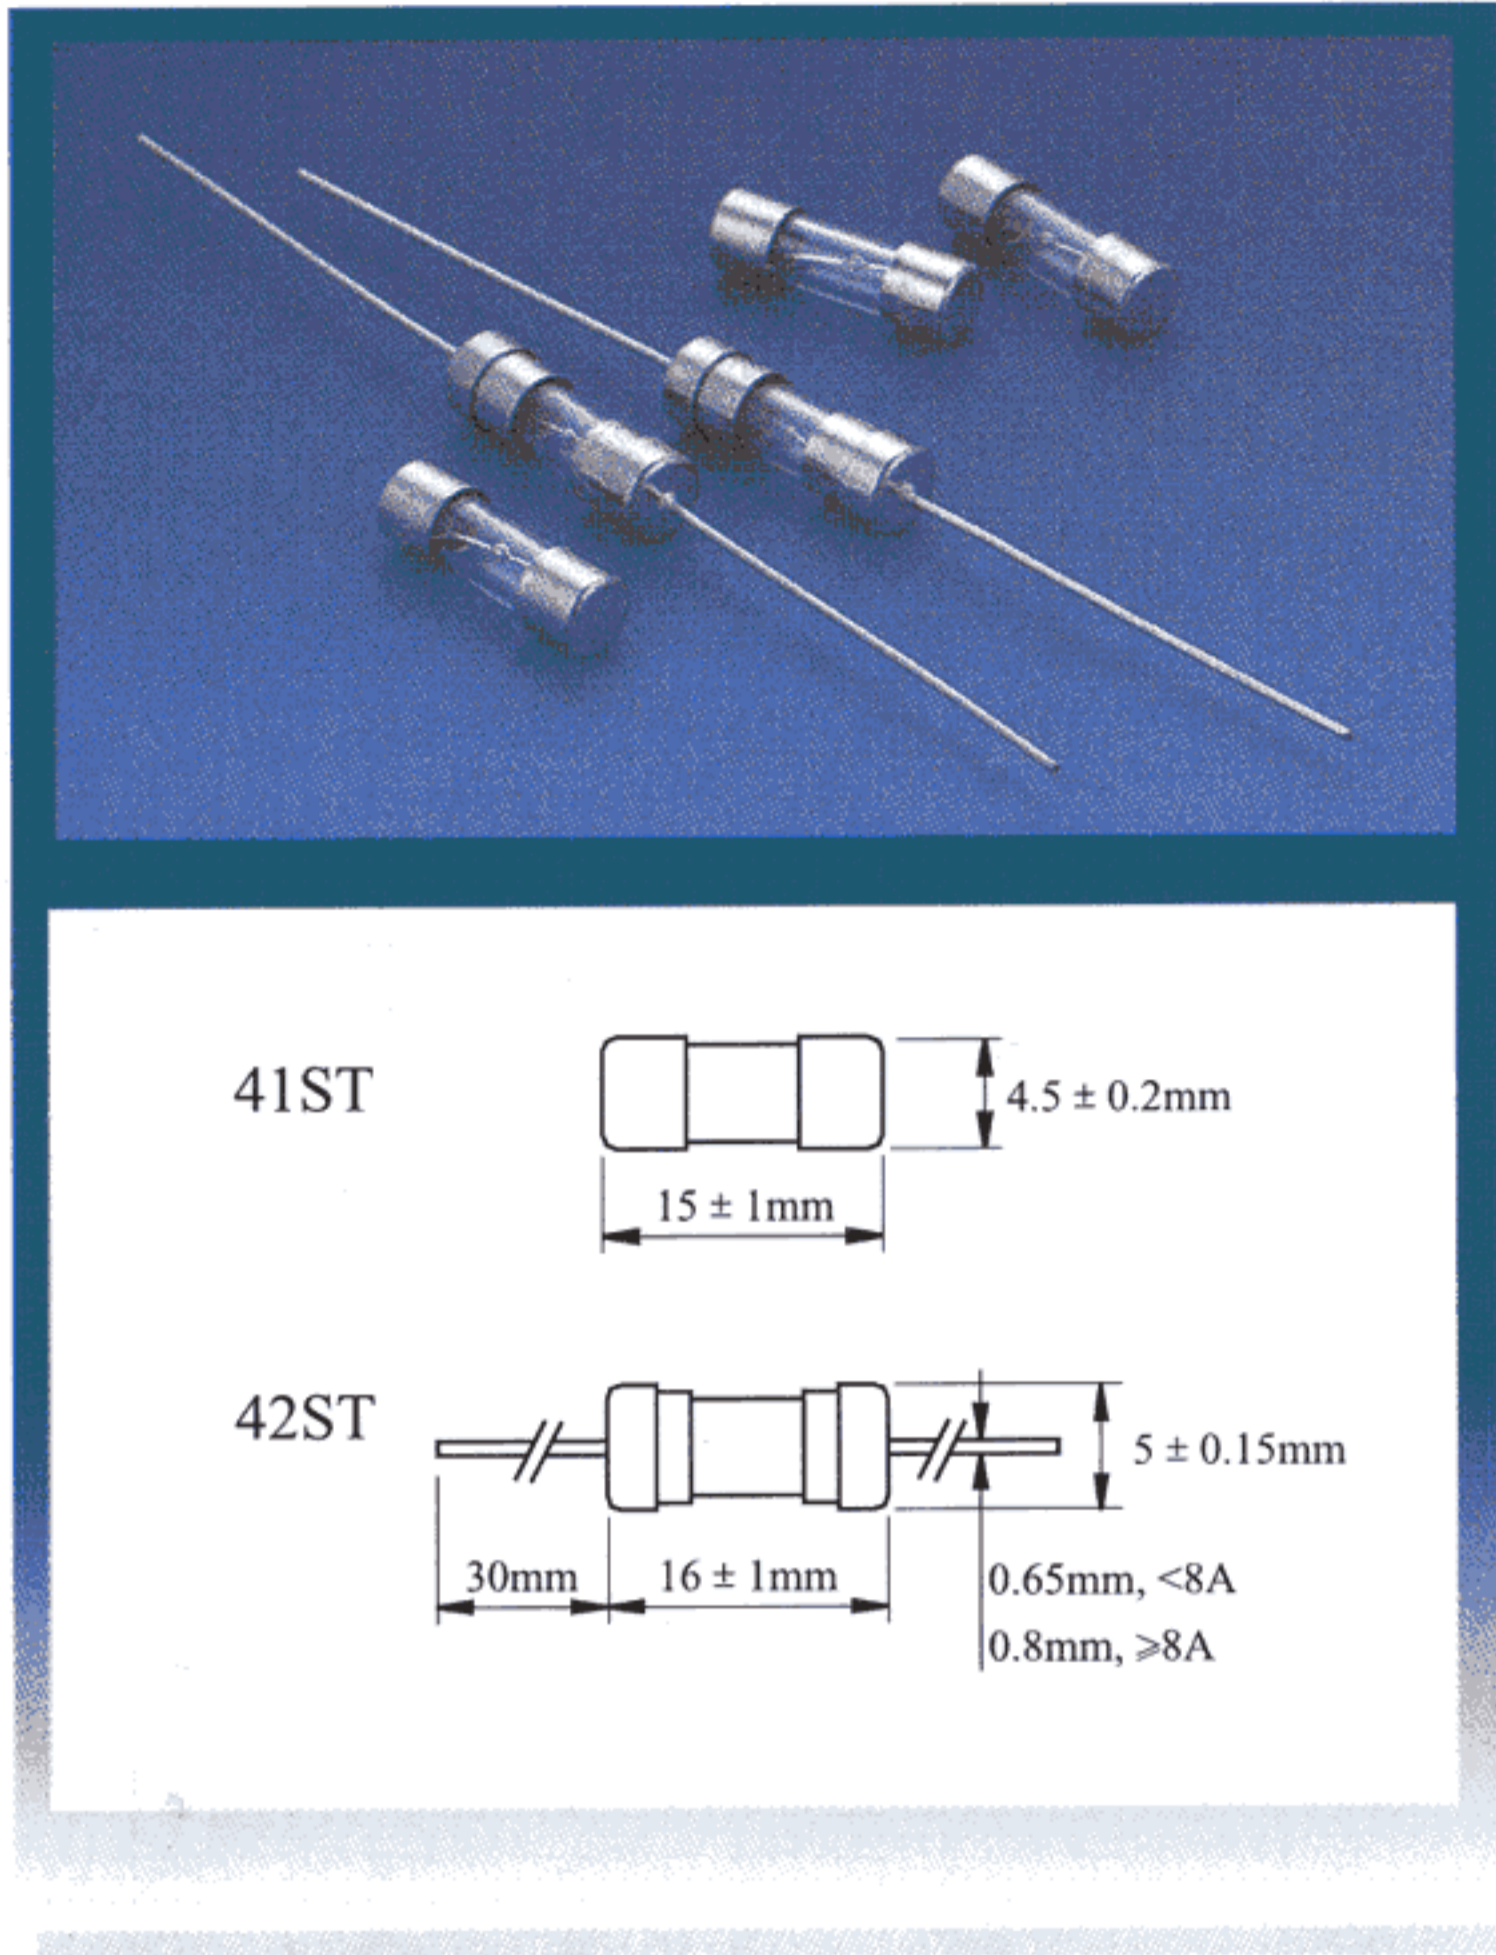

I-T CHARACTERISTICS CURVE

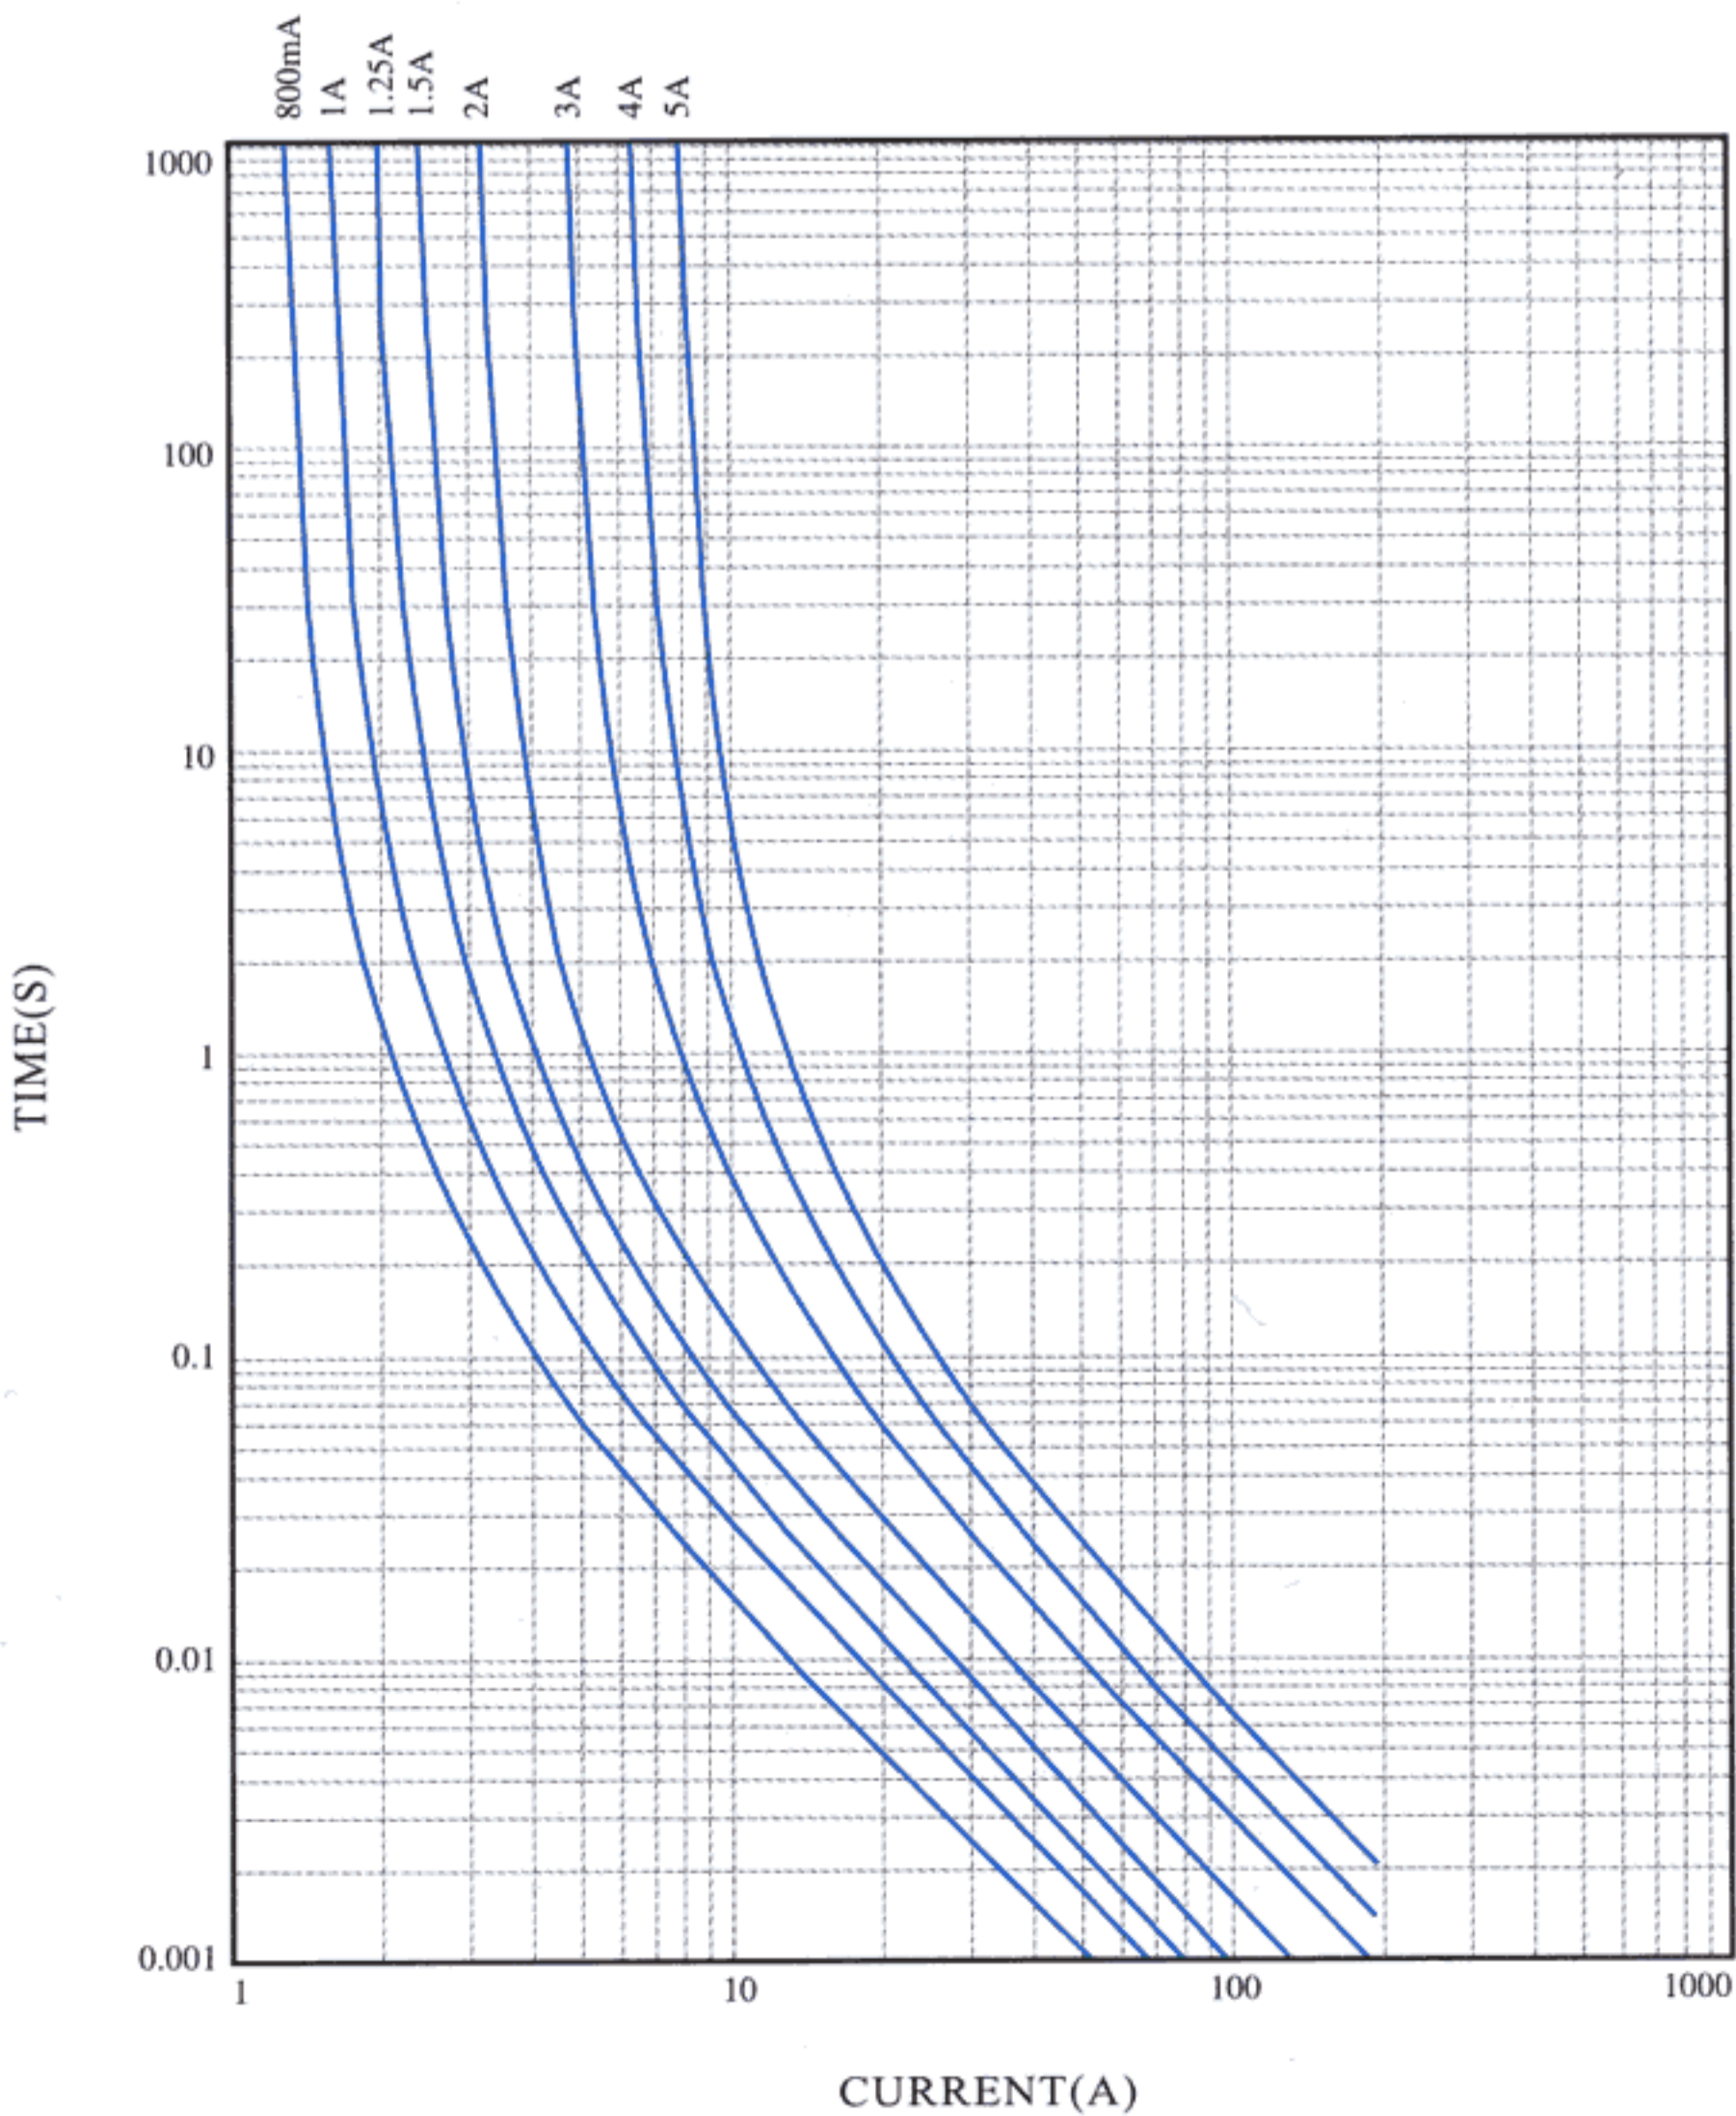

CATALOG NO.	AMPERE RATING	APPROVALS		I ² T REFERENCE (A ² .S)
		PSE		
		H	L	
0100H/L	100mA			0.0086
0125H/L	125mA			0.014
0150H/L	150mA			0.028
0160H/L	160mA			0.031
0200H/L	200mA			0.043
0250H/L	250mA			0.065
0300H/L	300mA			0.12
0315H/L	315mA			0.15
0350H/L	350mA			0.18
0375H/L	375mA			0.21
0400H/L	400mA			0.28
0500H/L	500mA			0.39
0600H/L	600mA			0.52
0630H/L	630mA			0.66
0700H/L	700mA			0.94
0750H/L	750mA			1.1
0800H/L	800mA			1.3
010H/L	1A	●	●	3.2
012H/L	1.2A	●	●	3.6
013H/L	1.25A	●	●	4.6
015H/L	1.5A	●	●	6.6
016H/L	1.6A	●	●	7.5
020H/L	2A	●	●	13
025H/L	2.5A	●	●	21
030H/L	3A	●	●	25
032H/L	3.15A	●	●	27
035H/L	3.5A	●	●	34
040H/L	4A	●	●	40
050H/L	5A	●	●	65
060H/L	6A	●	●	94
063H/L	6.3A	●	●	116
070H/L	7A	●	●	147
080H/L	8A	●	●	150
090H/L	9A	●	●	218
100H/L	10A	●	●	253
120H/L	12A	●	●	358
150H/L	15A	●	●	557

H DENOTES FOR 250V
 L DENOTES FOR 125V
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:
 500 amperes at 125V AC (1A-15A) PSE
 100 amperes at 250V AC (1A-15A) PSE

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
130%	1 hour Min
160%	1 hour Max
200%	120 sec Max