



41NM, 42NM  $4.5^\phi \times 15$

GLASS TUBE FUSE ( FAST-BLOW)

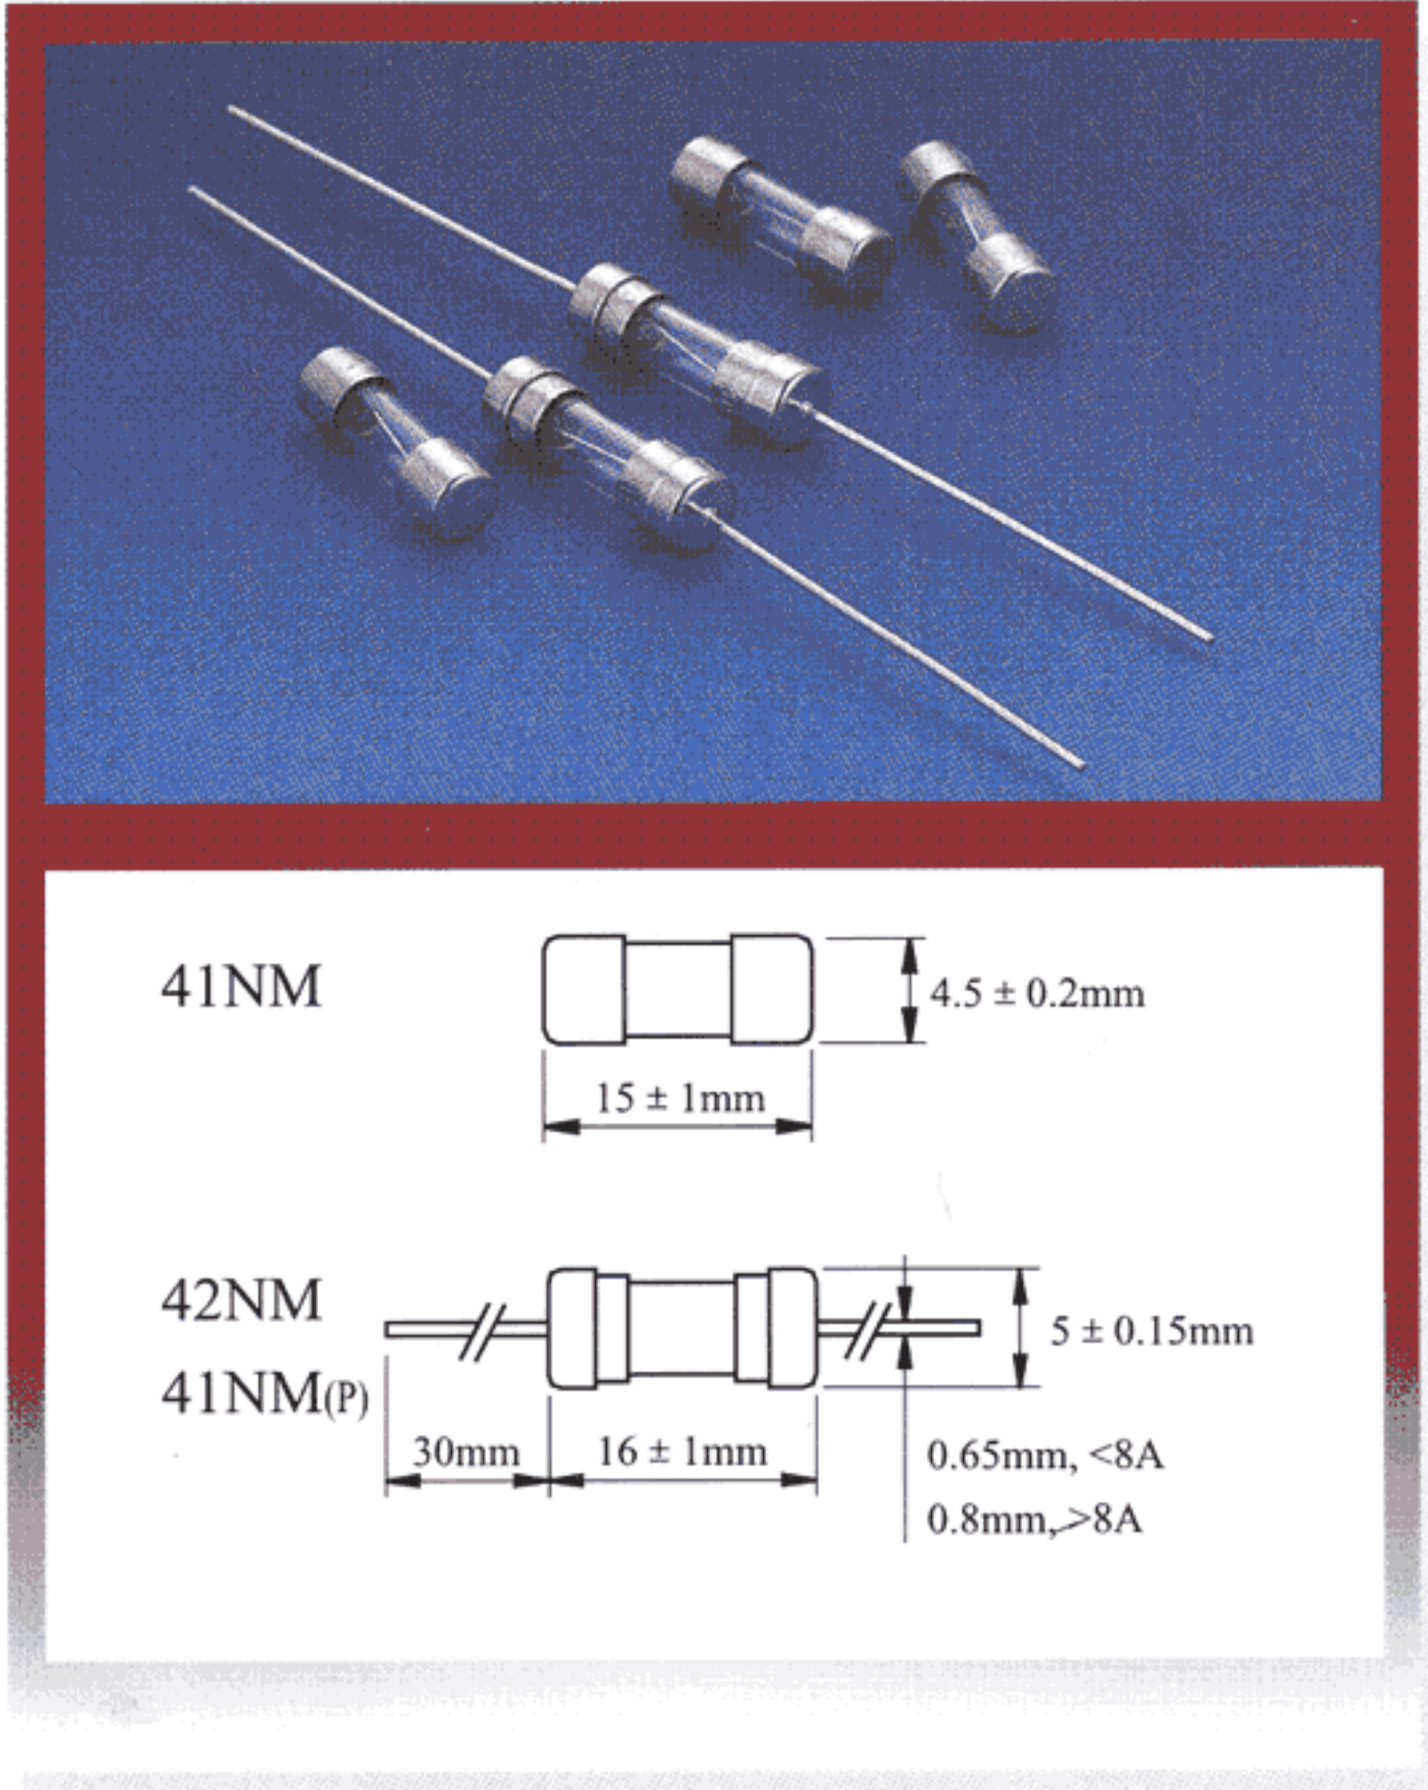

I-T CHARACTERISTICS CURVE

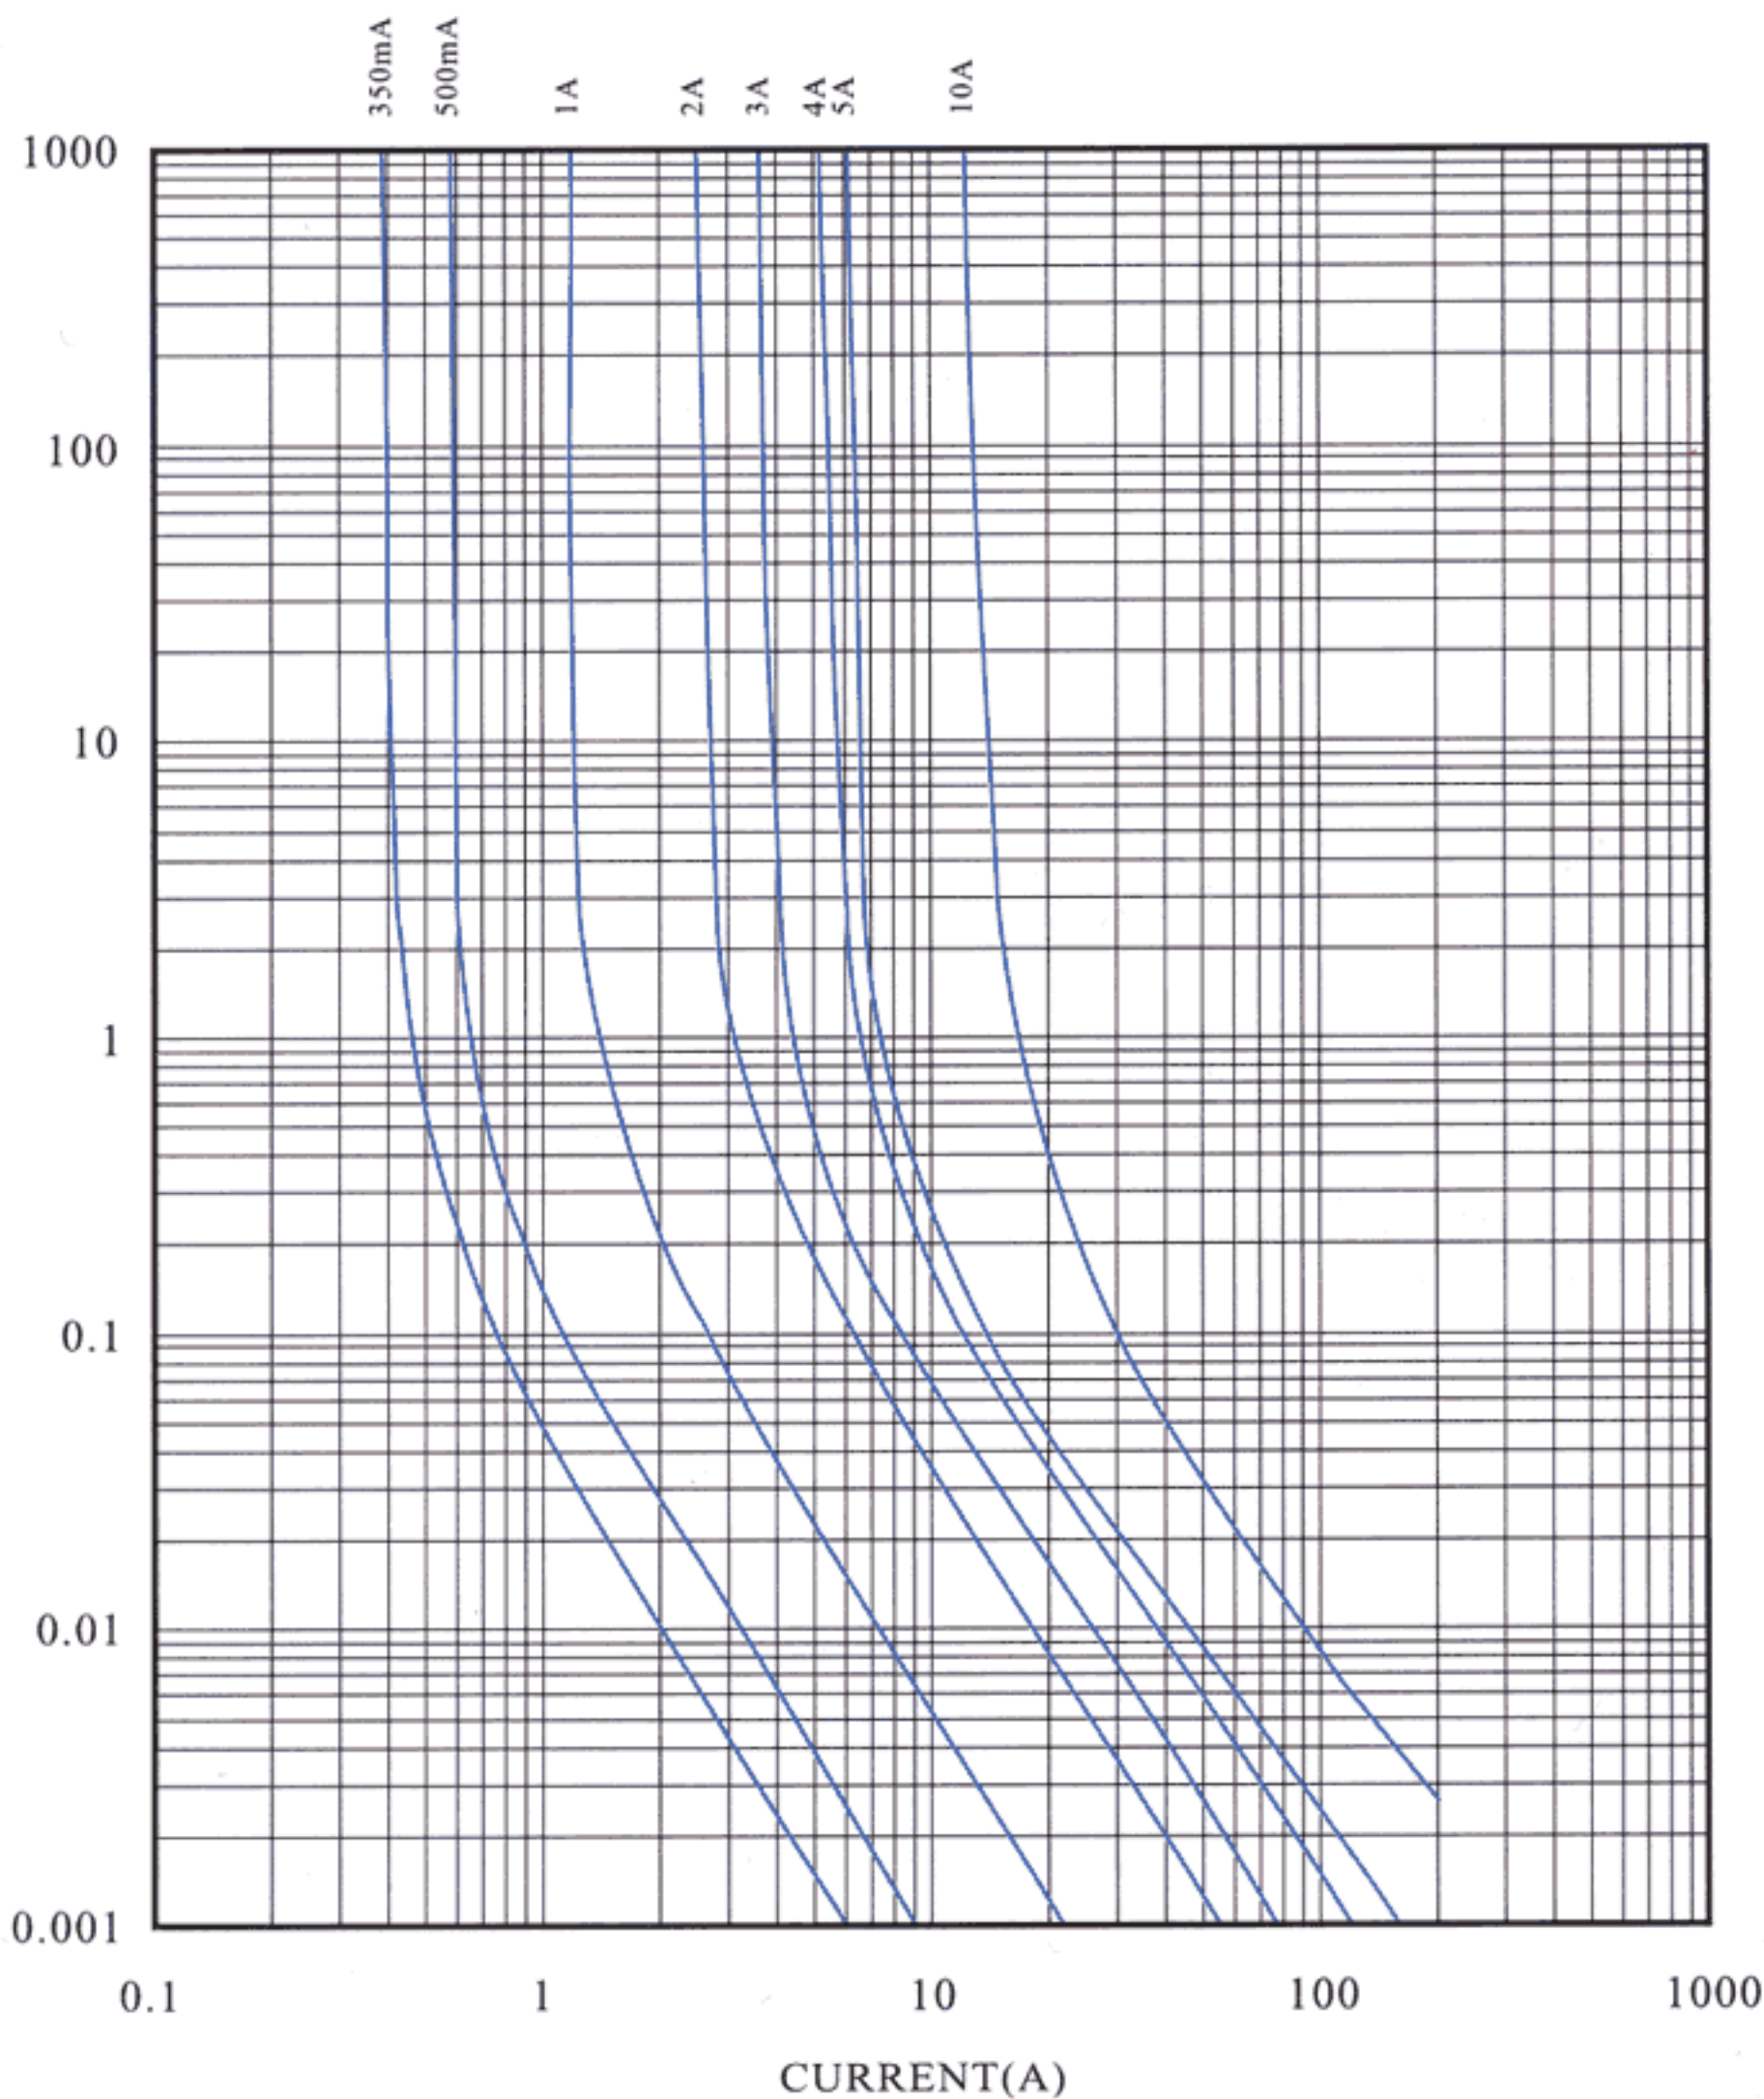

CATALOG NO.	AMPERE RATING	APPROVALS						I <sup>2</sup> T REFERENCE (A <sup>2</sup> .S)
		UR			PSE		KT	
		H <sub>1</sub>	H <sub>2</sub>	L	H <sub>2</sub>	L	H <sub>2</sub>	
0300H <sub>1</sub> /H <sub>2</sub> /L	300mA	●	●	●			●	0.025
0315H <sub>1</sub> /H <sub>2</sub> /L	315mA	●	●	●			●	0.029
0350H <sub>1</sub> /H <sub>2</sub> /L	350mA	●	●	●			●	0.036
0375H <sub>1</sub> /H <sub>2</sub> /L	375mA	●	●	●			●	0.044
0400H <sub>1</sub> /H <sub>2</sub> /L	400mA	●	●	●			●	0.056
0500H <sub>1</sub> /H <sub>2</sub> /L	500mA	●	●	●			●	0.096
0600H <sub>1</sub> /H <sub>2</sub> /L	600mA	●	●	●			●	0.18
0630H <sub>1</sub> /H <sub>2</sub> /L	630mA	●	●	●			●	0.22
0750H <sub>1</sub> /H <sub>2</sub> /L	750mA	●	●	●			●	0.29
0800H <sub>1</sub> /H <sub>2</sub> /L	800mA	●	●	●			●	0.40
010H <sub>1</sub> /H <sub>2</sub> /L	1A	●	●	●	●	●	●	0.49
012H <sub>1</sub> /H <sub>2</sub> /L	1.2A	●	●	●	●	●	●	0.84
013H <sub>1</sub> /H <sub>2</sub> /L	1.25A	●	●	●	●	●	●	1.2
015H <sub>1</sub> /H <sub>2</sub> /L	1.5A	●	●	●	●	●	●	1.8
016H <sub>1</sub> /H <sub>2</sub> /L	1.6A	●	●	●	●	●	●	2.1
020H <sub>1</sub> /H <sub>2</sub> /L	2A	●	●	●	●	●	●	3.2
023H <sub>1</sub> /H <sub>2</sub> /L	2.25A	●	●	●	●	●	●	5.2
025H <sub>1</sub> /H <sub>2</sub> /L	2.5A	●	●	●	●	●	●	6.3
030H <sub>1</sub> /H <sub>2</sub> /L	3A	●	●	●	●	●	●	7.7
032H <sub>1</sub> /H <sub>2</sub> /L	3.15A	●	●	●	●	●	●	9
035H <sub>1</sub> /H <sub>2</sub> /L	3.5A	●	●	●	●	●	●	11
040H <sub>1</sub> /H <sub>2</sub> /L	4A	●	●	●	●	●	●	14
050H <sub>1</sub> /H <sub>2</sub> /L	5A	●	●	●	●	●	●	22
060H <sub>1</sub> /H <sub>2</sub> /L	6A				●	●	●	36
063H <sub>1</sub> /H <sub>2</sub> /L	6.3A				●	●	●	39
070H <sub>1</sub> /H <sub>2</sub> /L	7A				●	●	●	50
080H <sub>1</sub> /H <sub>2</sub> /L	8A				●	●		69
090H <sub>1</sub> /H <sub>2</sub> /L	9A				●	●		88
100H <sub>1</sub> /H <sub>2</sub> /L	10A				●	●		105
120H <sub>1</sub> /H <sub>2</sub> /L	12A				●	●		161
150H <sub>1</sub> /H <sub>2</sub> /L	15A				●	●		251

H<sub>1</sub> DENOTES FOR 300V  
 H<sub>2</sub> DENOTES FOR 250V  
 L DENOTES FOR 125V  
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:  
 50 amperes at 300V AC (300mA-5A)  
 50 amperes at 250V AC (300mA-2.25A)  
 100 amperes at 250V AC (2.5A-5A)  
 100 amperes at 250V AC (1A-15A) PSE  
 500 amperes at 125V AC (1A-15A) PSE

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	5 sec Max