



41S,42S 4.5 ϕ × 15

GLASS TUBE FUSE (SLOW-BLOW)

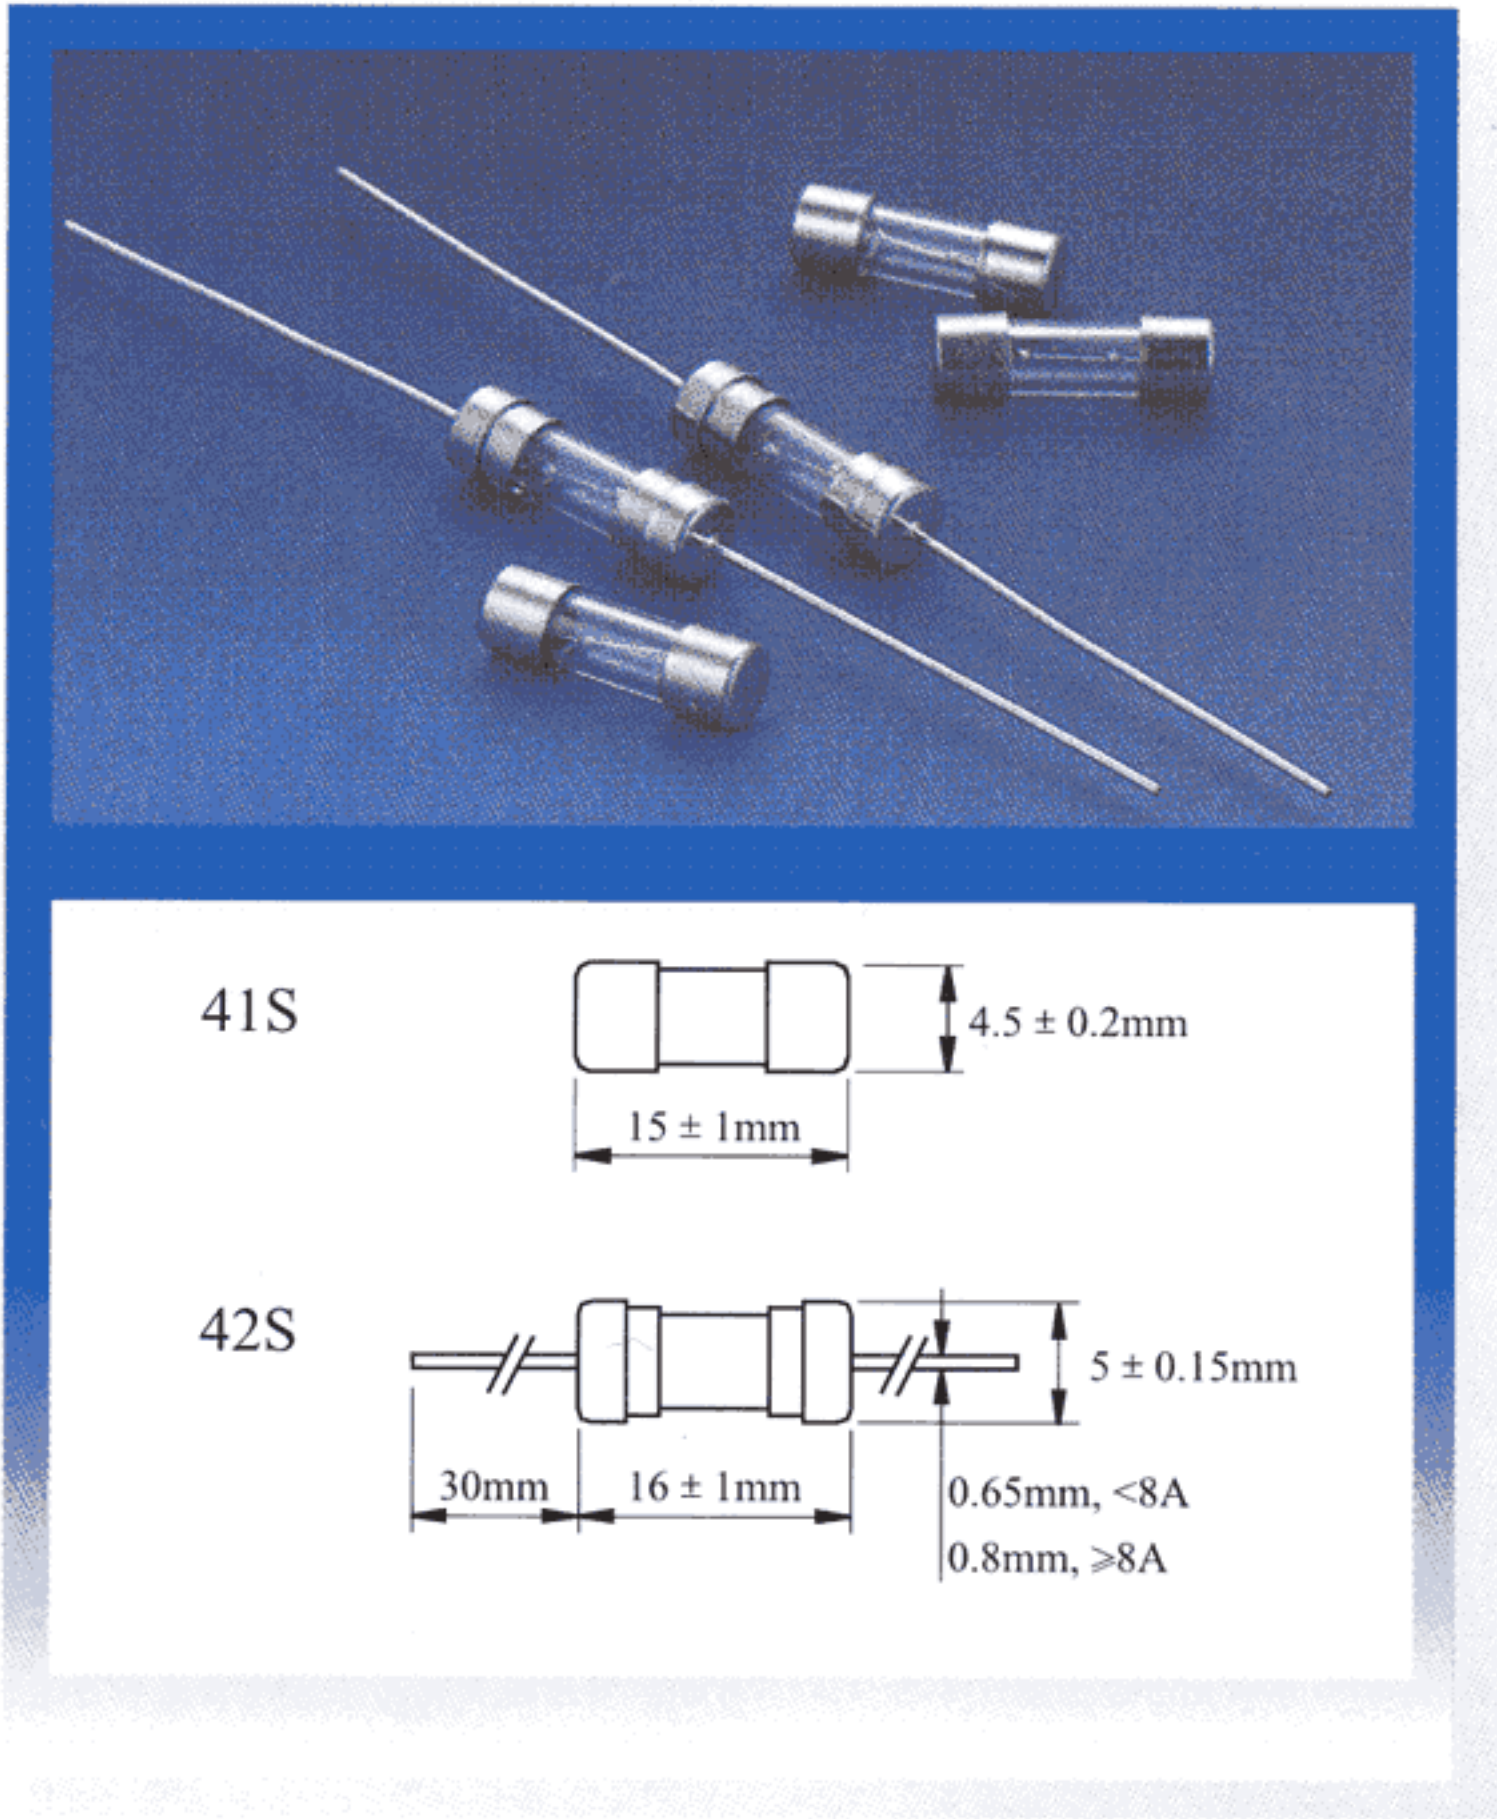

I-T CHARACTERISTICS CURVE

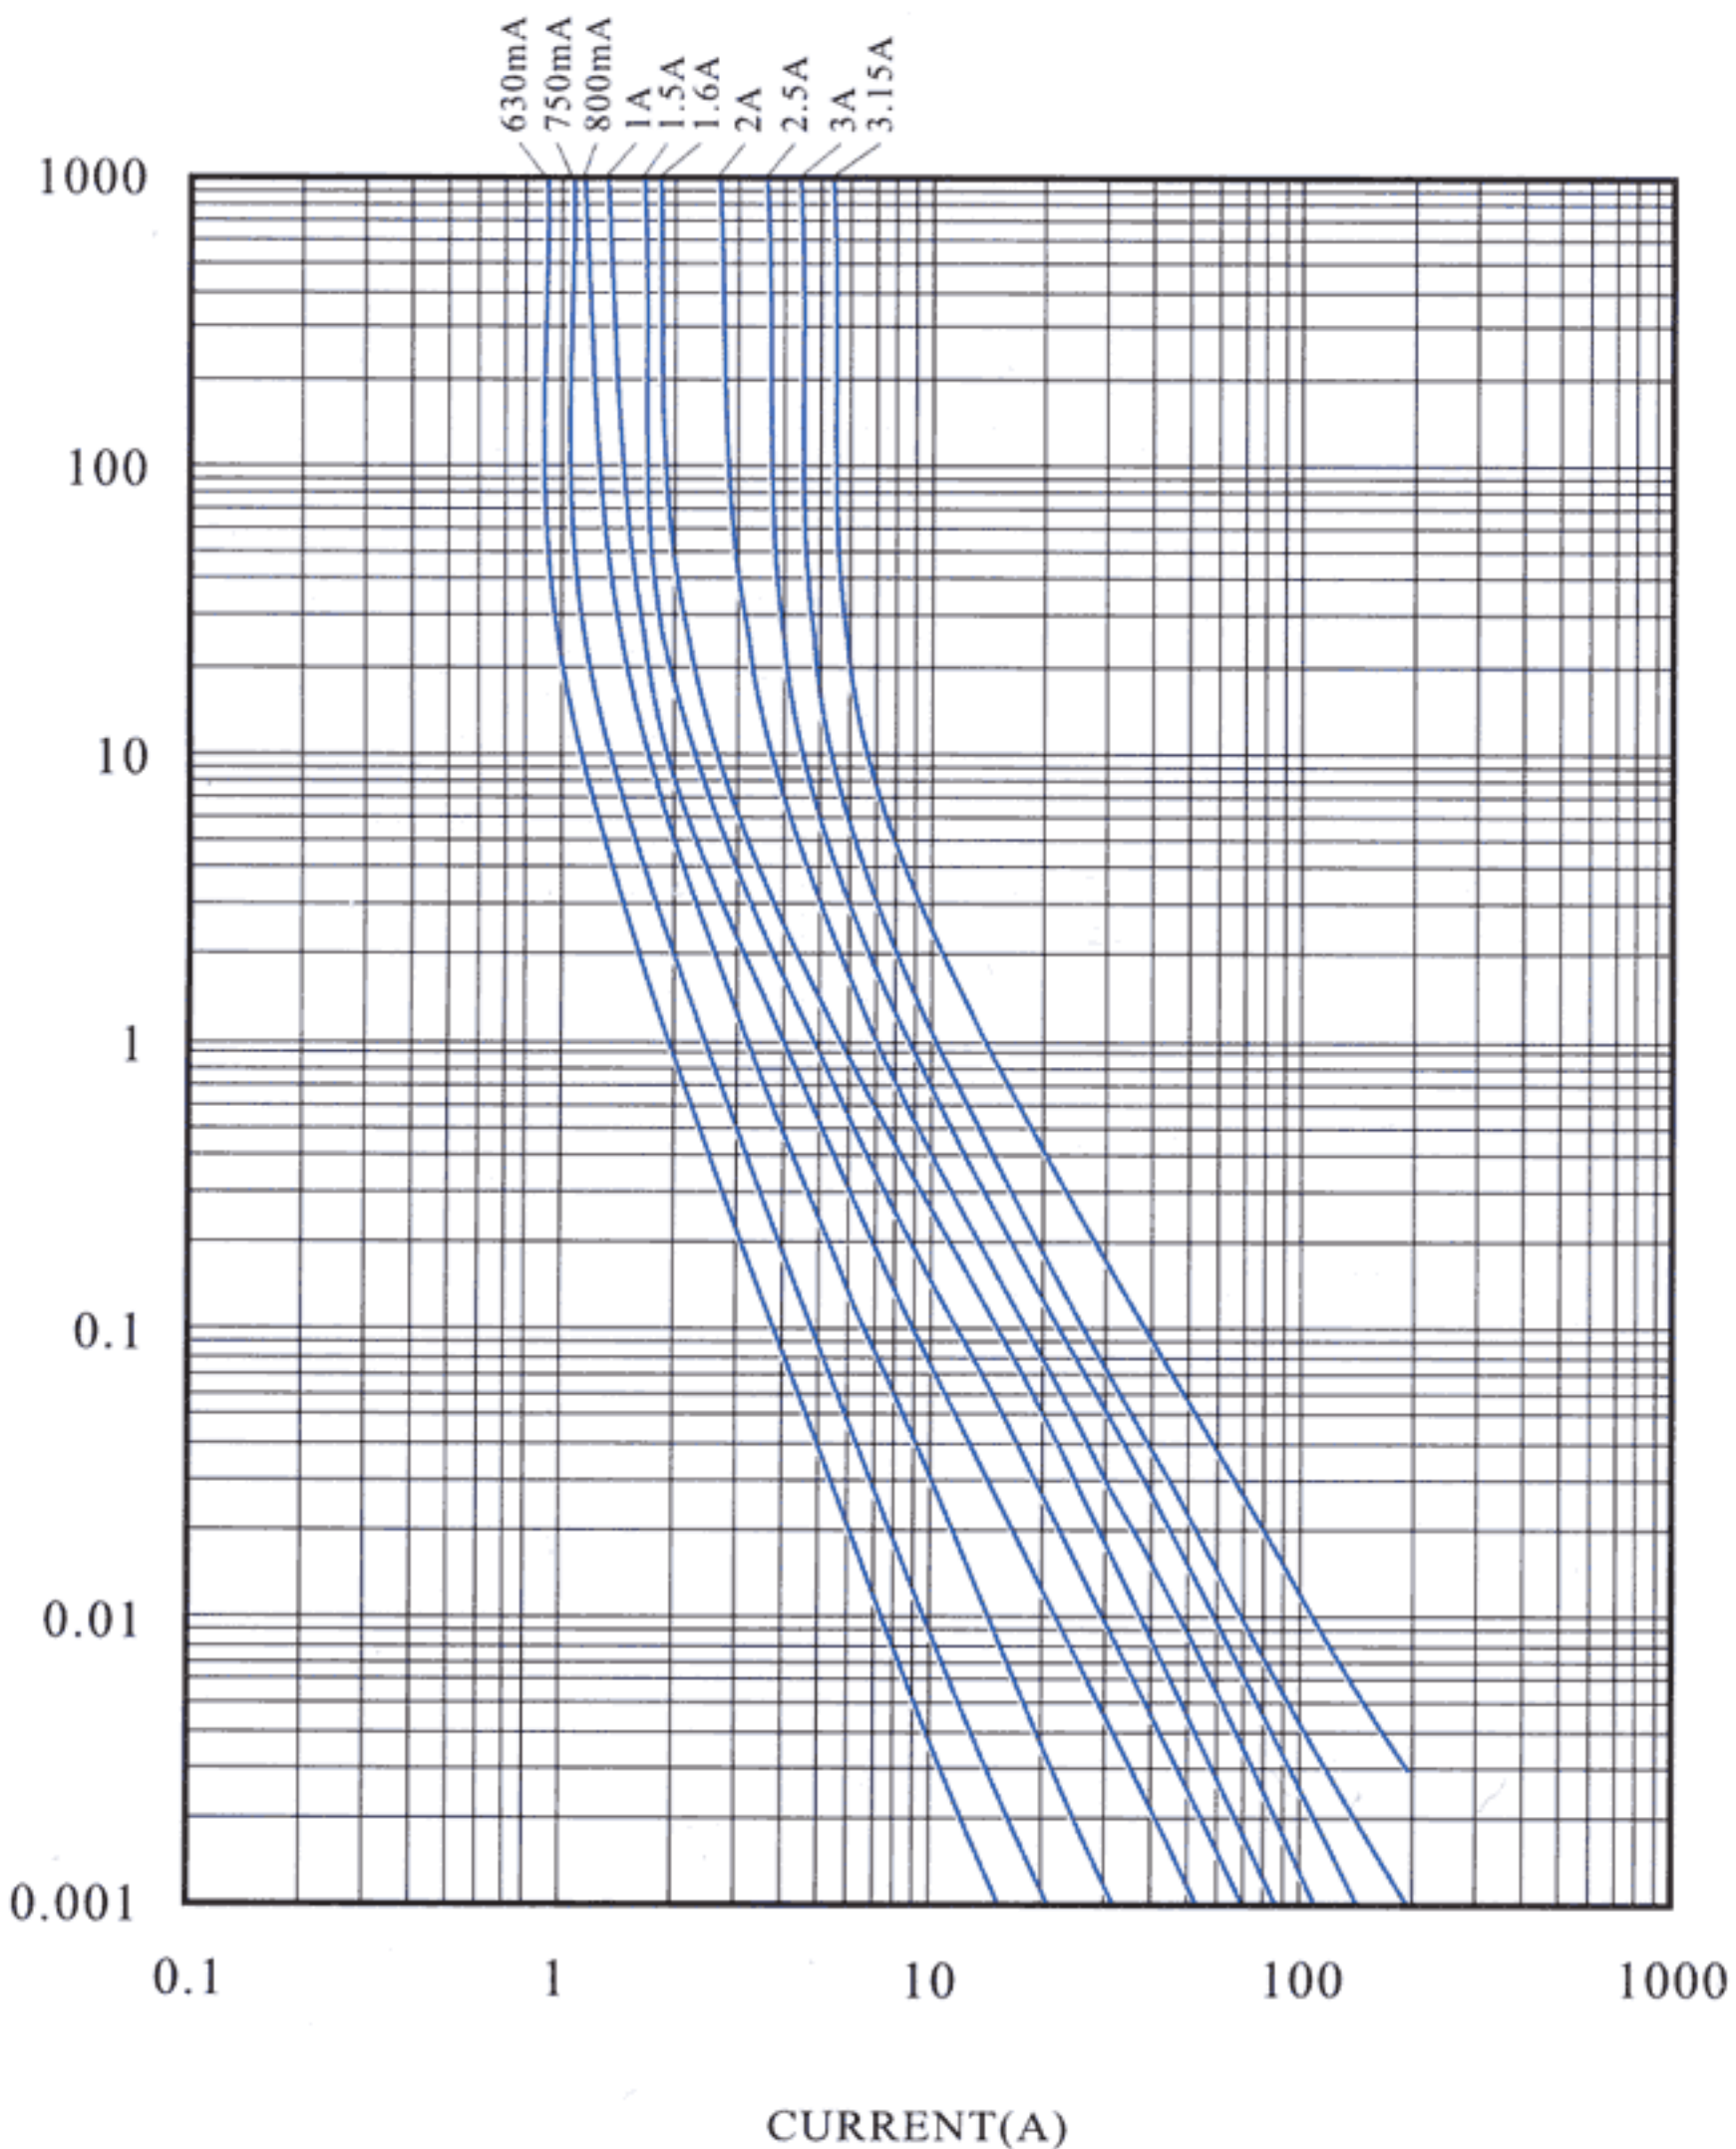

CATALOG NO.	AMPERE RATING	APPROVALS			I ² T REFERENCE (A ² .S)
		PSE		KTL	
		H	L	H	
0200H/L	200mA			●	0.207
0250H/L	250mA			●	0.224
0300H/L	300mA			●	0.328
0315H/L	315mA			●	0.419
0350H/L	350mA			●	0.497
0375H/L	375mA			●	0.59
0400H/L	400mA			●	0.79
0500H/L	500mA			●	1.17
0600H/L	600mA			●	1.81
0630H/L	630mA			●	2.13
0750H/L	750mA			●	2.96
0800H/L	800mA			●	3.47
010H/L	1A	●	●	●	5.66
012H/L	1.2A	●	●	●	8.15
013H/L	1.25A	●	●	●	9.83
015H/L	1.5A	●	●	●	16.5
016H/L	1.6A	●	●	●	22.7
020H/L	2A	●	●	●	32
025H/L	2.5A	●	●	●	50
030H/L	3A	●	●	●	79
032H/L	3.15A	●	●	●	90.6
035H/L	3.5A	●	●	●	117
040H/L	4A	●	●	●	149
050H/L	5A	●	●	●	273
060H/L	6A	●	●	●	395
063H/L	6.3A	●	●	●	410
070H/L	7A	●	●	●	466
080H/L	8A	●	●	●	597
090H/L	9A	●	●	●	
100H/L	10A	●	●	●	

H DENOTES FOR 250V
 L DENOTES FOR 125V
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:
 500 amperes at 125V AC (1A-15A) PSE
 100 amperes at 250V AC (1A-15A) PSE

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	120 sec Max