


50T 5.2 ϕ × 20

低分断能力玻璃保险丝管(延时型)

LOW-BREAKING CAPACITY GLASS TUBE FUSE(TIME-LAG)

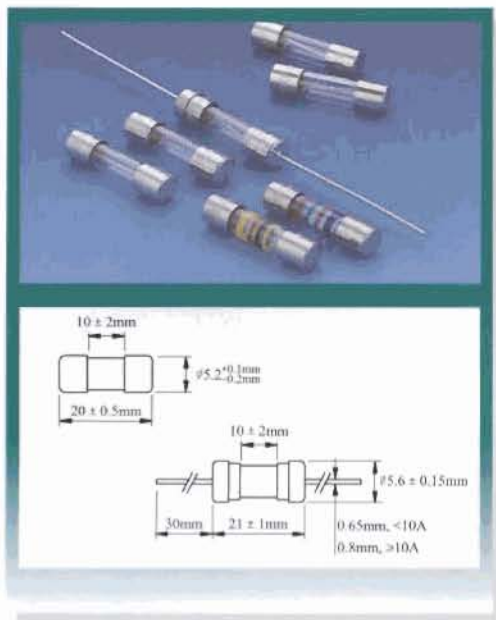


目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS								I ² T 参考值 REFERENCE (A ² S)
			CCC	BSMI	VDE	IEC	IMQ	UR	CSA	KT	
0100H	100mA	2500	●								0.014
0125H	125mA	2000	●	●	●	●	●	●	●	●	0.039
0160H	160mA	1900	●	●	●	●	●	●	●	●	0.054
0200H	200mA	1500	●	●	●	●	●	●	●	●	0.087
0250H	250mA	1300	●	●	●	●	●	●	●	●	0.15
0315H	315mA	1100	●	●	●	●	●	●	●	●	0.35
0400H	400mA	1000	●	●	●	●	●	●	●	●	0.59
0500H	500mA	900	●	●	●	●	●	●	●	●	0.65
0630H	630mA	300	●	●	●	●	●	●	●	●	1.4
0800H	800mA	250	●	●	●	●	●	●	●	●	3.2
010H	1A	150	●	●	●	●	●	●	●	●	4.6
013H	1.25A	150	●	●	●	●	●	●	●	●	5.0
016H	1.6A	150	●	●	●	●	●	●	●	●	10
020H	2A	150	●	●	●	●	●	●	●	●	21
025H	2.5A	120	●	●	●	●	●	●	●	●	38
032H	3.15A	100	●	●	●	●	●	●	●	●	54
040H	4A	100	●	●	●	●	●	●	●	●	80
050H	5A	100	●	●	●	●	●	●	●	●	135
063H	6.3A	100	●	●	●	●	●	●	●	●	192
080H	8A	100	●	●	●	●	●	●	●	●	300
100H	10A	100	●	●	●	●	●	●	●	●	460
120H	12A	100	●	●	●	●	●	●	●	●	650
150H	15A	100	●	●	●	●	●	●	●	●	1015

H DENOTES FOR 250V (H表示 250V)

● DENOTES FOR APPROVED (●表示已取得认证)

I-T CHARACTERISTICS CURVE
电流-时间曲线图

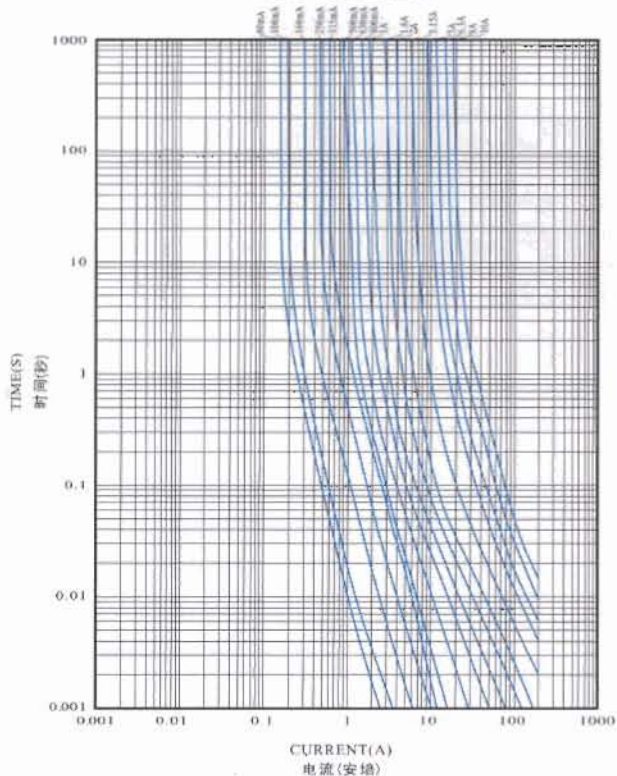

分断电流:

BREAKING CAPACITY:

35A OR 10I_n WHICHEVER IS GREATER

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME		
		32-100mA	125mA-6.3A	8A-15A
2.1In	Max (最慢)	2min	2min	30min
	Min (最快)	200ms	600ms	600ms
2.75In	Max (最慢)	10sec	10sec	10sec
	Min (最快)	40ms	150ms	150ms
4In	Max (最慢)	3sec	3sec	3sec
	Min (最快)	10ms	20ms	20ms
10In	Max (最慢)	300ms	300ms	300ms