



51MS,52MS 5.2 ϕ × 20

GLASS TUBE FUSE (MEDIUM SLOW-BLOW)

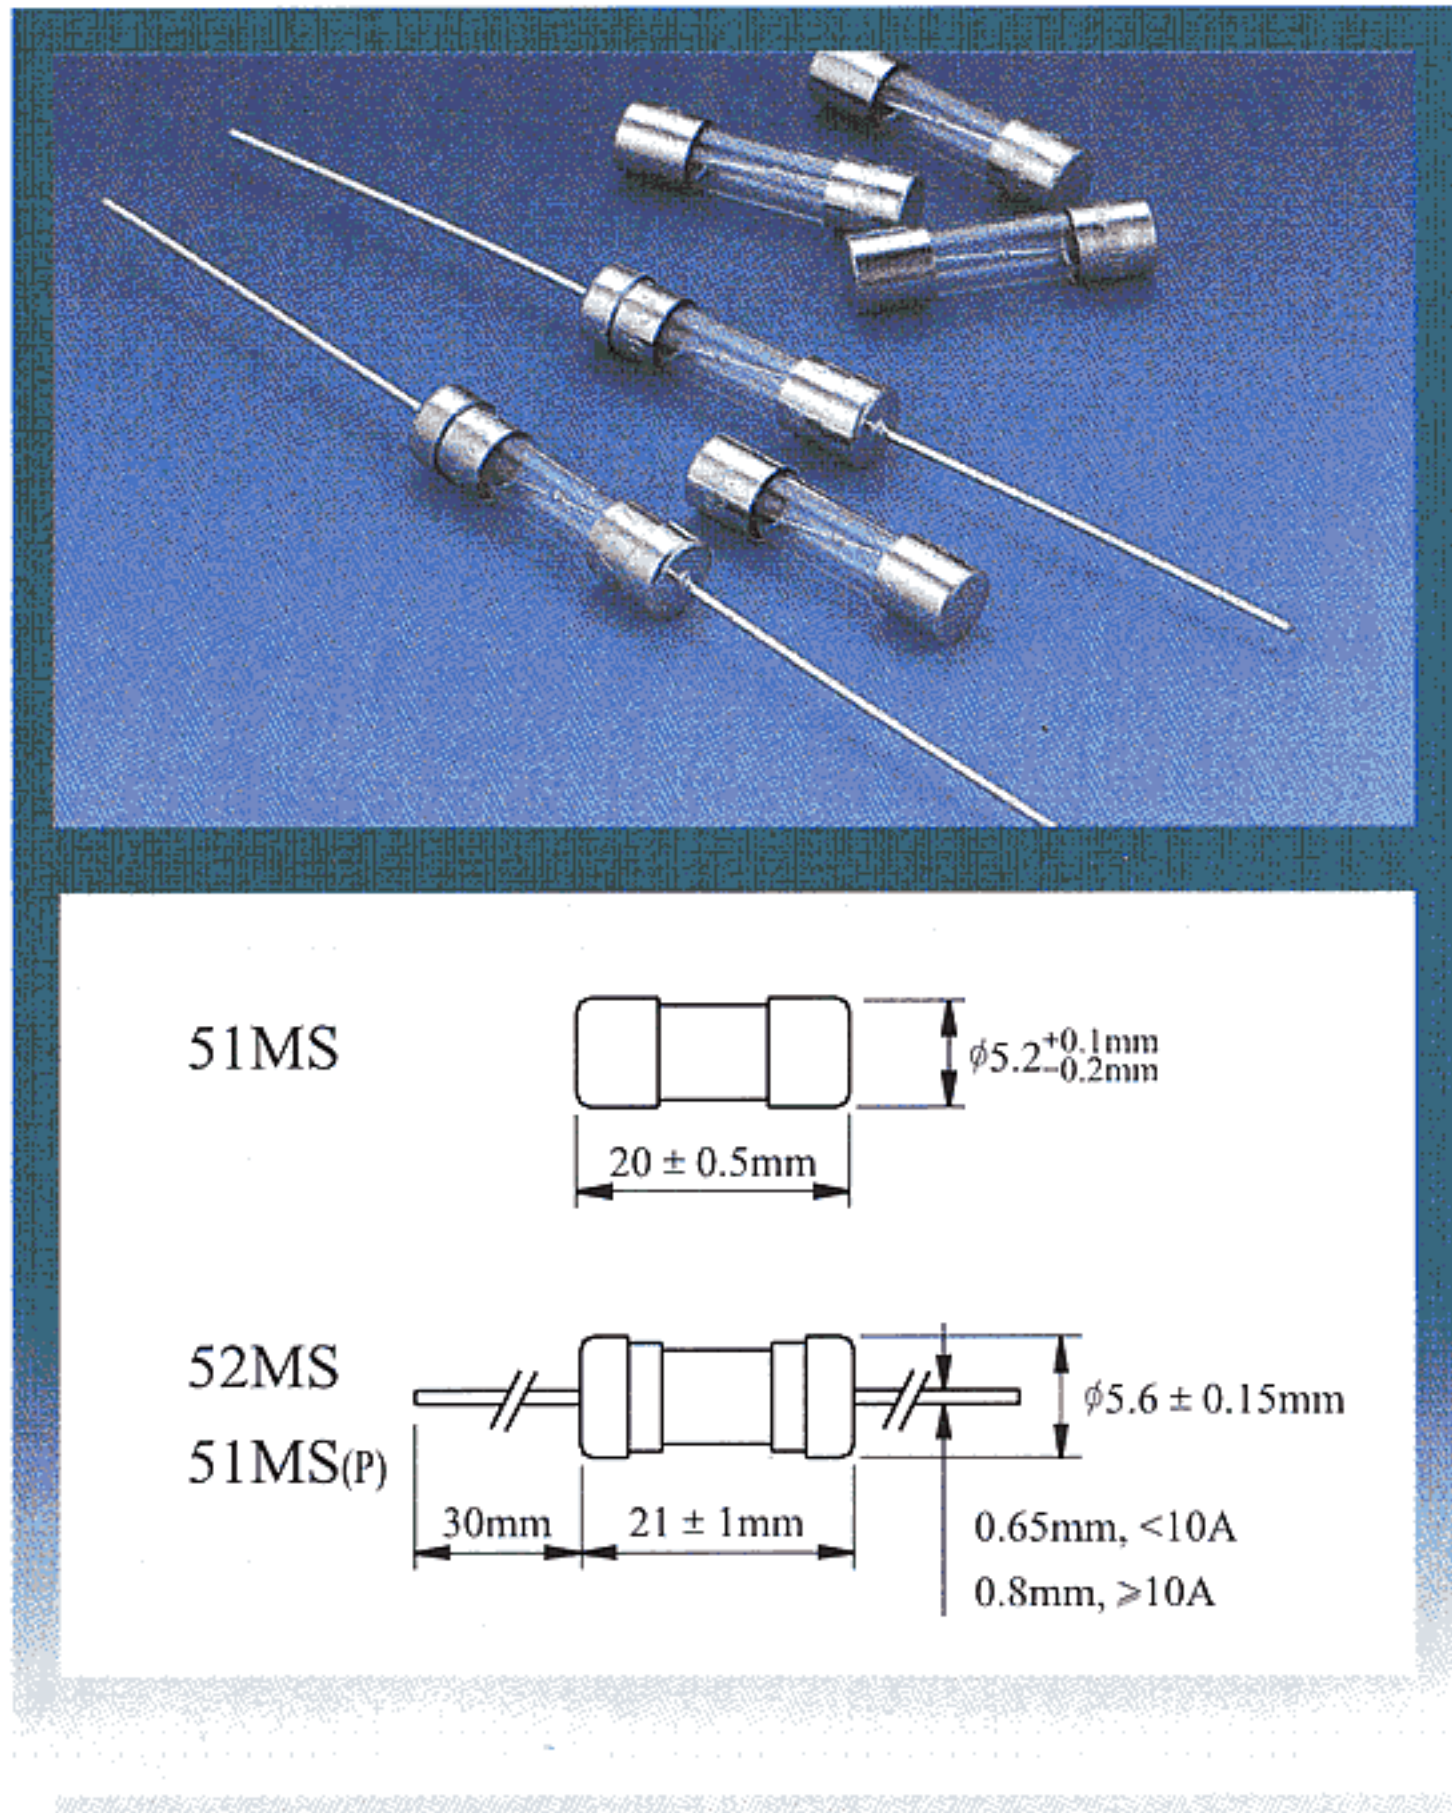

I-T CHARACTERISTICS CURVE

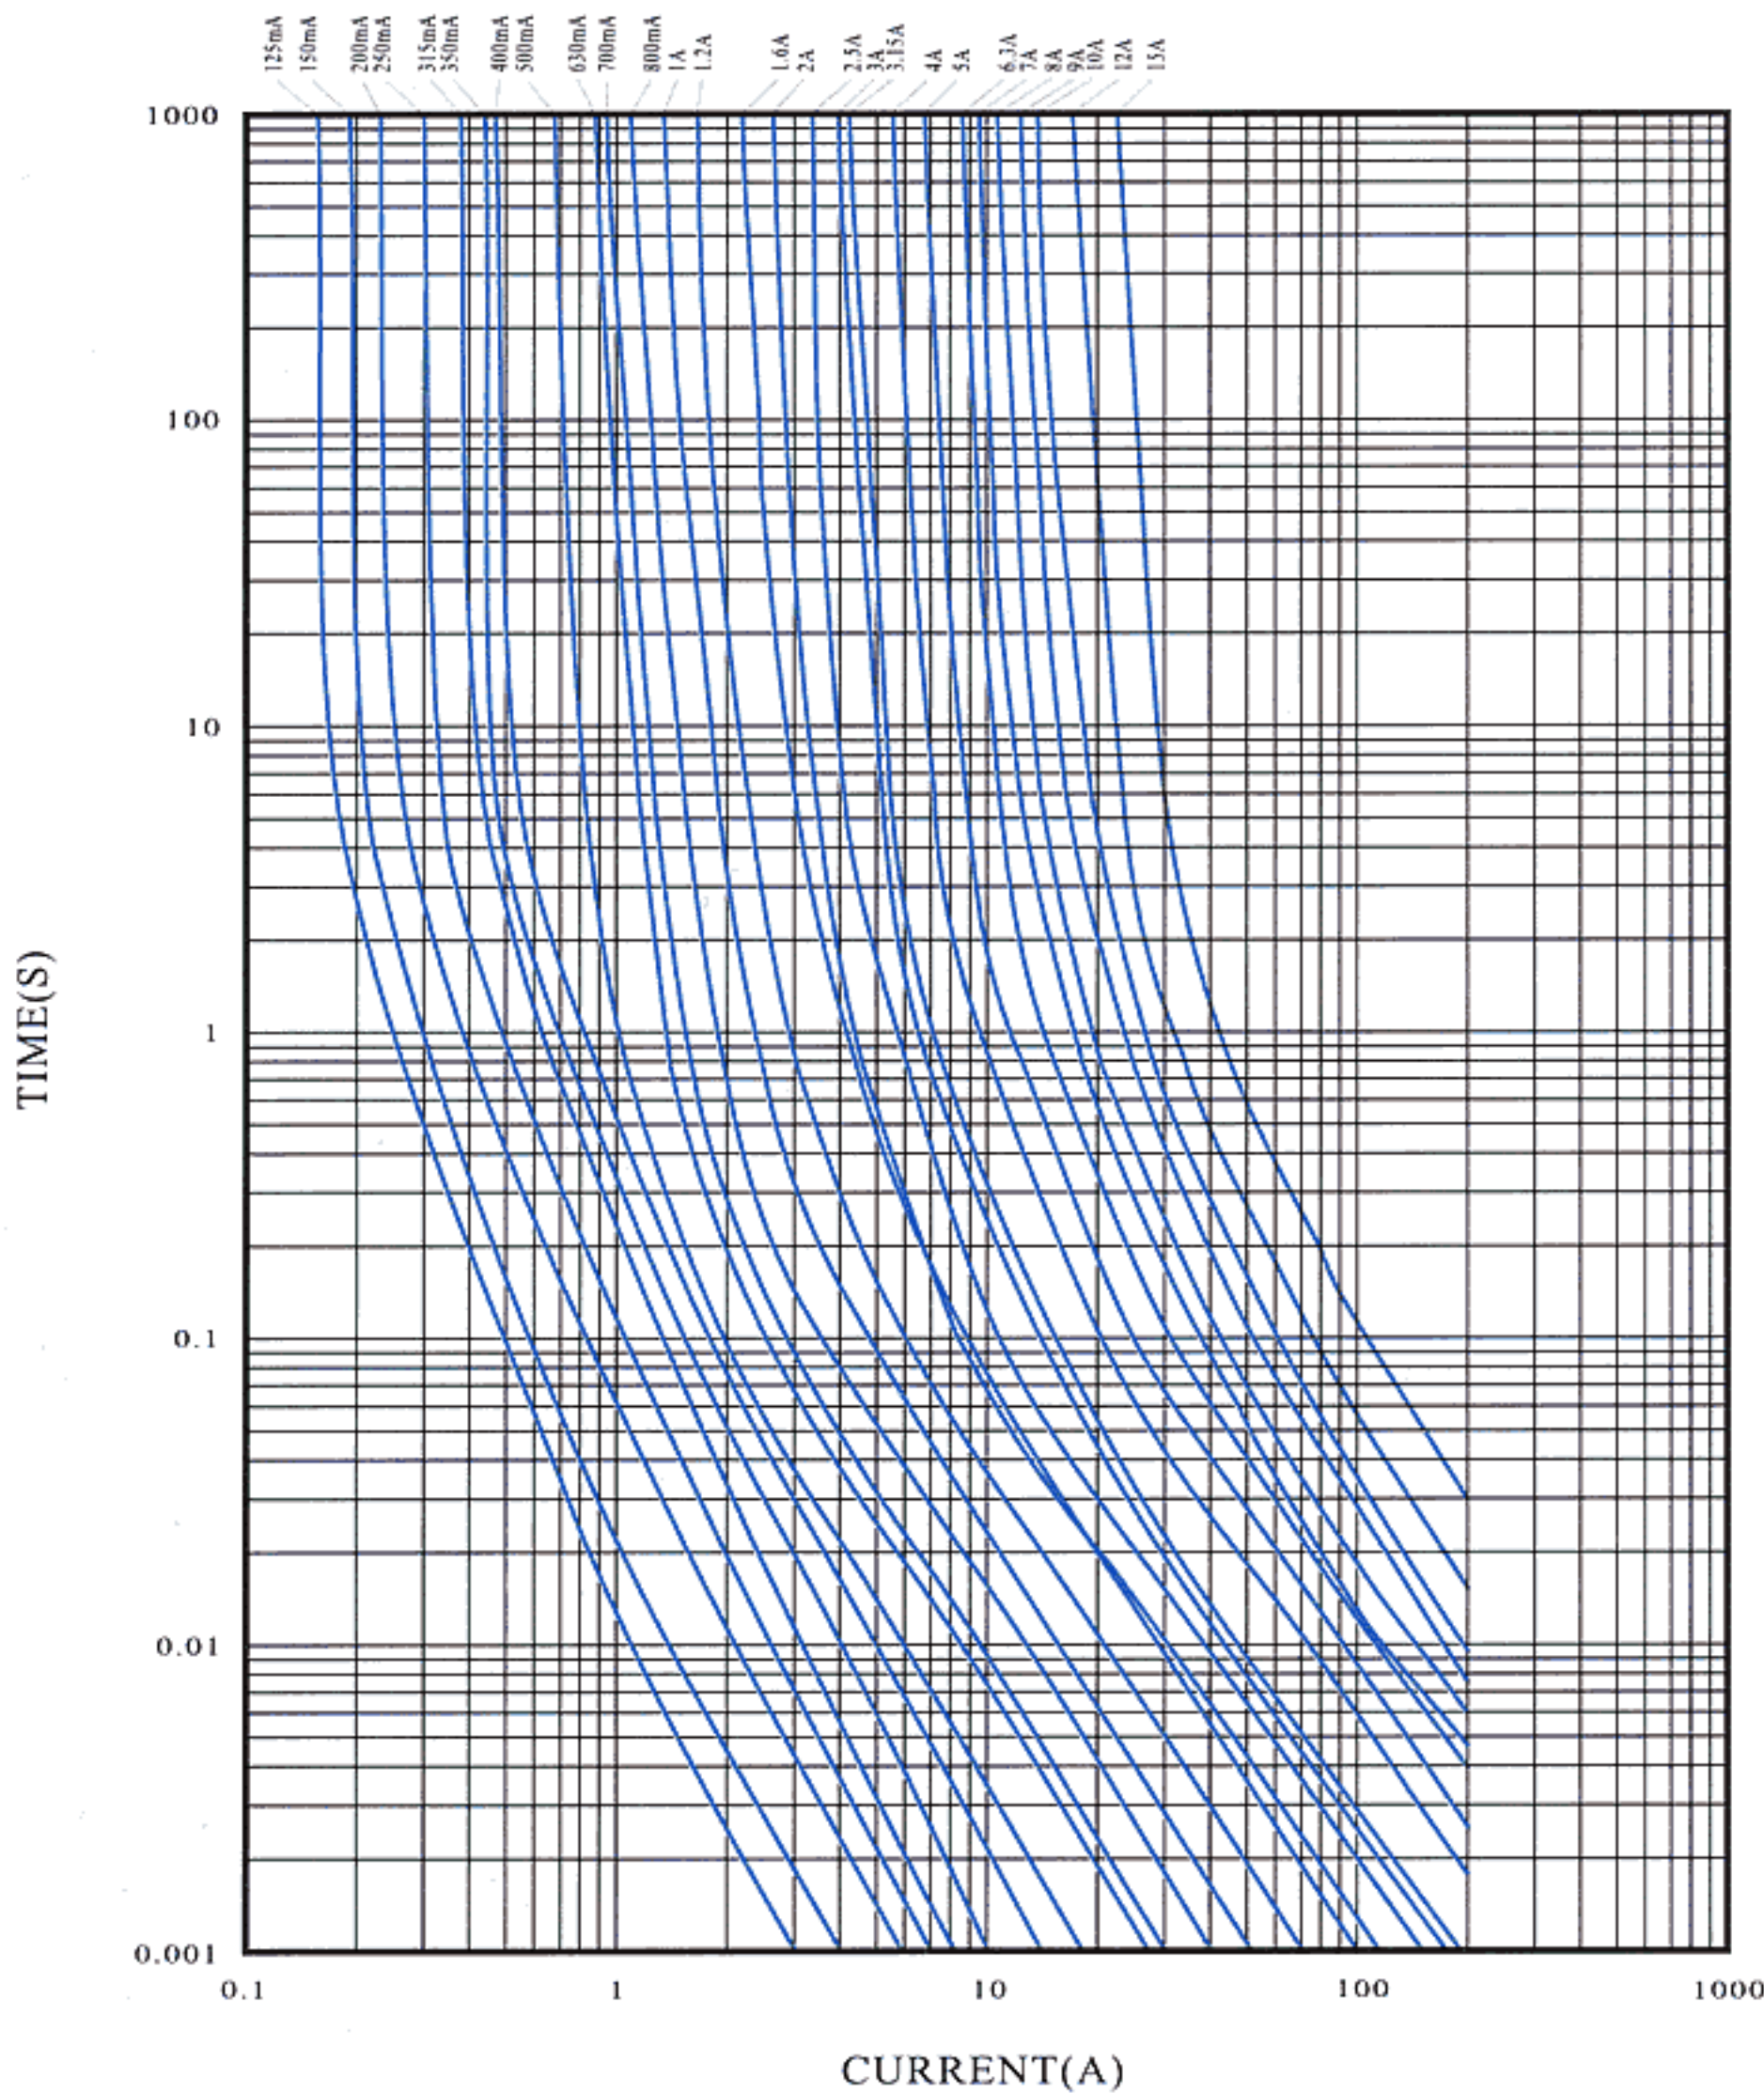

CATALOG NO.	AMPERE RATING	APPROVALS										I ² T REFERENCE (A ² .S)
		UL		UR		CSA		PSE		KTL		
		H	L	H	L	H	L	H	L	H		
0100H/L	100mA	●	●			●	●			●		0.0086
0125H/L	125mA	●	●			●	●			●		0.012
0150H/L	150mA	●	●			●	●			●		0.018
0160H/L	160mA	●	●			●	●			●		0.020
0200H/L	200mA	●	●			●	●			●		0.040
0250H/L	250mA	●	●			●	●			●		0.063
0300H/L	300mA	●	●			●	●			●		0.084
0315H/L	315mA	●	●			●	●			●		0.086
0350H/L	350mA	●	●			●	●			●		0.16
0375H/L	375mA	●	●			●	●			●		0.22
0400H/L	400mA	●	●			●	●			●		0.24
0500H/L	500mA	●	●			●	●			●		0.35
0600H/L	600mA	●	●			●	●			●		0.62
0630H/L	630mA	●	●			●	●			●		0.71
0700H/L	700mA	●	●			●	●			●		1.0
0750H/L	750mA	●	●			●	●			●		1.1
0800H/L	800mA	●	●			●	●			●		1.4
010H/L	1A	●	●			●	●	●	●	●		2.0
012H/L	1.2A	●	●			●	●	●	●	●		4.6
013H/L	1.25A	●	●			●	●	●	●	●		5.1
015H/L	1.5A	●	●			●	●	●	●	●		7.8
016H/L	1.6A	●	●			●	●	●	●	●		7.9
020H/L	2A		●	●		●	●	●	●	●		8.9
023H/L	2.25A		●	●		●	●	●	●	●		12
025H/L	2.5A		●	●		●	●	●	●	●		14
030H/L	3A		●	●		●	●	●	●	●		18
032H/L	3.15A		●	●		●	●	●	●	●		22
035H/L	3.5A		●	●		●	●	●	●	●		29
040H/L	4A		●	●		●	●	●	●	●		58
050H/L	5A		●	●		●	●	●	●	●		104
060H/L	6A		●	●		●	●	●	●	●		110
063H/L	6.3A		●	●		●	●	●	●	●		113
070H/L	7A		●	●		●	●	●	●	●		116
080H/L	8A		●	●		●	●	●	●	●		150
090H/L	9A							●	●	●		205
100H/L	10A	●	●			●	●	●	●	●		336
120H/L	12A							●	●	●		484
150H/L	15A							●	●	●		756

H DENOTES FOR 250V

L DENOTES FOR 125V

● DENOTES FOR APPROVED

REMARK:52MS100H WITHOUT UL APPROVAL

INTERRUPTING RATING:

10,000 amperes at 125V AC (100mA-8A)

35 amperes at 250V AC (100mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-8A)

500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (100mA-15A) PSE, KTL

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	20 sec Max