



51ST,52ST 5.2 $\phi$  × 20

GLASS TUBE FUSE (MEDIUM SLOW-BLOW)

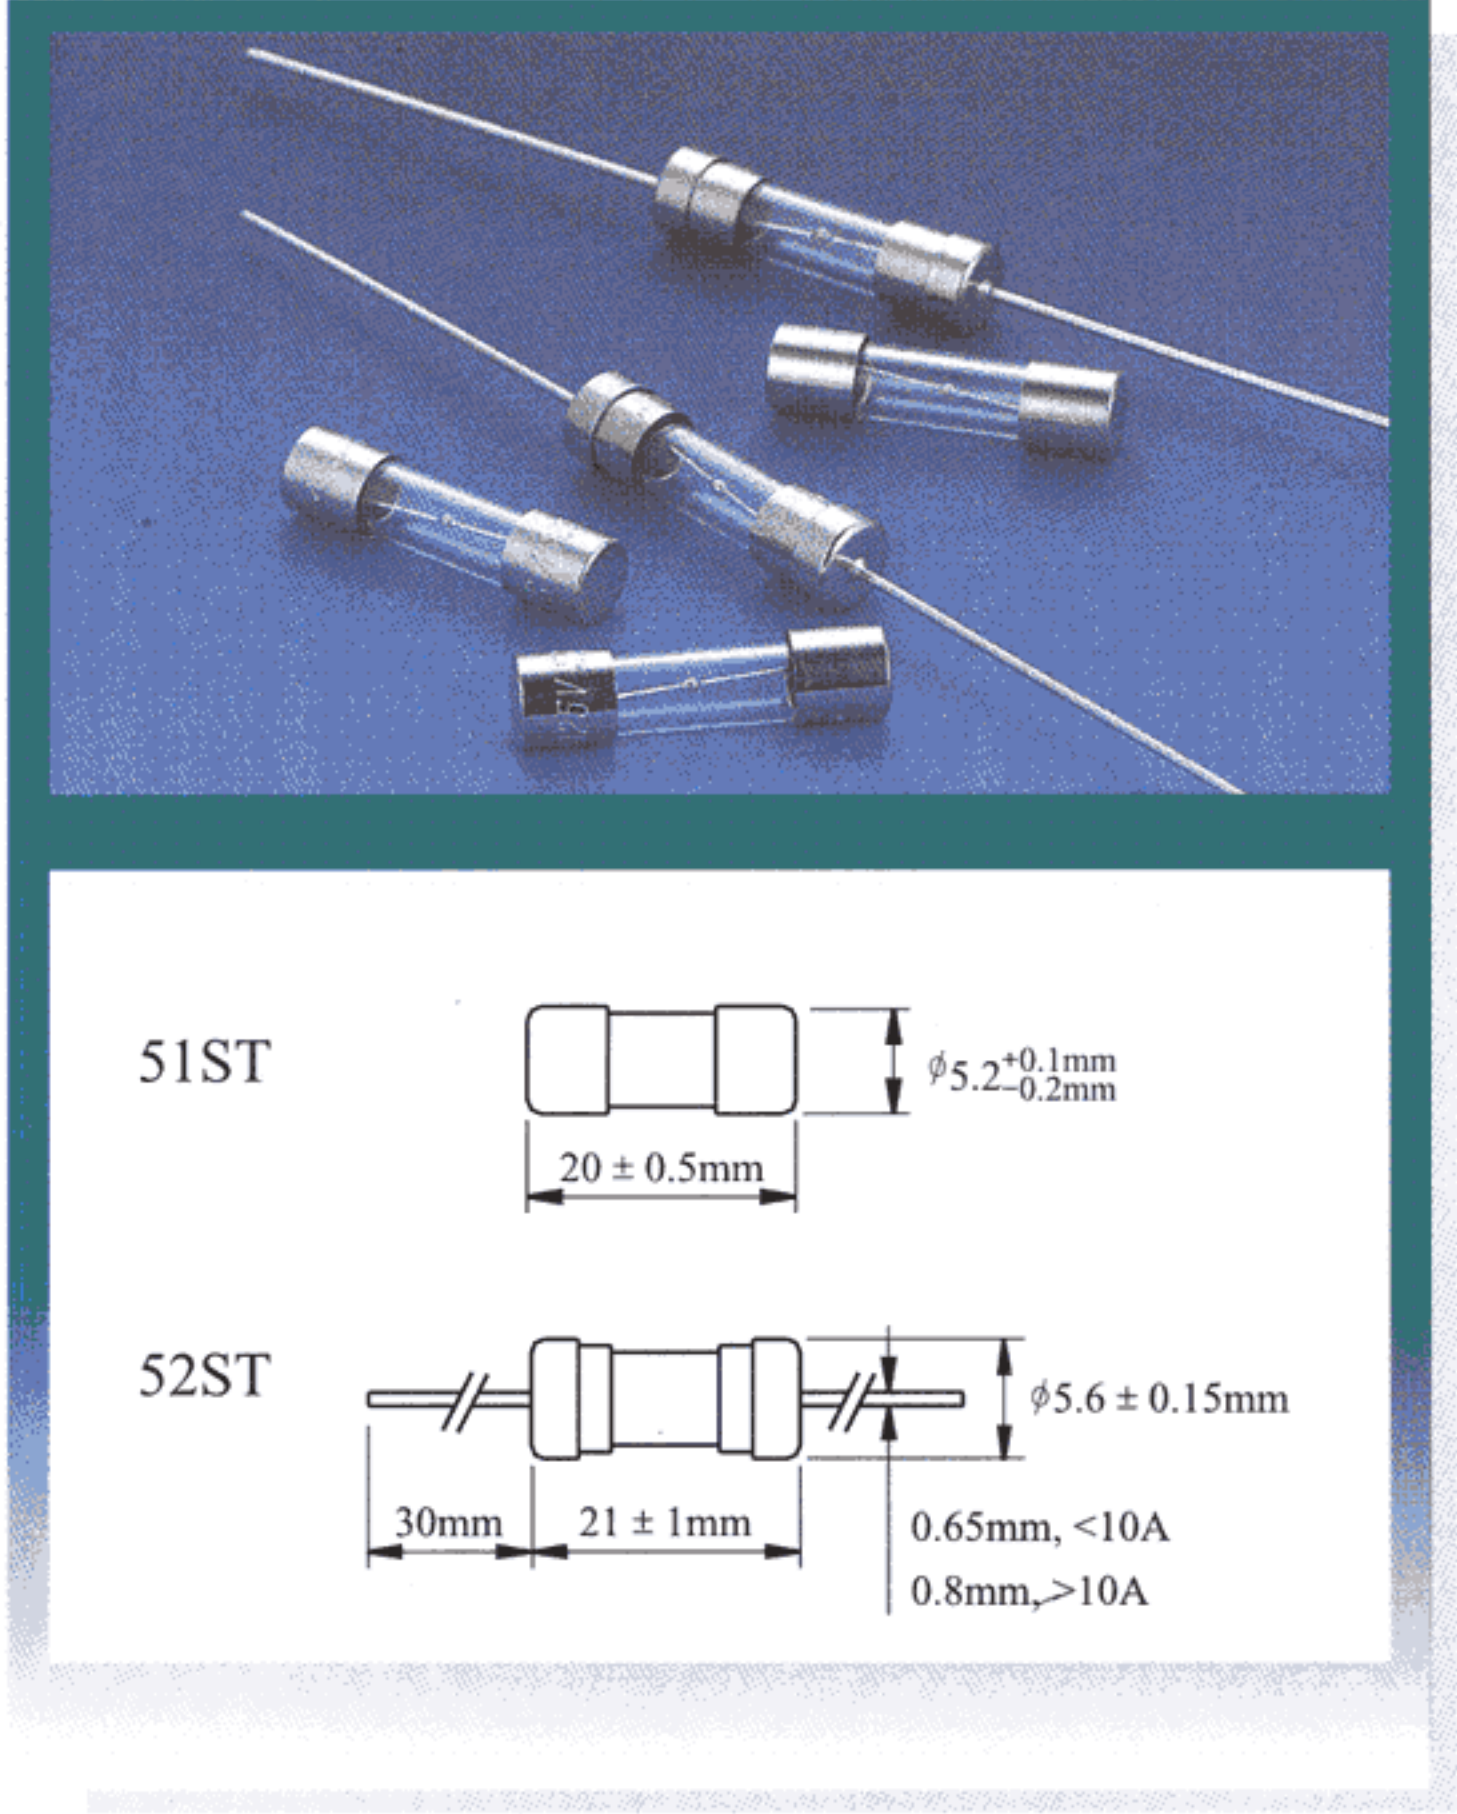

I-T CHARACTERISTICS CURVE

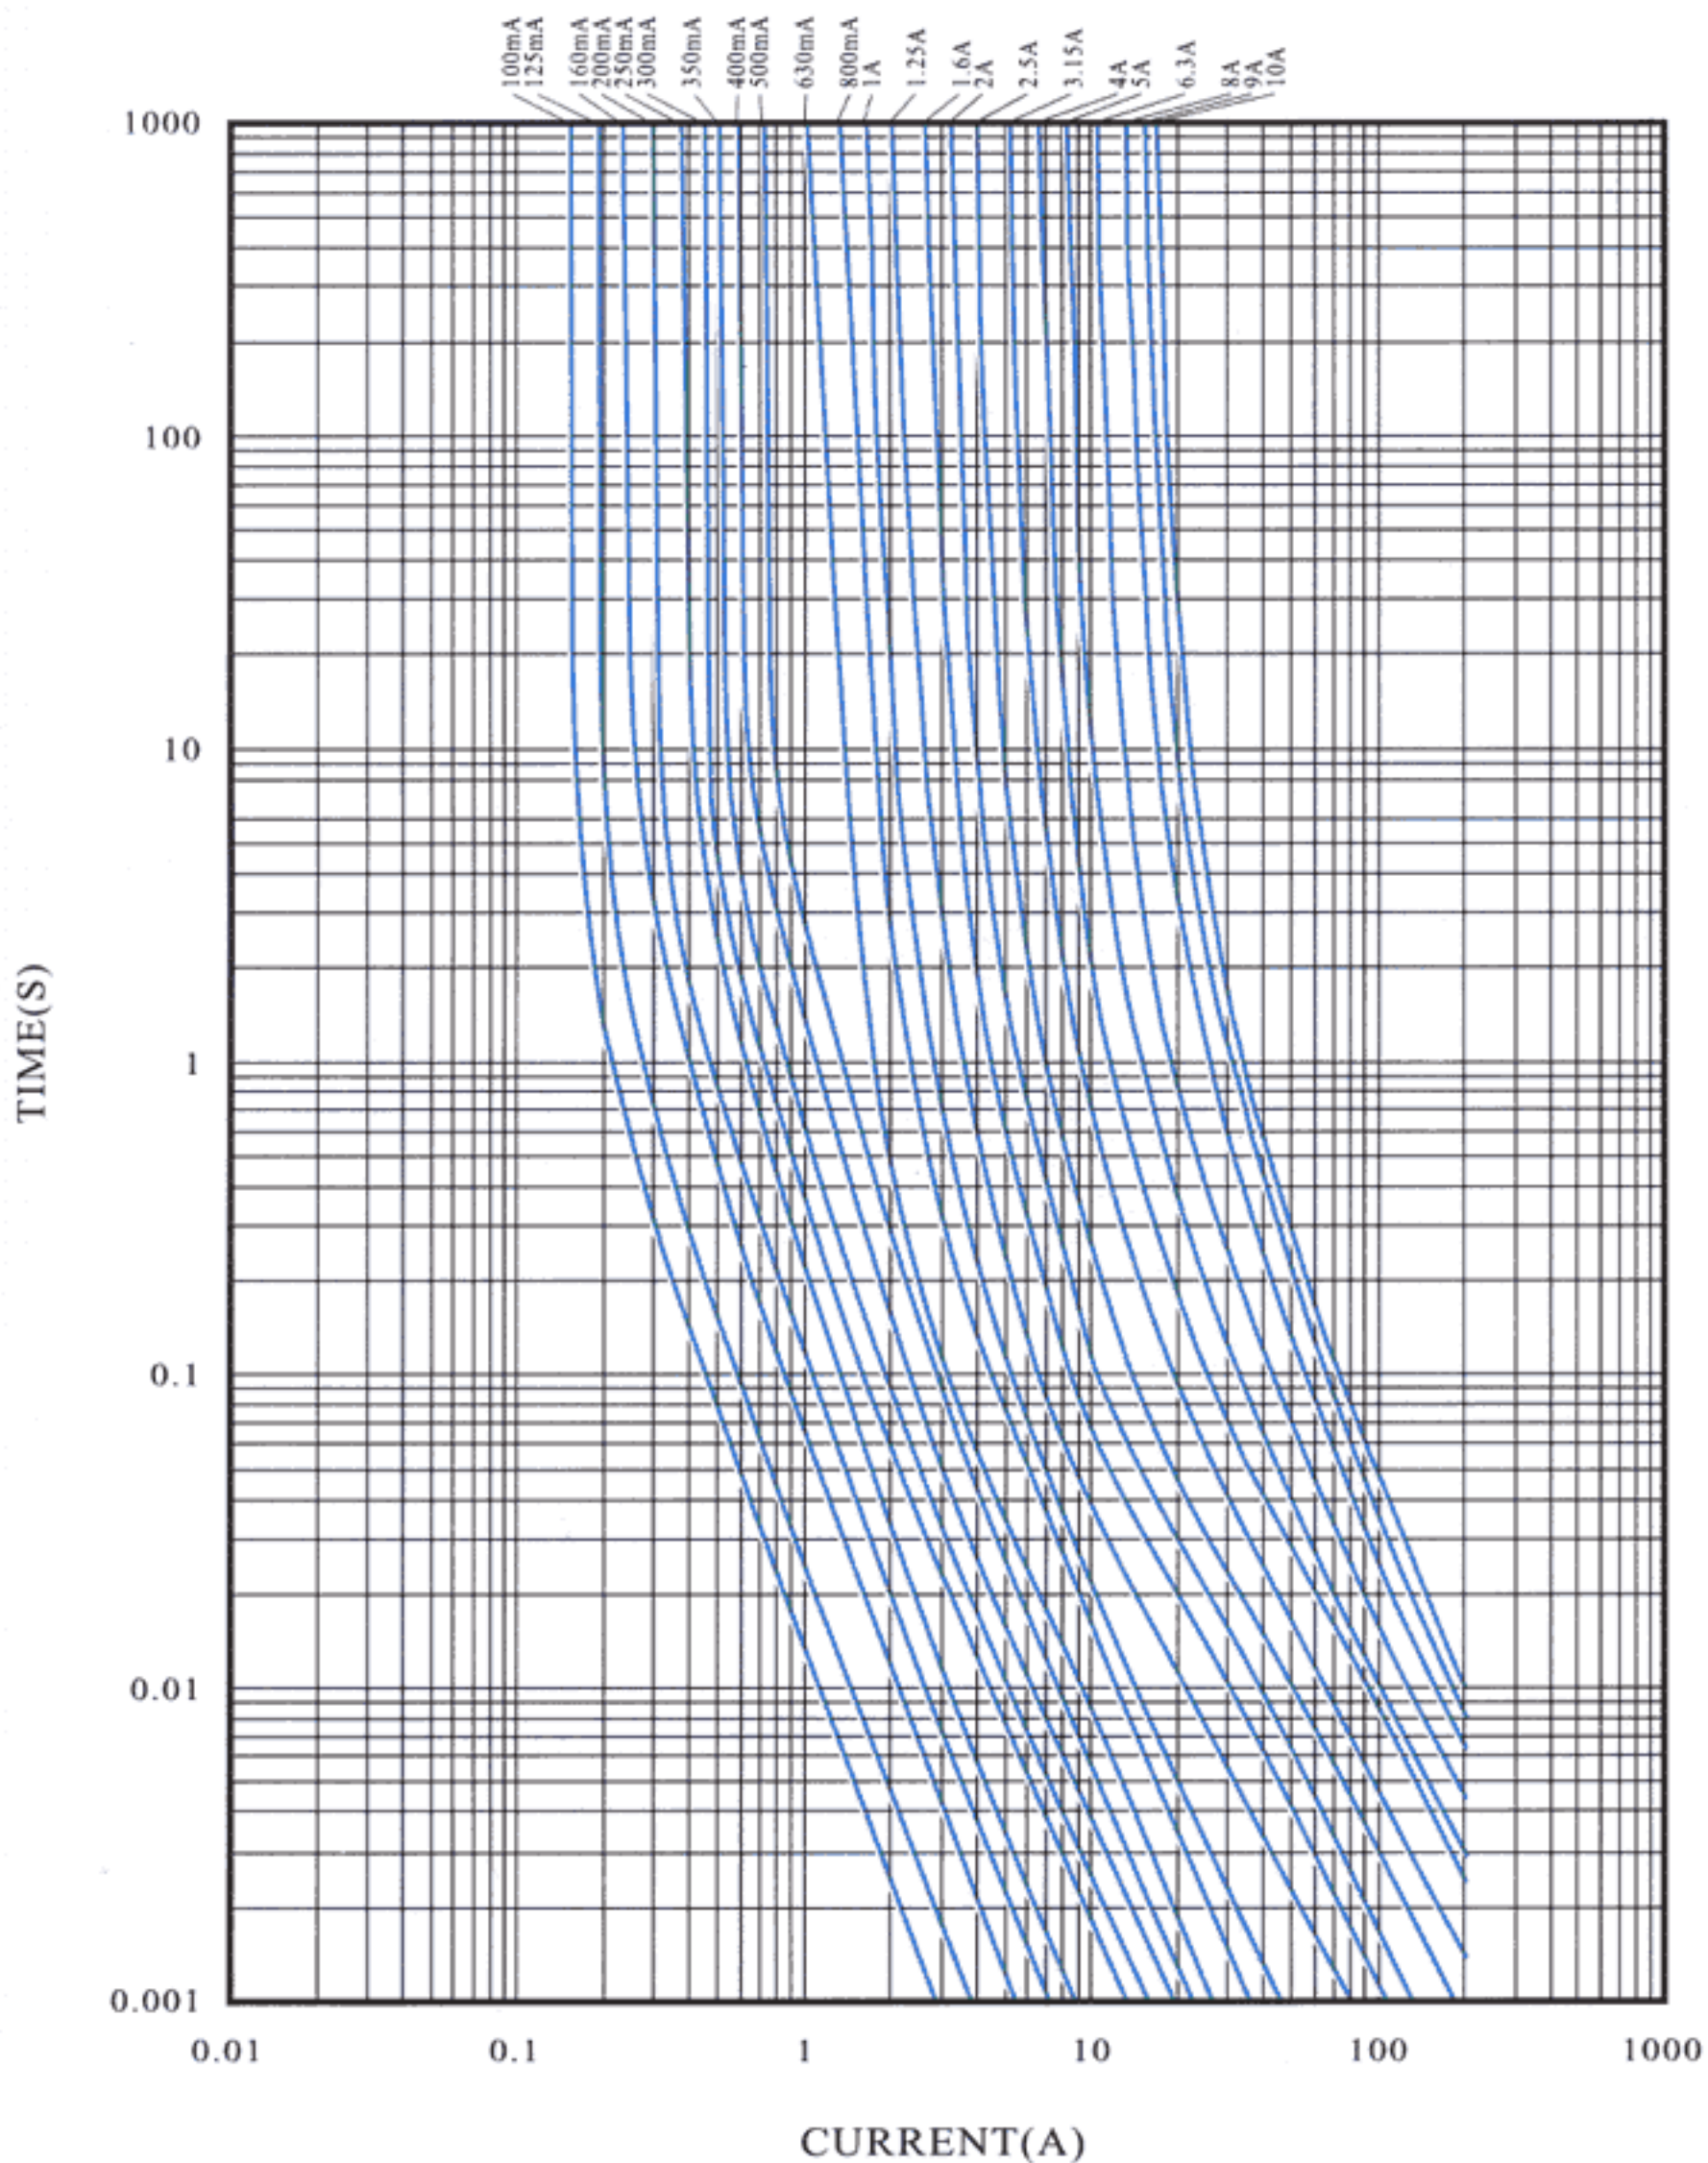

CATALOG NO.	AMPERE RATING	APPROVALS		I <sup>2</sup> T REFERENCE (A <sup>2</sup> .S)
		PSE		
		H	L	
0100H/L	100mA			0.012
0125H/L	125mA			0.018
0150H/L	150mA			0.039
0160H/L	160mA			0.042
0200H/L	200mA			0.058
0250H/L	250mA			0.087
0300H/L	300mA			0.17
0315H/L	315mA			0.20
0350H/L	350mA			0.23
0375H/L	375mA			0.29
0400H/L	400mA			0.37
0500H/L	500mA			0.52
0600H/L	600mA			0.69
0630H/L	630mA			0.80
0700H/L	700mA			1.2
0750H/L	750mA			1.4
0800H/L	800mA			1.6
010H/L	1A	●	●	3.9
012H/L	1.2A	●	●	4.8
013H/L	1.25A	●	●	8.7
015H/L	1.5A	●	●	9.8
016H/L	1.6A	●	●	15
020H/L	2A	●	●	26
025H/L	2.5A	●	●	37
030H/L	3A	●	●	41
032H/L	3.15A	●	●	61
035H/L	3.5A	●	●	71
040H/L	4A	●	●	82
050H/L	5A	●	●	109
060H/L	6A	●	●	149
063H/L	6.3A	●	●	180
070H/L	7A	●	●	205
080H/L	8A	●	●	231
090H/L	9A	●	●	320
100H/L	10A	●	●	387
120H/L	12A	●	●	624
150H/L	15A	●	●	1048

H DENOTES FOR 250V  
 L DENOTES FOR 125V  
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:  
 500 amperes at 125V AC (1A-15A) PSE  
 100 amperes at 250V AC (1A-15A) PSE

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
130%	1 hour Min
160%	1 hour Max
200%	120 sec Max