



51NM, 52NM  $5.2\phi \times 20$

GLASS TUBE FUSE (FAST-BLOW)

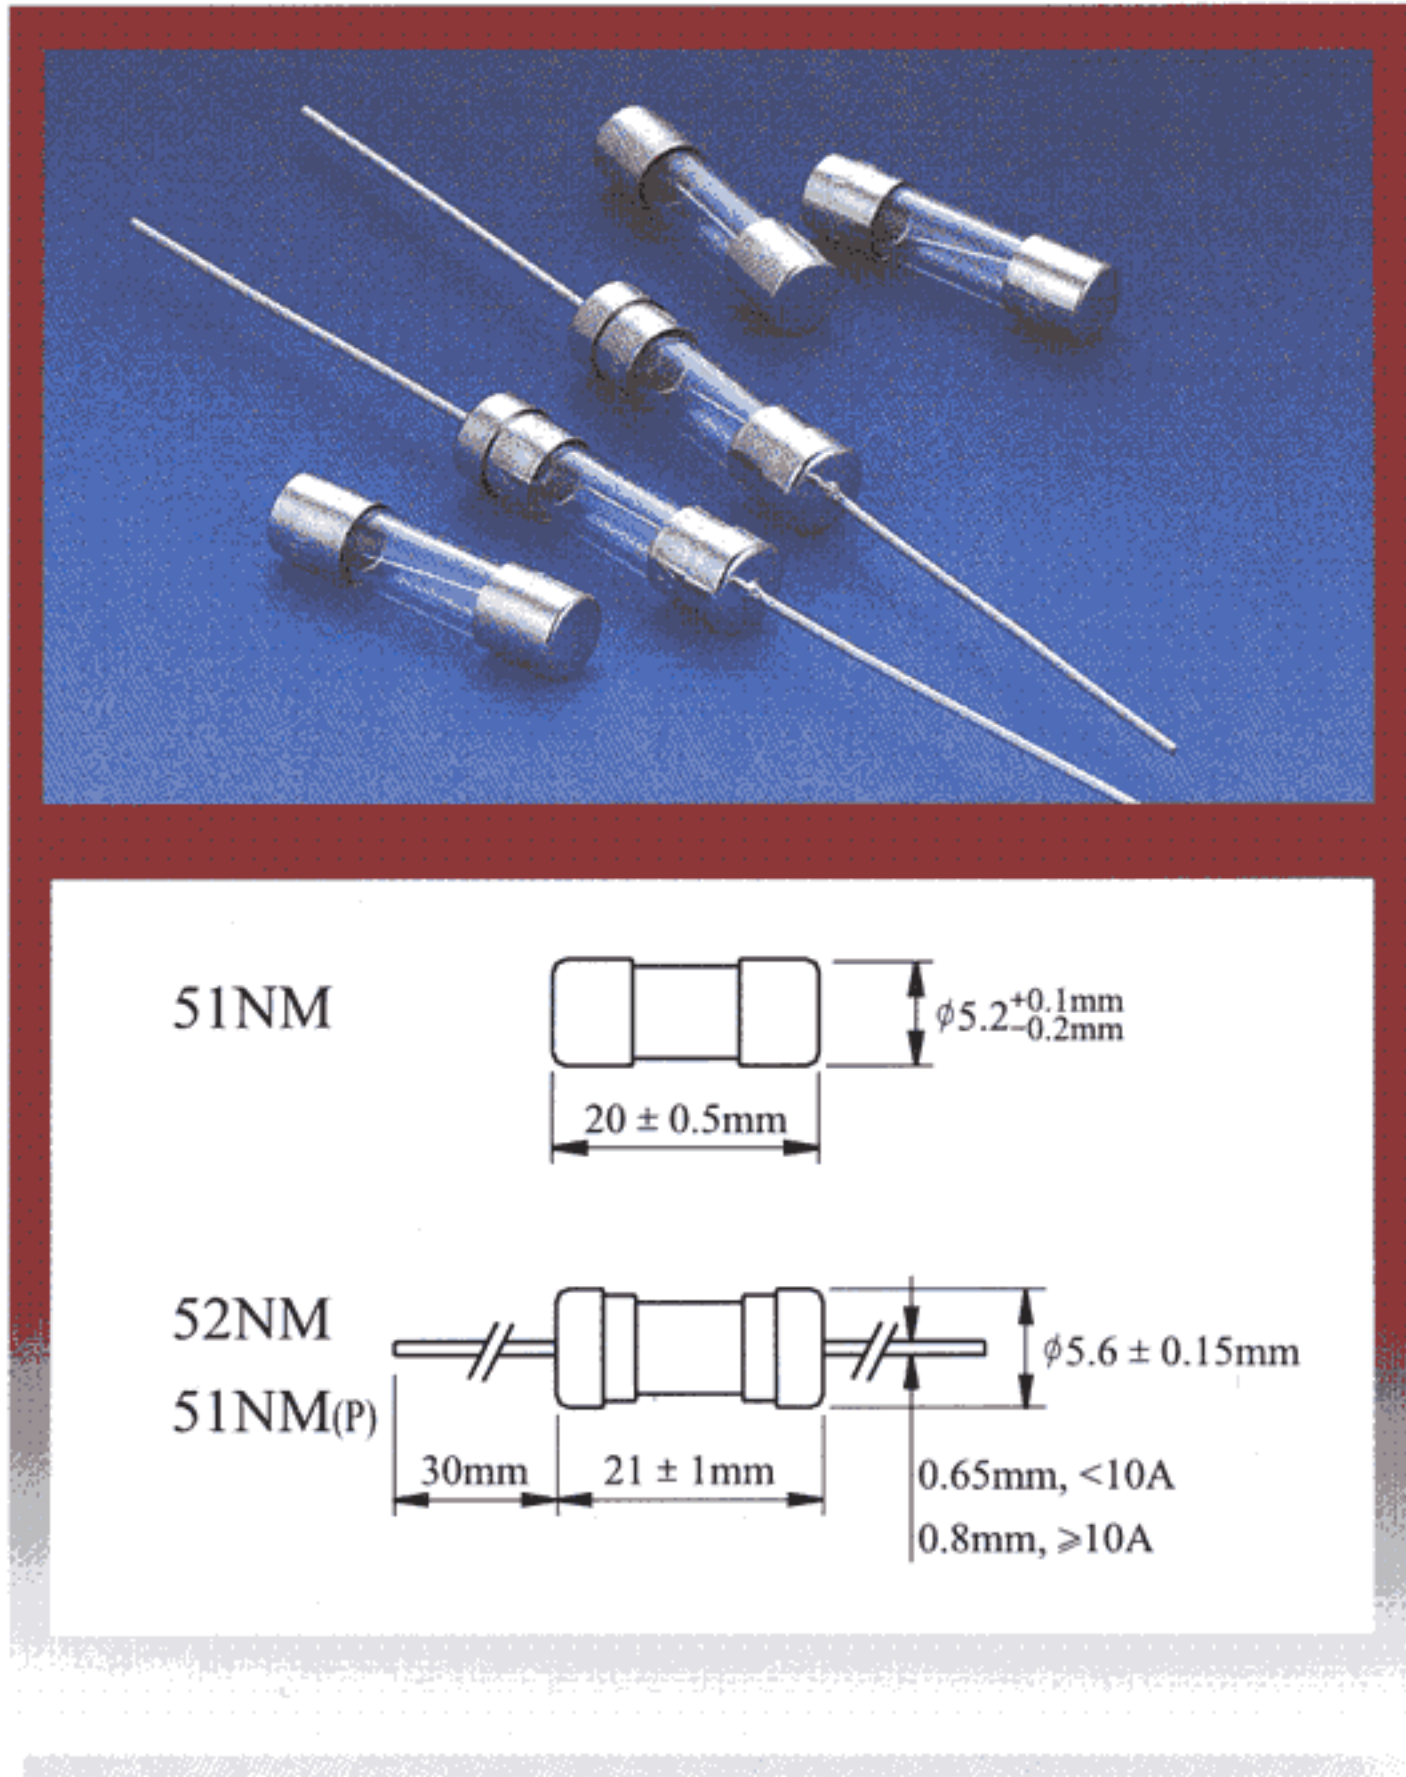

I-T CHARACTERISTICS CURVE

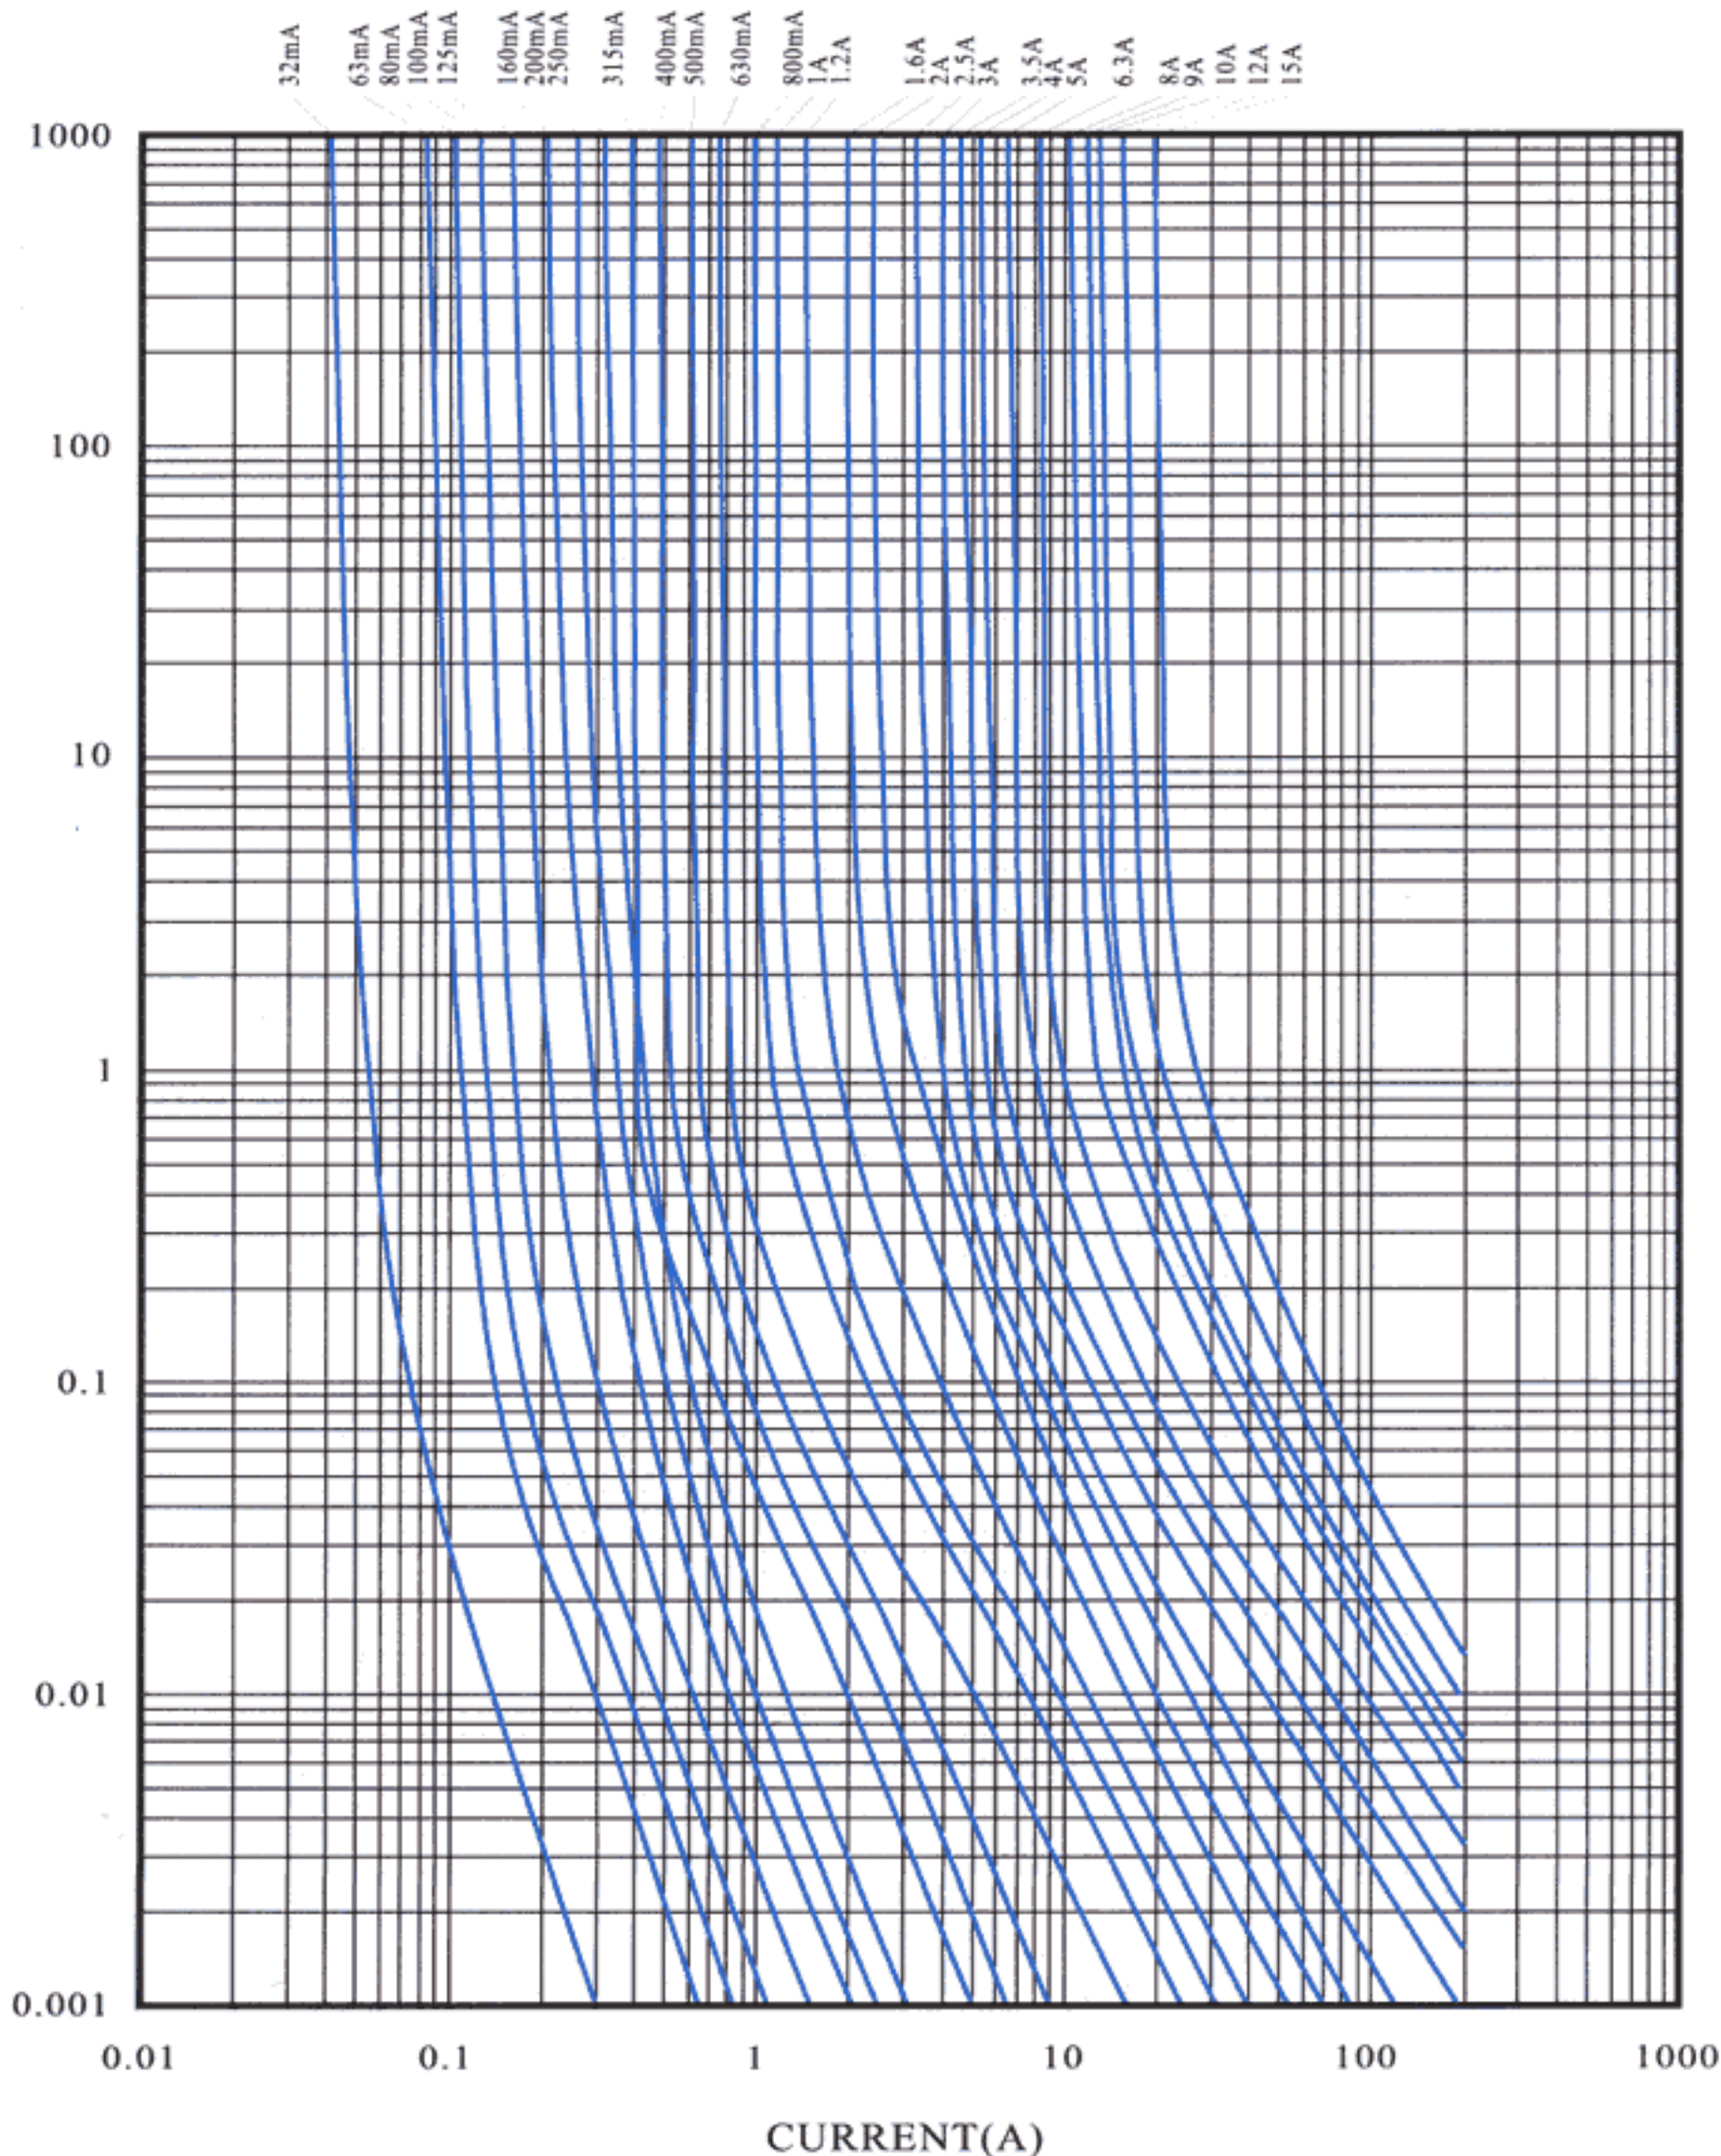

CATALOG NO.	AMPERE RATING	APPROVALS										I <sup>2</sup> T REFERENCE (A <sup>2</sup> .S)
		UL		UR		CSA		PSE		KTL		
		H	L	H	L	H	L	H	L	H		
0032H/L	32mA	●	●			●	●					0.00020
0050H/L	50mA	●	●			●	●					0.00054
0063H/L	63mA	●	●			●	●					0.00092
0080H/L	80mA	●	●			●	●					0.0015
0100H/L	100mA	●	●			●	●			●		0.0023
0125H/L	125mA	●	●			●	●			●		0.0039
0150H/L	150mA	●	●			●	●			●		0.0054
0160H/L	160mA	●	●			●	●			●		0.0065
0200H/L	200mA	●	●			●	●			●		0.010
0250H/L	250mA	●	●			●	●			●		0.018
0300H/L	300mA	●	●			●	●			●		0.039
0315H/L	315mA	●	●			●	●			●		0.04
0350H/L	350mA	●	●			●	●			●		0.05
0400H/L	400mA	●	●			●	●			●		0.07
0500H/L	500mA	●	●			●	●			●		0.13
0600H/L	600mA	●	●			●	●			●		0.24
0630H/L	630mA	●	●			●	●			●		0.29
0750H/L	750mA	●	●			●	●			●		0.39
0800H/L	800mA	●	●			●	●			●		0.51
010H/L	1A	●	●			●	●	●	●	●		0.65
012H/L	1.2A	●	●			●	●	●	●	●		1.1
013H/L	1.25A	●	●			●	●	●	●	●		1.7
015H/L	1.5A	●	●			●	●	●	●	●		1.8
016H/L	1.6A	●	●			●	●	●	●	●		2.4
020H/L	2A	●	●			●	●	●	●	●		2.7
025H/L	2.5A	●	●			●	●	●	●	●		3.9
030H/L	3A		●	●		●	●	●	●	●		13
032H/L	3.15A		●	●		●	●	●	●	●		19
035H/L	3.5A		●	●		●	●	●	●	●		20
040H/L	4A		●	●		●	●	●	●	●		29
050H/L	5A		●	●		●	●	●	●	●		39
060H/L	6A		●	●		●	●	●	●	●		65
063H/L	6.3A		●	●		●	●	●	●	●		83
070H/L	7A		●	●		●	●	●	●	●		123
080H/L	8A		●	●		●	●	●	●	●		175
090H/L	9A							●	●			237
100H/L	10A							●	●			271
120H/L	12A							●	●			336
150H/L	15A							●	●			461

H DENOTES FOR 250V  
 L DENOTES FOR 125V  
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:  
 10,000 amperes at 125V AC (32mA-8A)  
 35 amperes at 250V AC (32mA-1A)  
 100 amperes at 250V AC (1.2A-3.5A)  
 200 amperes at 250V AC (4A-8A)  
 500 amperes at 125V AC (1A-15A) PSE  
 100 amperes at 250V AC (100mA-15A) PSE, KTL

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	5 sec Max