

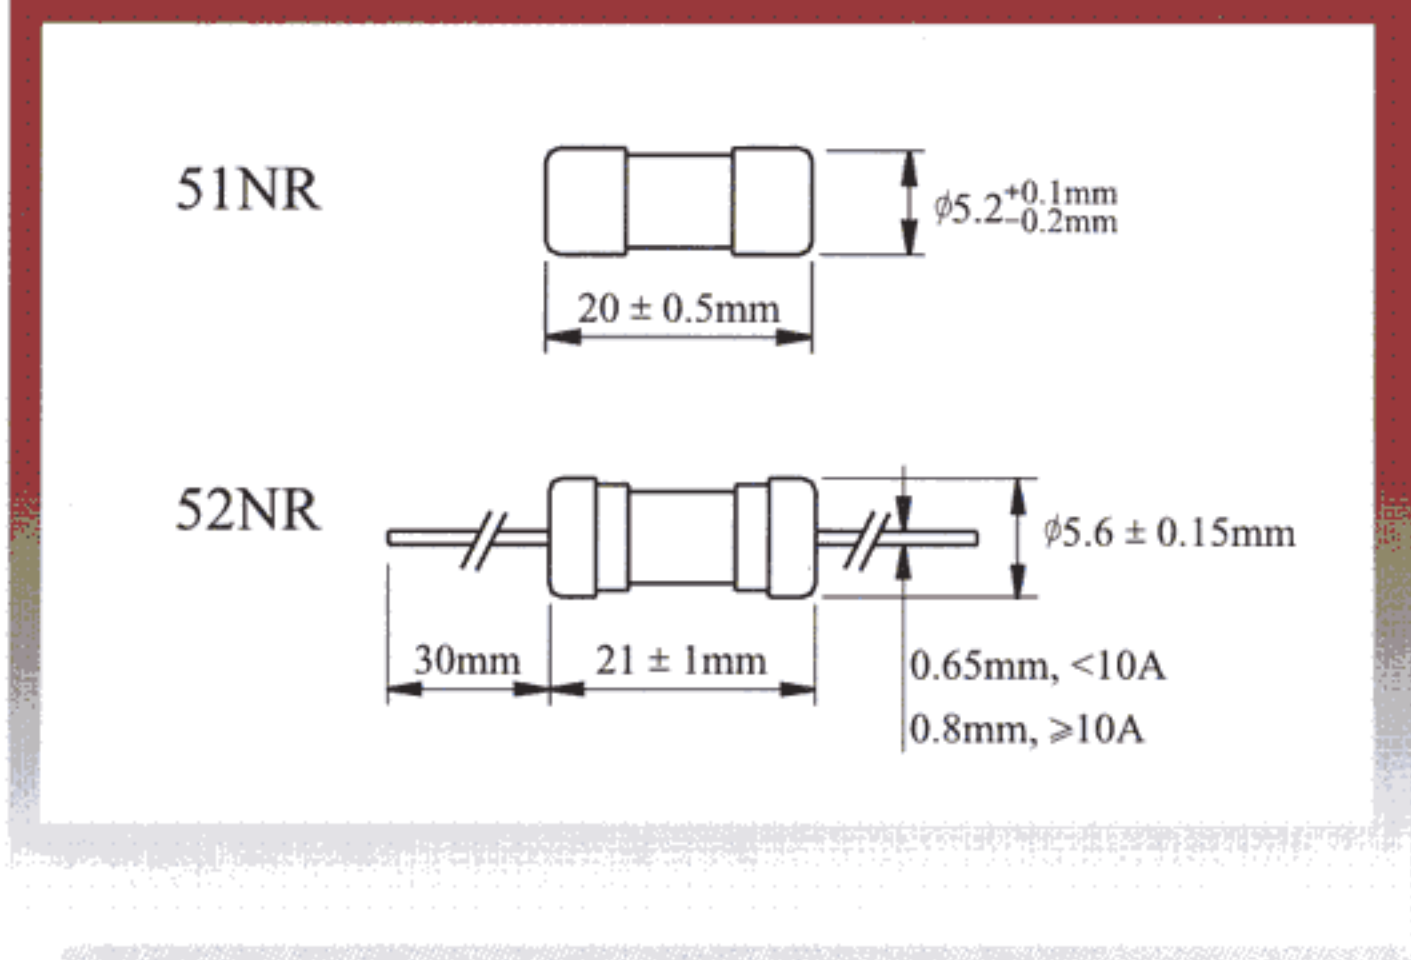


51NR,52NR $5.2^{\phi} \times 20$

GLASS TUBE FUSE (FAST-BLOW)

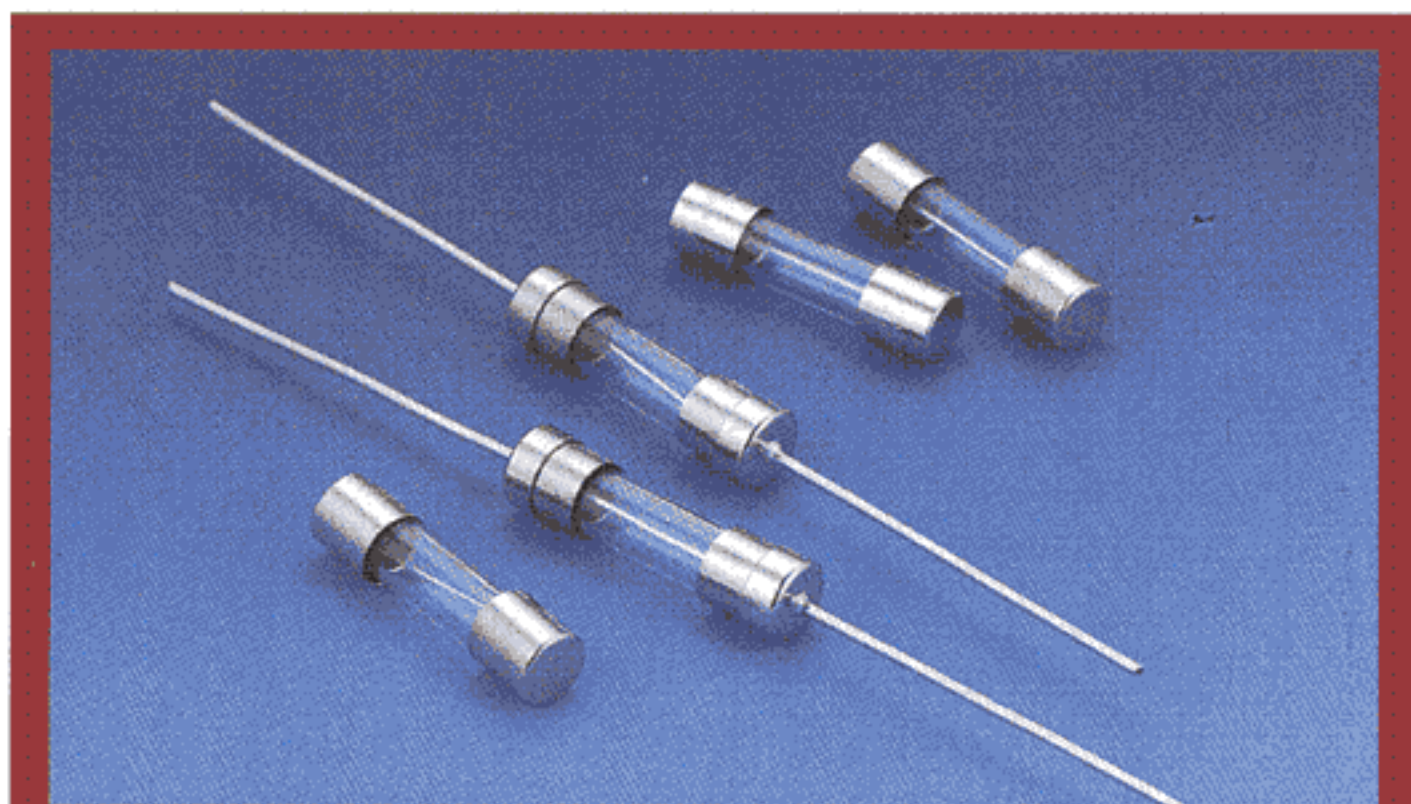

I-T CHARACTERISTICS CURVE

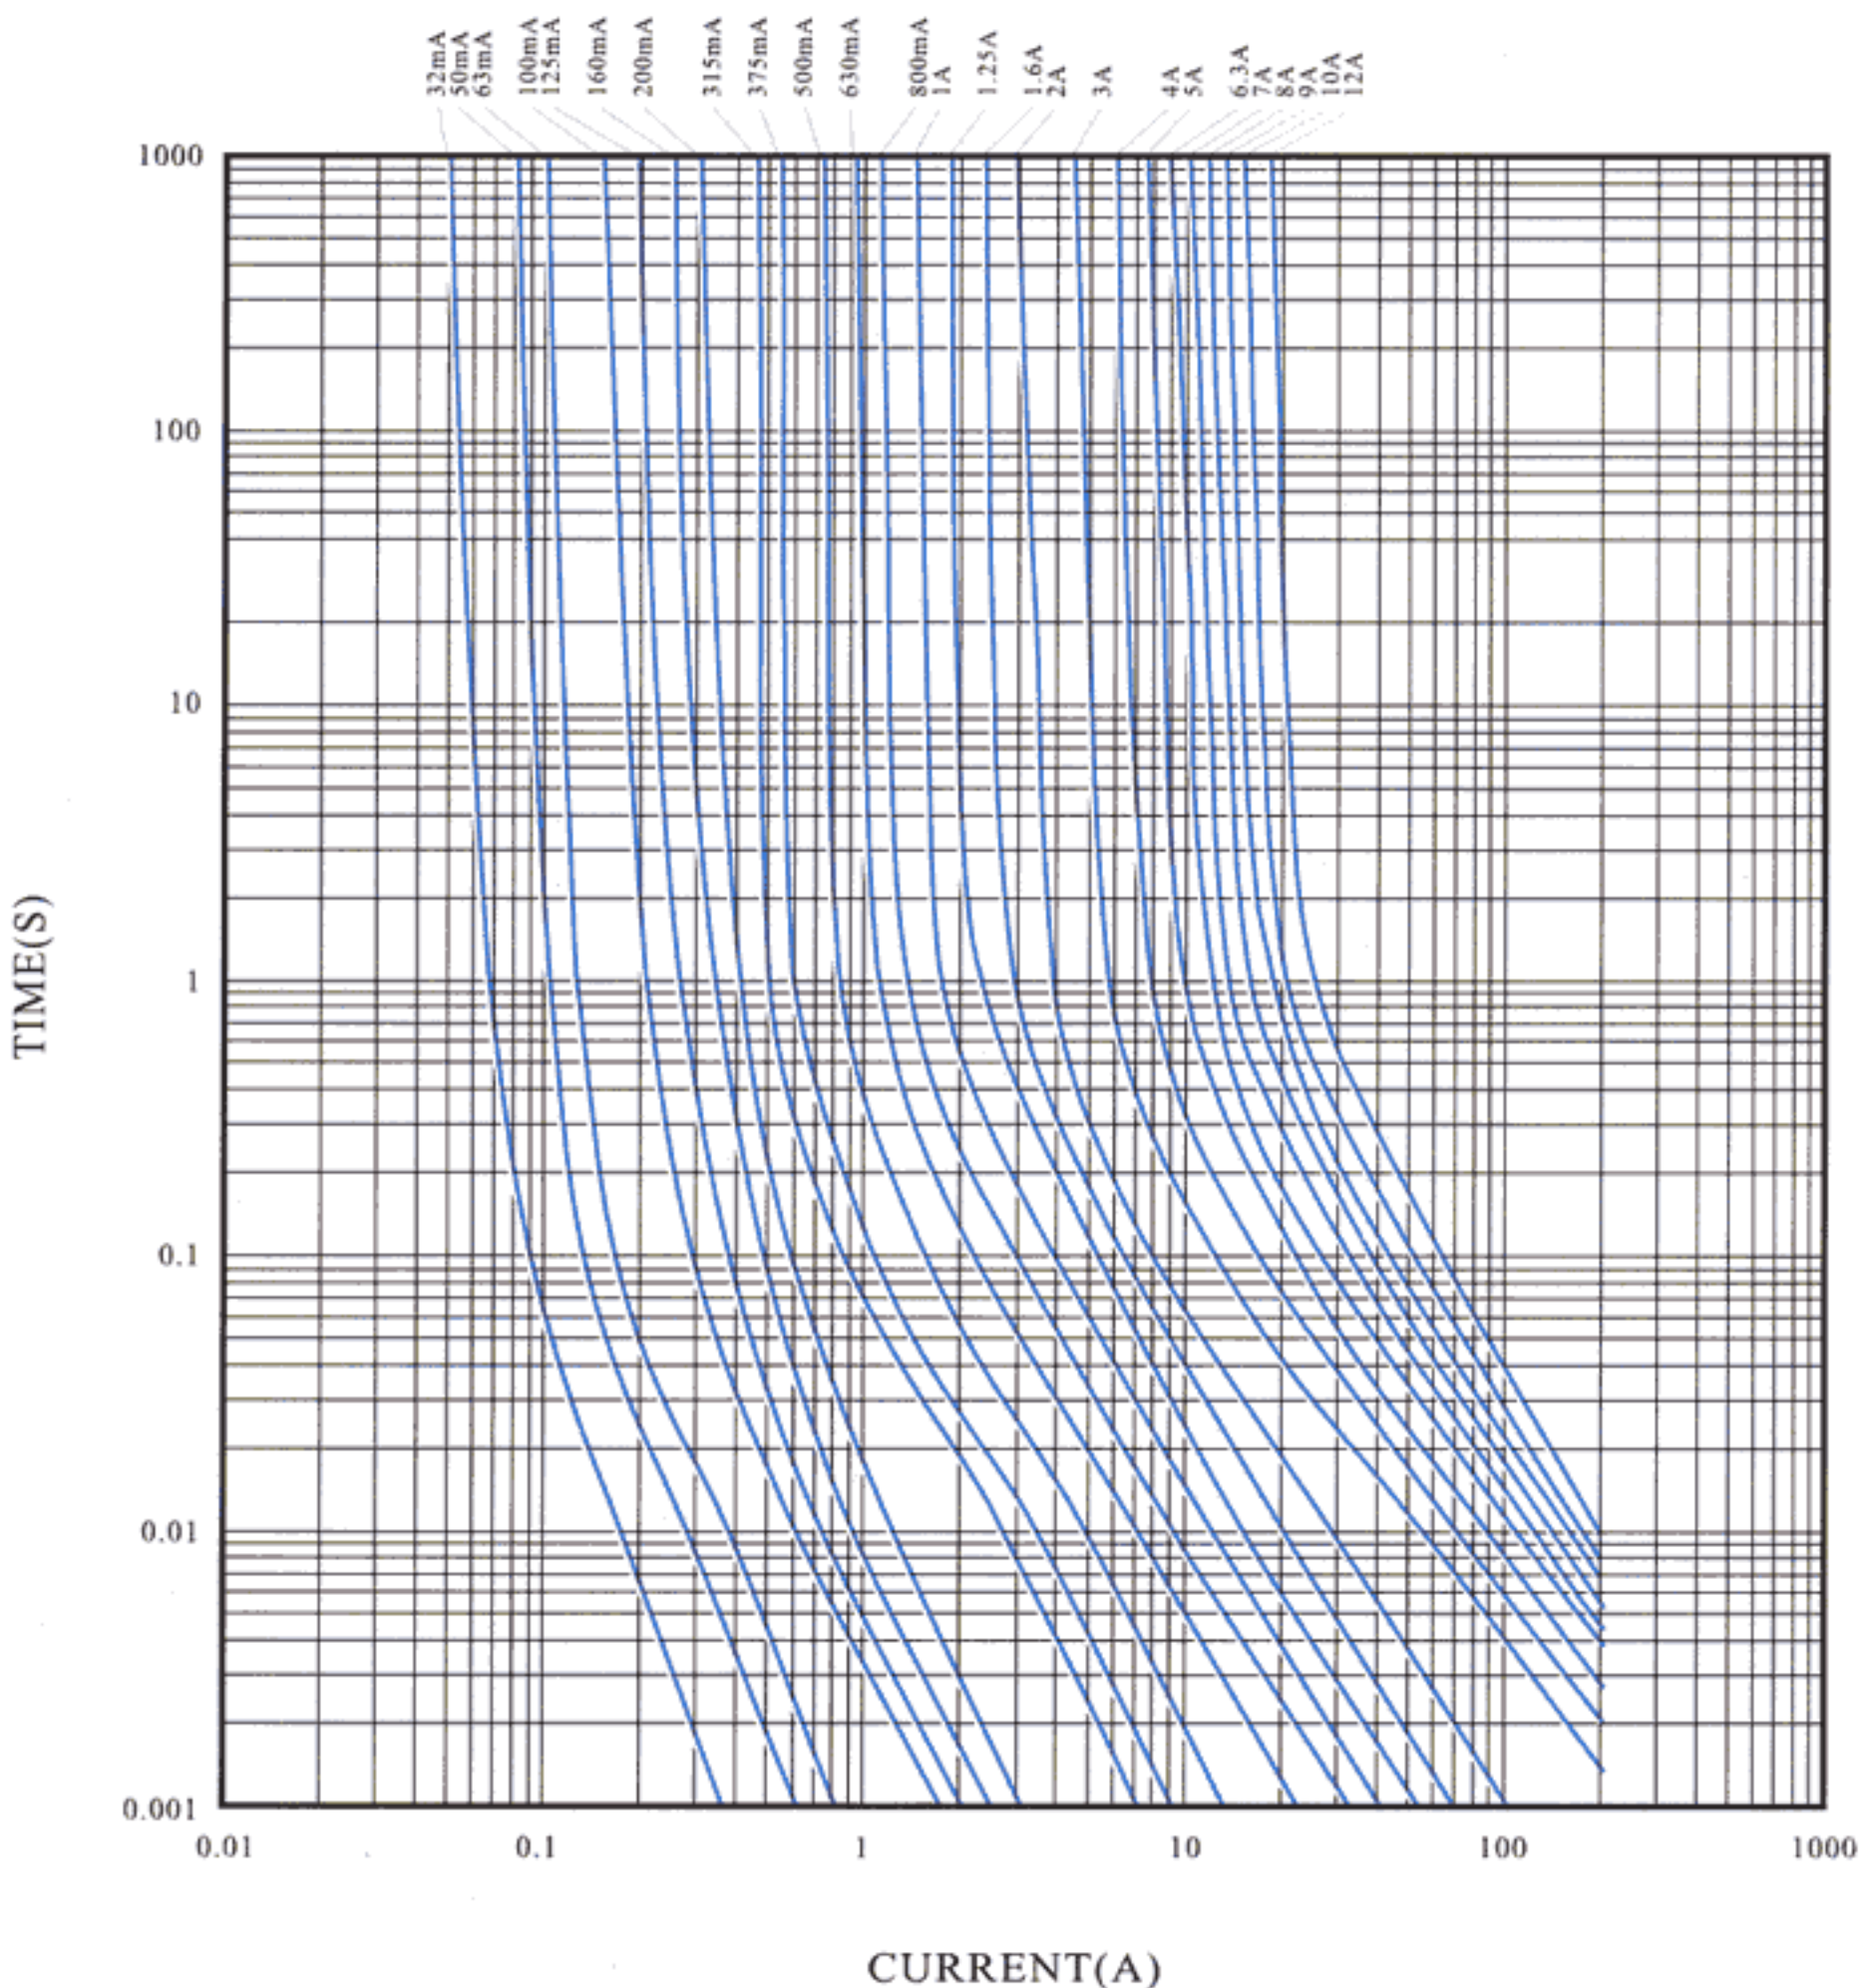

| CATALOG NO. | AMPERE RATING | APPROVALS | | | I ² T REFERENCE (A ² .S) |
|-------------|---------------|-----------|---|-----|--|
| | | PSE | | KTL | |
| | | H | L | H | |
| 0100H/L | 100mA | | | ● | 0.0033 |
| 0125H/L | 125mA | | | ● | 0.0050 |
| 0150H/L | 150mA | | | ● | 0.0066 |
| 0160H/L | 160mA | | | ● | 0.0074 |
| 0175H/L | 175mA | | | ● | 0.0088 |
| 0200H/L | 200mA | | | ● | 0.015 |
| 0250H/L | 250mA | | | ● | 0.042 |
| 0300H/L | 300mA | | | ● | 0.061 |
| 0315H/L | 315mA | | | ● | 0.074 |
| 0350H/L | 350mA | | | ● | 0.10 |
| 0375H/L | 375mA | | | ● | 0.12 |
| 0400H/L | 400mA | | | ● | 0.15 |
| 0500H/L | 500mA | | | ● | 0.21 |
| 0600H/L | 600mA | | | ● | 0.44 |
| 0630H/L | 630mA | | | ● | 0.51 |
| 0700H/L | 700mA | | | ● | 0.66 |
| 0750H/L | 750mA | | | ● | 0.74 |
| 0800H/L | 800mA | | | ● | 0.81 |
| 010H/L | 1A | ● | ● | ● | 1.5 |
| 012H/L | 1.2A | ● | ● | ● | 1.8 |
| 013H/L | 1.25A | ● | ● | ● | 2.0 |
| 015H/L | 1.5A | ● | ● | ● | 3.2 |
| 016H/L | 1.6A | ● | ● | ● | 3.9 |
| 020H/L | 2A | ● | ● | ● | 12 |
| 025H/L | 2.5A | ● | ● | ● | 22 |
| 030H/L | 3A | ● | ● | ● | 33 |
| 032H/L | 3.15A | ● | ● | ● | 39 |
| 035H/L | 3.5A | ● | ● | ● | 43 |
| 040H/L | 4A | ● | ● | ● | 51 |
| 050H/L | 5A | ● | ● | ● | 80 |
| 060H/L | 6A | ● | ● | ● | 97 |
| 063H/L | 6.3A | ● | ● | ● | 135 |
| 070H/L | 7A | ● | ● | ● | 157 |
| 080H/L | 8A | ● | ● | ● | 205 |
| 090H/L | 9A | ● | ● | ● | 245 |
| 100H/L | 10A | ● | ● | ● | 304 |
| 120H/L | 12A | ● | ● | ● | 353 |
| 150H/L | 15A | ● | ● | ● | 595 |

H DENOTES FOR 250V
 L DENOTES FOR 125V
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:
 500 amperes at 125V AC (1A-15A)
 100 amperes at 250V AC (100mA-15A)

ELECTRICAL CHARACTERISTICS:

| RATING | BLOWING TIME |
|--------|--------------|
| 130% | 1 hour Min |
| 160% | 1 hour Max |
| 200% | 120 sec Max |