



51S,52S 5.2 ϕ × 20

GLASS TUBE FUSE (SLOW-BLOW)

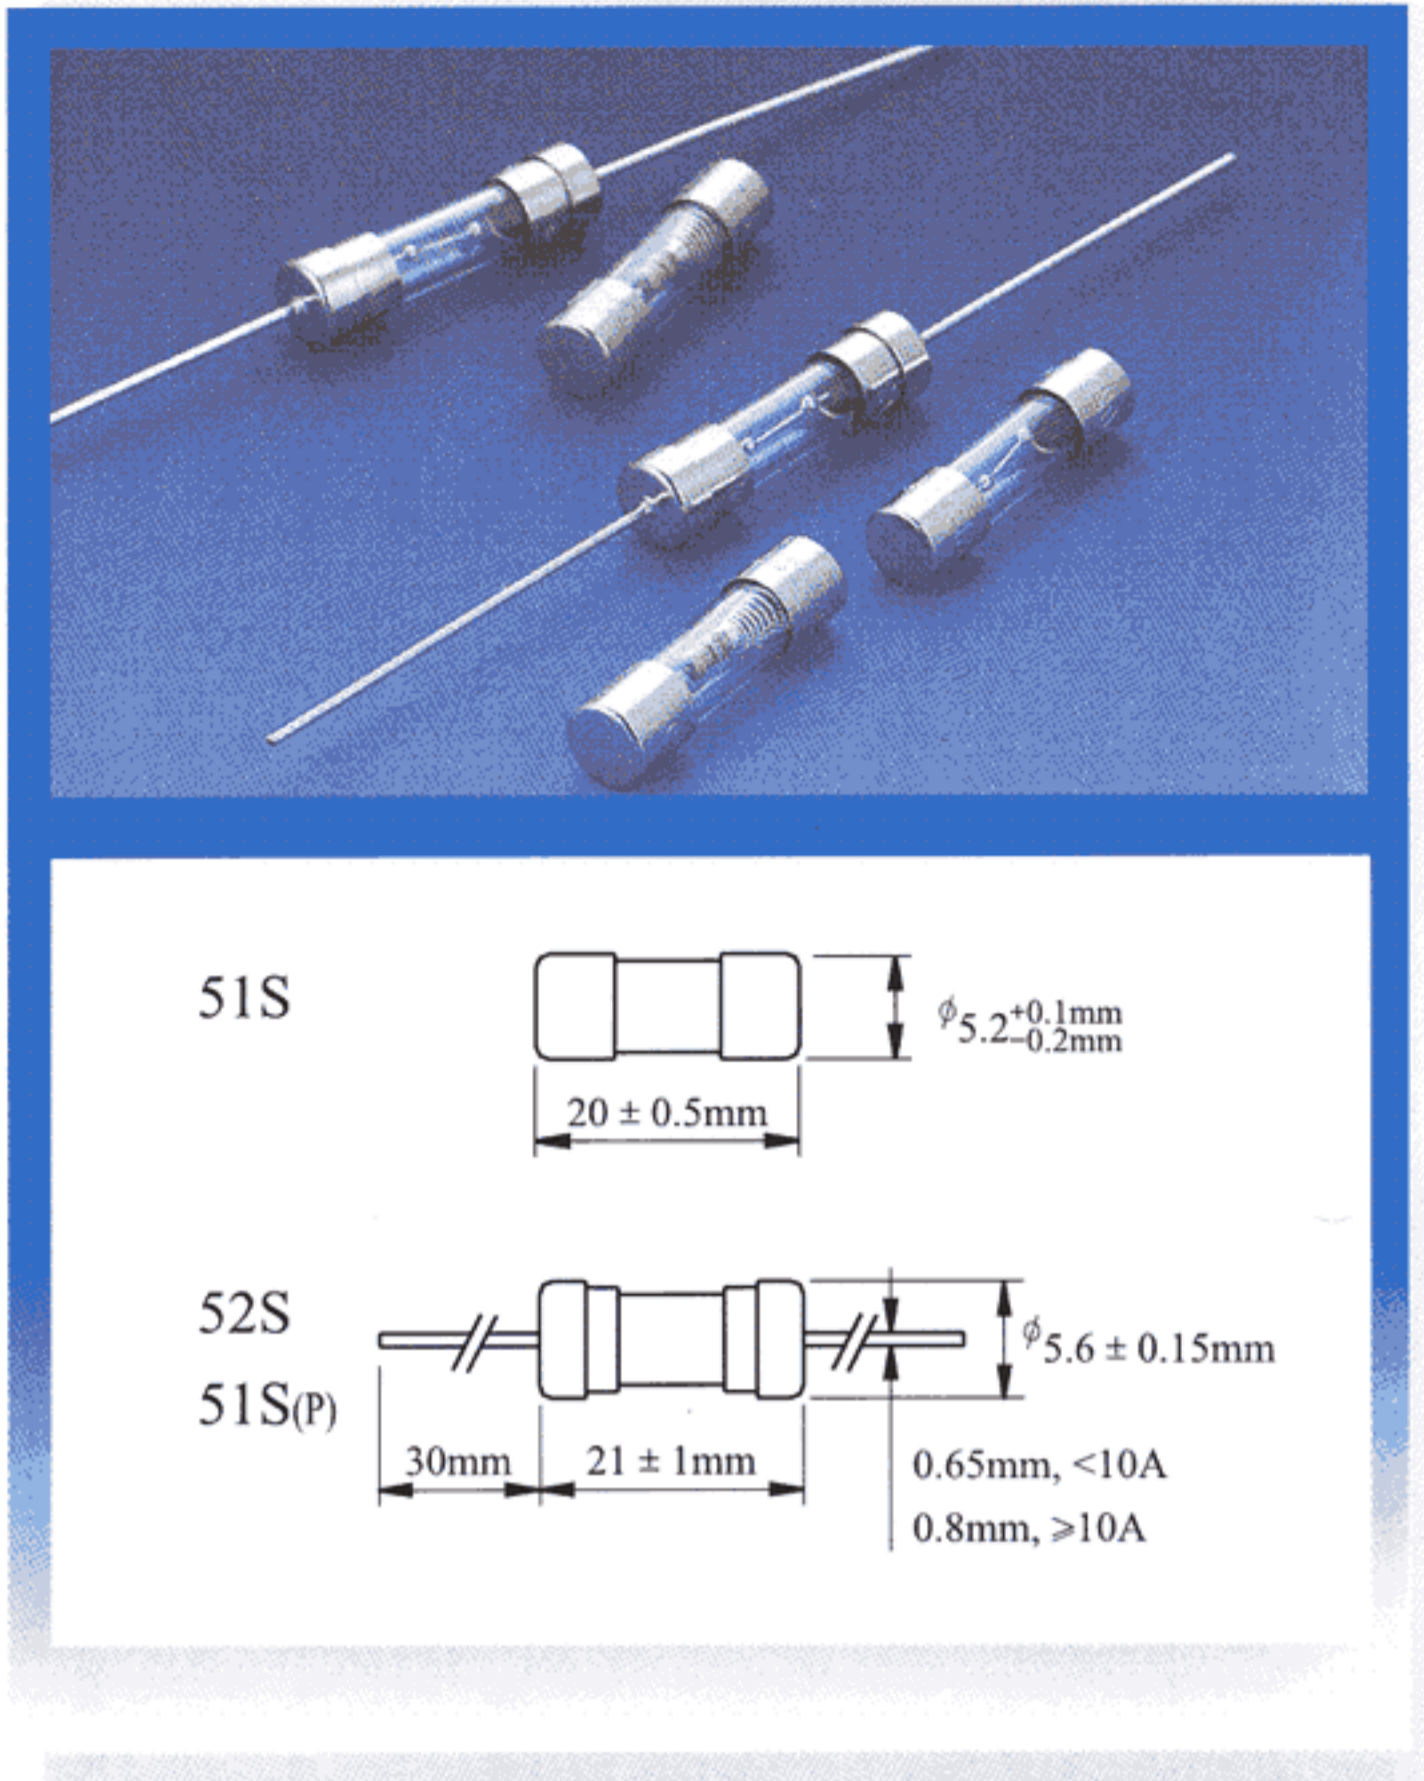

I-T CHARACTERISTICS CURVE

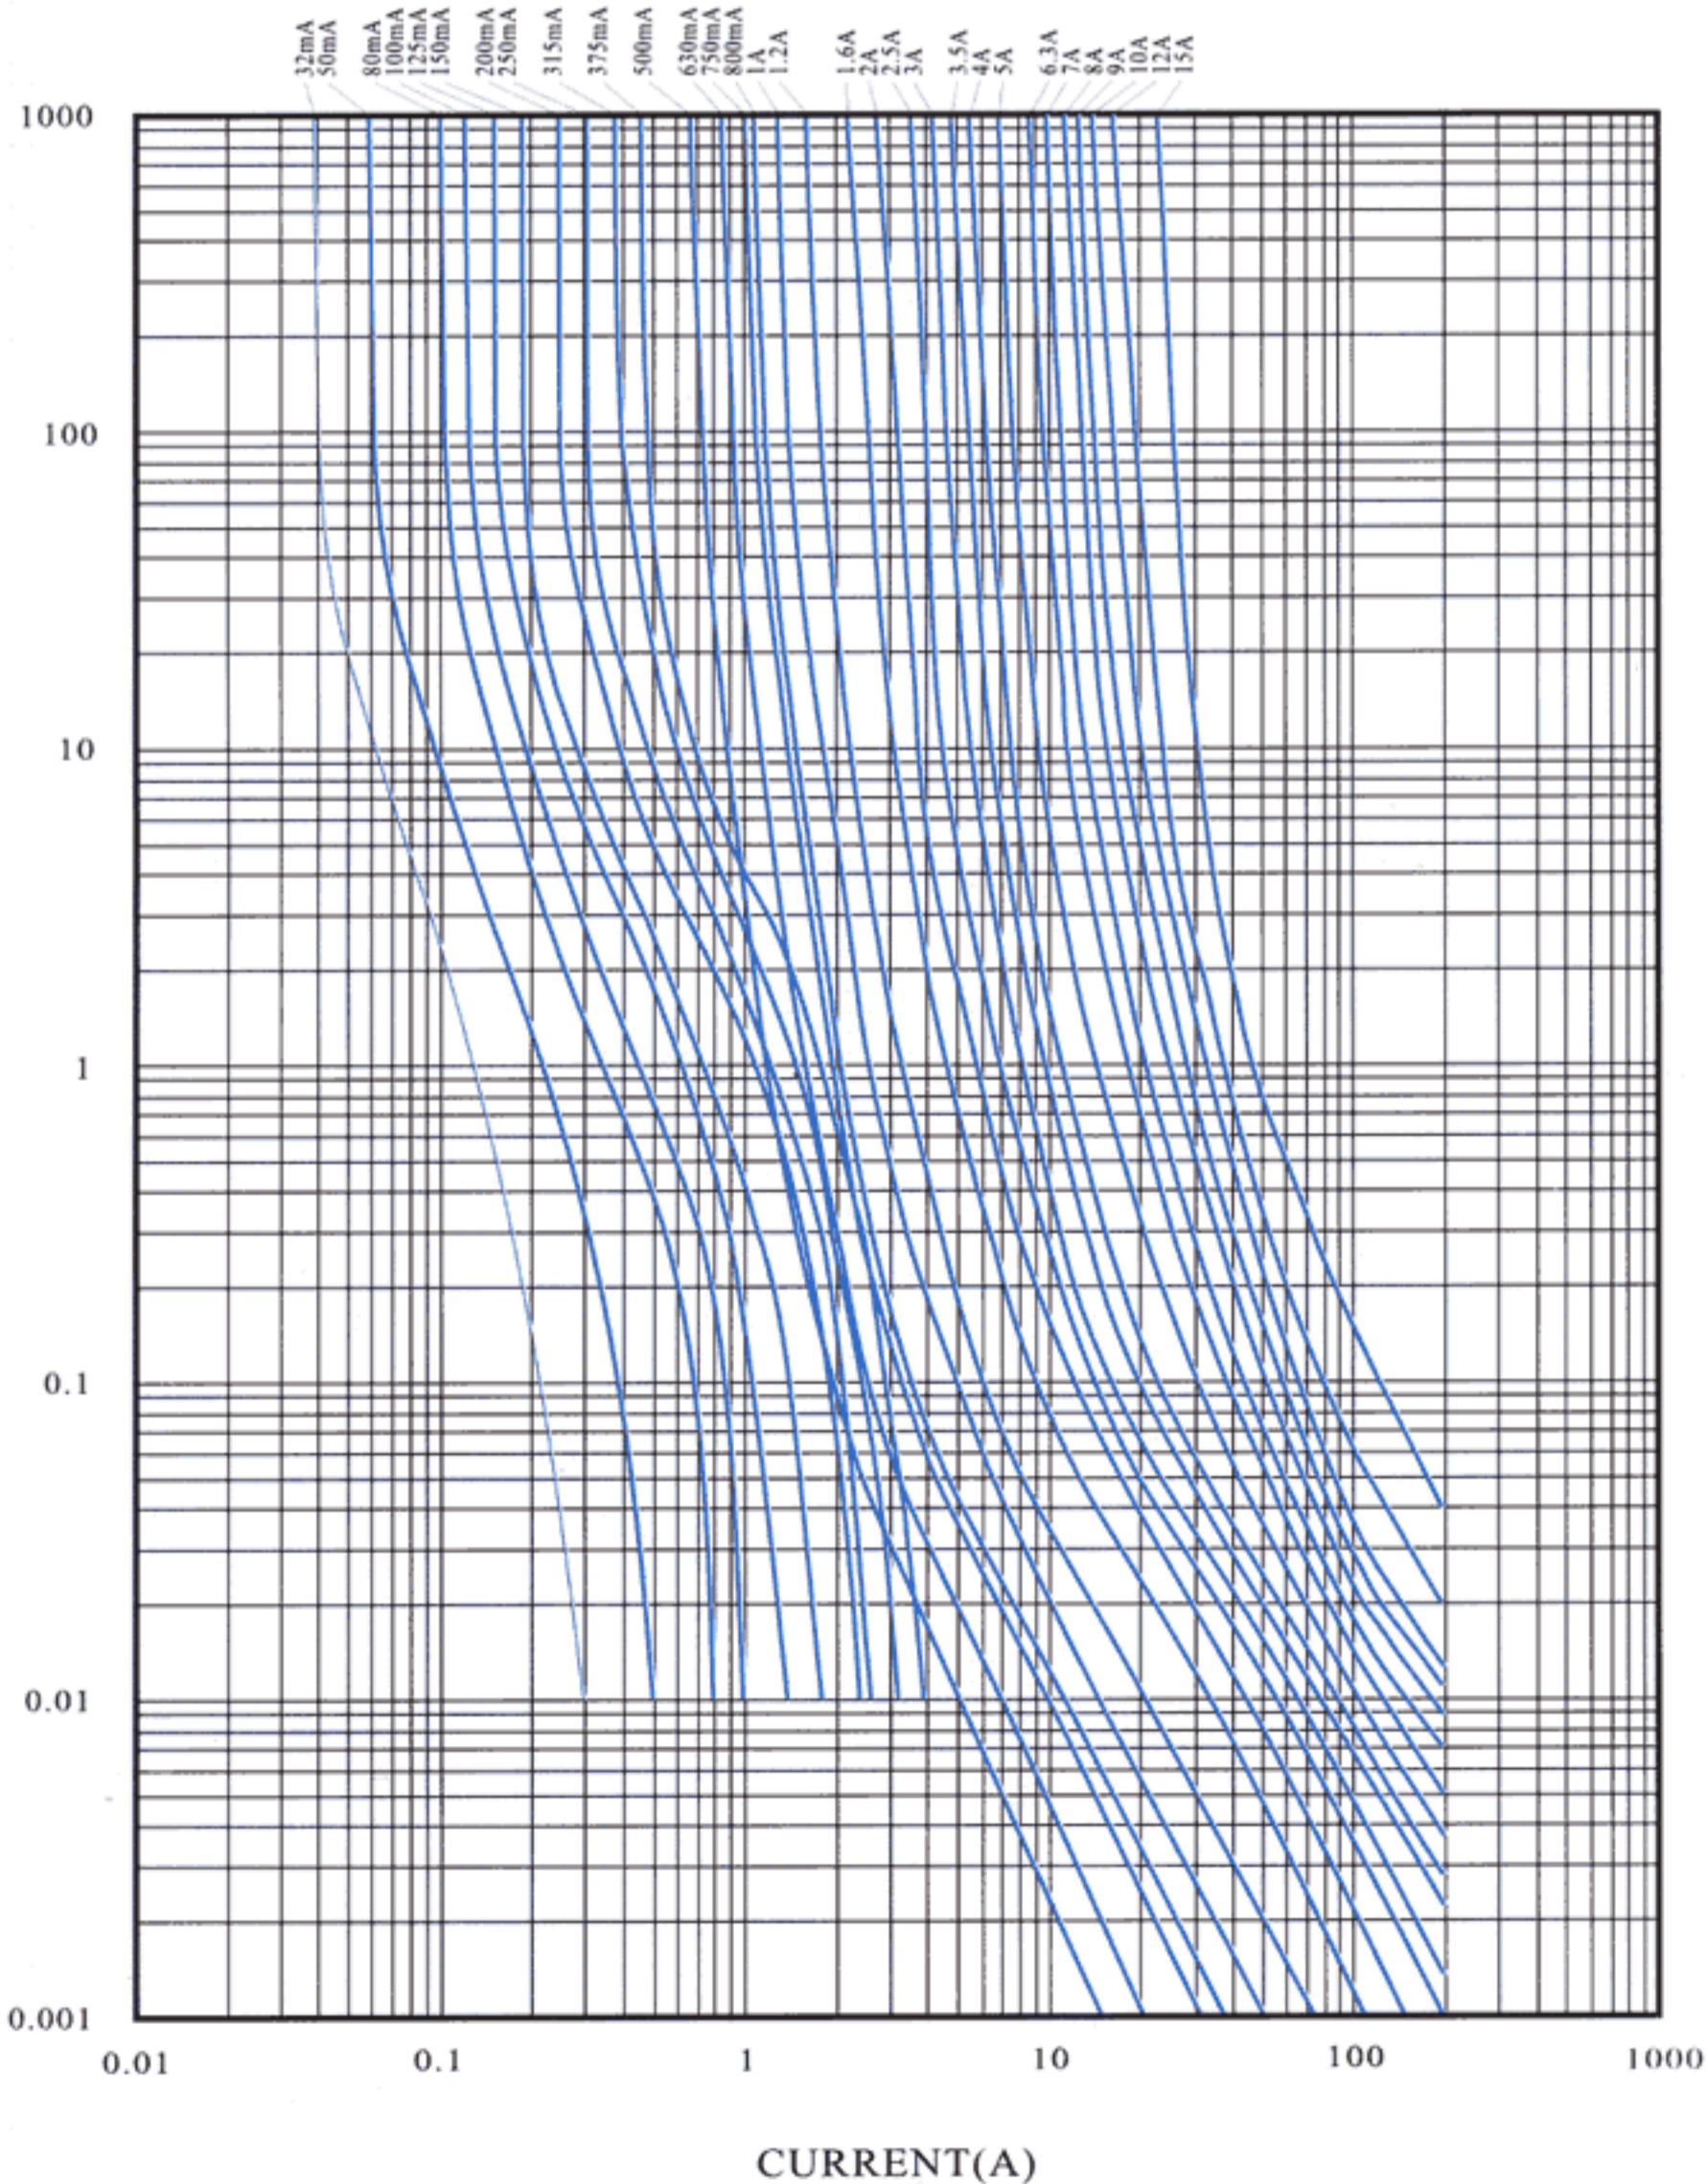

CATALOG NO.	AMPERE RATING	APPROVALS										I ² T REFERENCE (A ² .S)
		UL		UR		CSA		PSE		KTL		
		H	L	H	L	H	L	H	L	H		
0032H/L	32mA	●	●			●	●					0.00077
0050H/L	50mA	●	●			●	●					0.0020
0063H/L	63mA	●	●			●	●					0.0033
0080H/L	80mA	●	●			●	●					0.0051
0100H/L	100mA	●	●			●	●			●		0.0080
0125H/L	125mA	●	●			●	●			●		0.016
0150H/L	150mA	●	●			●	●			●		0.025
0160H/L	160mA	●	●			●	●			●		0.032
0200H/L	200mA	●	●			●	●			●		0.042
0250H/L	250mA	●	●			●	●			●		0.046
0300H/L	300mA	●	●			●	●			●		0.079
0315H/L	315mA	●	●			●	●			●		0.085
0350H/L	350mA	●	●			●	●			●		0.098
0375H/L	375mA	●	●			●	●			●		0.13
0400H/L	400mA	●	●			●	●			●		0.15
0500H/L	500mA	●	●			●	●			●		0.26
0600H/L	600mA	●	●			●	●			●		0.41
0630H/L	630mA	●	●			●	●			●		0.51
0750H/L	750mA	●	●			●	●			●		1.2
0800H/L	800mA	●	●			●	●			●		1.4
010H/L	1A	●	●			●	●	●	●	●		2.0
012H/L	1.2A	●	●			●	●	●	●	●		4.6
013H/L	1.25A	●	●			●	●	●	●	●		5.2
015H/L	1.5A	●	●			●	●	●	●	●		9.0
016H/L	1.6A	●	●			●	●	●	●	●		12
020H/L	2A	●	●			●	●	●	●	●		21
025H/L	2.5A	●	●			●	●	●	●	●		44
030H/L	3A		●	●		●	●	●	●	●		46
032H/L	3.15A		●	●		●	●	●	●	●		51
035H/L	3.5A		●	●		●	●	●	●	●		65
040H/L	4A		●	●		●	●	●	●	●		67
050H/L	5A		●	●		●	●	●	●	●		107
060H/L	6A			●	●	●	●	●	●	●		135
063H/L	6.3A			●	●	●	●	●	●	●		180
070H/L	7A			●	●	●	●	●	●	●		259
080H/L	8A			●	●	●	●	●	●	●		352
090H/L	9A							●	●	●		441
100H/L	10A							●	●	●		520
120H/L	12A							●	●			749
150H/L	15A							●	●			1170*

H DENOTES FOR 250V
 L DENOTES FOR 125V
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:
 10,000 amperes at 125V AC (32mA-8A)
 35 amperes at 250V AC (32mA-1A)
 100 amperes at 250V AC (1.2A-3.5A)
 200 amperes at 250V AC (4A-8A)
 500 amperes at 125V AC (1A-15A) PSE
 100 amperes at 250V AC (100mA-15A) PSE, KTL

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	120 sec Max