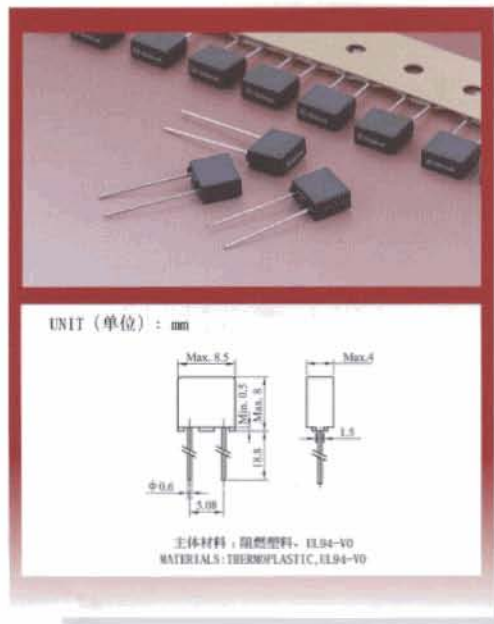
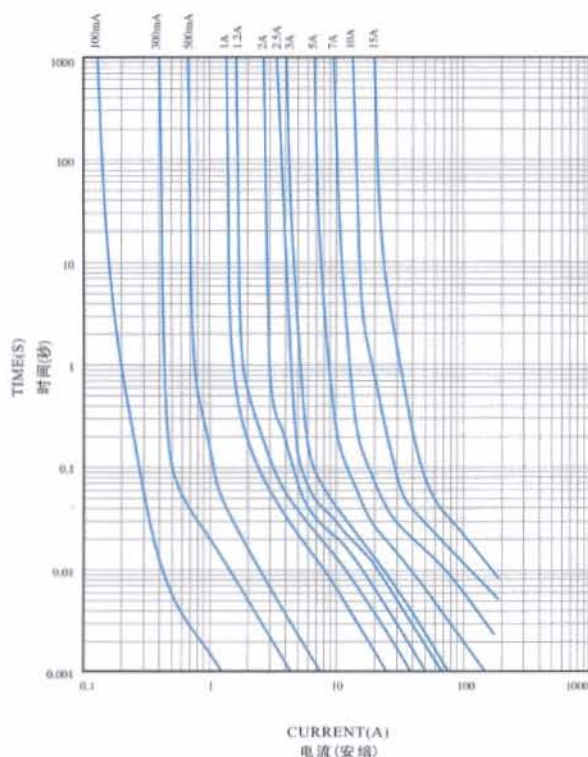


5EN

微型保险丝管(速断型)

SUB-MINIATURE FUSE-LINKS (FAST-BLOW)

I-T CHARACTERISTICS CURVE
电流-时间曲线图

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS								I ² T 参考值 REFERENCE (A ² S)
		UL			CSA			PSE		
		H ₁	H ₂	L	H ₁	H ₂	L	H ₁	L	
0100H ₁ /H ₂ /L	100mA	○	○	○	○	○	○			0.0016
0125H ₁ /H ₂ /L	125mA	○	○	○	○	○	○			0.0027
0160H ₁ /H ₂ /L	160mA	○	○	○	○	○	○			0.0045
0200H ₁ /H ₂ /L	200mA	○	○	○	○	○	○			0.0070
0250H ₁ /H ₂ /L	250mA	○	○	○	○	○	○			0.012
0300H ₁ /H ₂ /L	300mA	○	○	○	○	○	○			0.020
0315H ₁ /H ₂ /L	315mA	○	○	○	○	○	○			0.023
0350H ₁ /H ₂ /L	350mA	○	○	○	○	○	○			0.028
0375H ₁ /H ₂ /L	375mA	○	○	○	○	○	○			0.032
0400H ₁ /H ₂ /L	400mA	○	○	○	○	○	○			0.037
0500H ₁ /H ₂ /L	500mA	○	○	○	○	○	○			0.068
0600H ₁ /H ₂ /L	600mA	○	○	○	○	○	○			0.12
0630H ₁ /H ₂ /L	630mA	○	○	○	○	○	○			0.15
0700H ₁ /H ₂ /L	700mA	○	○	○	○	○	○			0.28
0750H ₁ /H ₂ /L	750mA	○	○	○	○	○	○			0.36
0800H ₁ /H ₂ /L	800mA	○	○	○	○	○	○			0.41
010H ₁ /H ₂ /L	1A	○	○	○	○	○	○	●	●	0.65
012H ₁ /H ₂ /L	1.2A	○	○	○	○	○	○	●	●	1.5
013H ₁ /H ₂ /L	1.25A	○	○	○	○	○	○	●	●	1.7
015H ₁ /H ₂ /L	1.5A	○	○	○	○	○	○	●	●	2.1
016H ₁ /H ₂ /L	1.6A	○	○	○	○	○	○	●	●	2.4
020H ₁ /H ₂ /L	2A	○	○	○	○	○	○	●	●	3.8
023H ₁ /H ₂ /L	2.25A	○	○	○	○	○	○	●	●	4.2
025H ₁ /H ₂ /L	2.5A	○	○	○	○	○	○	●	●	4.6
030H ₁ /H ₂ /L	3A	○	○	○	○	○	○	●	●	6.1
032H ₁ /H ₂ /L	3.15A	○	○	○	○	○	○	●	●	6.7
035H ₁ /H ₂ /L	3.5A	○	○	○	○	○	○	●	●	14
040H ₁ /H ₂ /L	4A	○	○	○	○	○	○	●	●	18
050H ₁ /H ₂ /L	5A	○	○	○	○	○	○	●	●	28
060H ₁ /H ₂ /L	6A	○	○	○	○	○	○	●	●	40
063H ₁ /H ₂ /L	6.3A	○	○	○	○	○	○	●	●	46
070H ₁ /H ₂ /L	7A	○	○	○	○	○	○	●	●	57
080H ₁ /H ₂ /L	8A	○	○	○	○	○	○	●	●	74
090H ₁ /H ₂ /L	9A	○	○	○	○	○	○	●	●	110
100H ₁ /H ₂ /L	10A	○	○	○	○	○	○	●	●	135
120H ₁ /H ₂ /L	12A	○	○	○	○	○	○	●	●	195
150H ₁ /H ₂ /L	15A	○	○	○	○	○	○	●	●	303

H₁ DENOTES FOR 350V (H₁表示350V)H₂ DENOTES FOR 250V (H₂表示250V)

L DENOTES FOR 125V (L表示125V)

○ DENOTES FOR PENDING (○表示申请中)

● DENOTES FOR APPROVED (●表示已取得认证)

分断电流:

INTERRUPTING RATING:

100 amperes at 125V/250V/350V AC (100mA-5A)

50 amperes at 125V/250V/350V AC (6A-15A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快4小时)
200%	60sec Max (最慢60秒)