


5RF

微型保险丝管(速断型)

SUB-MINIATURE FUSE-LINKS(QUICK-ACTING)

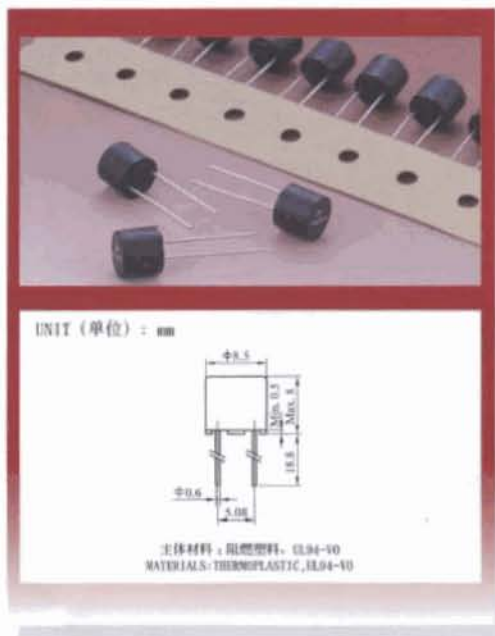


目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 MAX VOLTAGE DROP	认证 APPROVALS						I ² t 参考值 REFERENCE (A ² .S)
			CCC	SEMKO	VDE	UR	CSA	PSE	
0050H	50mA	850	○	○	○	○	○	0.0012	
0063H	63mA	750	○	○	○	○	○	0.0012	
0080H	80mA	650	○	○	○	○	○	0.0021	
0100H	100mA	600	○	○	○	○	○	0.0032	
0125H	125mA	550	○	○	○	○	○	0.0063	
0160H	160mA	500	○	○	○	○	○	0.011	
0200H	200mA	480	○	○	○	○	○	0.017	
0250H	250mA	440	○	○	○	○	○	0.030	
0315H	315mA	400	○	○	○	○	○	0.049	
0400H	400mA	370	○	○	○	○	○	0.08	
0500H	500mA	350	○	○	○	○	○	0.13	
0630H	630mA	320	○	○	○	○	○	0.16	
0750H	750mA	320	○	○	○	○	○	0.18	
8000H	800mA	300	○	○	○	○	○	0.21	
010H	1A	280	○	○	○	○	●	0.37	
013H	1.25A	280	○	○	○	○	○	0.60	
016H	1.6A	250	○	○	○	○	○	1.3	
020H	2A	240	○	○	○	○	○	2.1	
025H	2.5A	200	○	○	○	○	○	3.1	
032H	3.15A	180	○	○	○	○	○	5.5	
040H	4A	160	○	○	○	○	○	9.4	
050H	5A	160	○	○	○	○	○	17	
063H	6.3A	160	○	○	○	○	○	29	

H DENOTES FOR 250V (H表示250V)

○ DENOTES FOR PENDING (○表示申请中)

● DENOTES FOR APPROVED (●表示已取得认证)

I-T CHARACTERISTICS CURVE
电流-时间曲线图

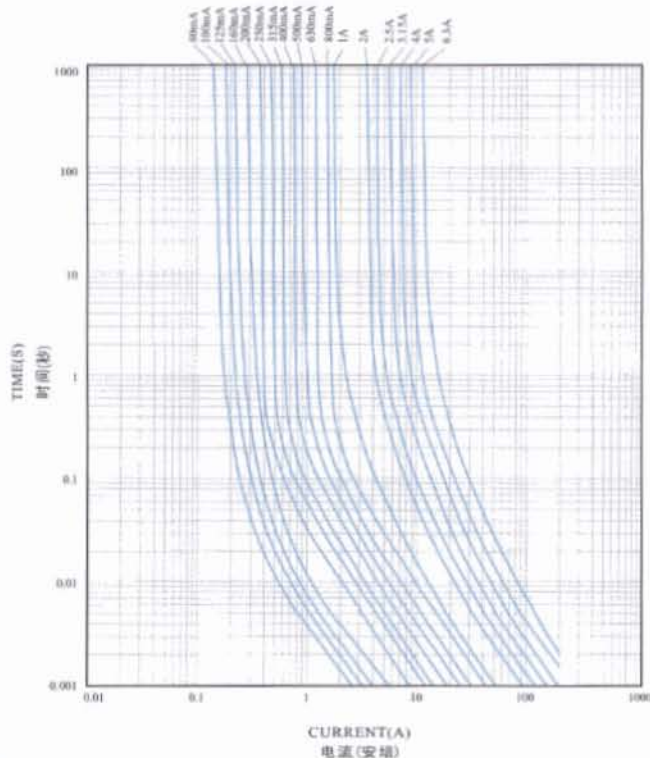

分断电流:

BREAKING CAPACITY:

CCC/SEMKO/VDE: 35A OR 10I_n WHICHEVER IS GREATER
UR/CSA/PSE: 100A 250V AC

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1I _n	Max (最慢)	30min
	Min (最快)	10ms
2.75I _n	Max (最慢)	3sec
	Min (最快)	3ms
4I _n	Max (最慢)	300ms
	Min (最快)	20ms