


5RT

微型保险丝管(延时型)

SUB-MINIATURE FUSE-LINKS(TIME-LAG)

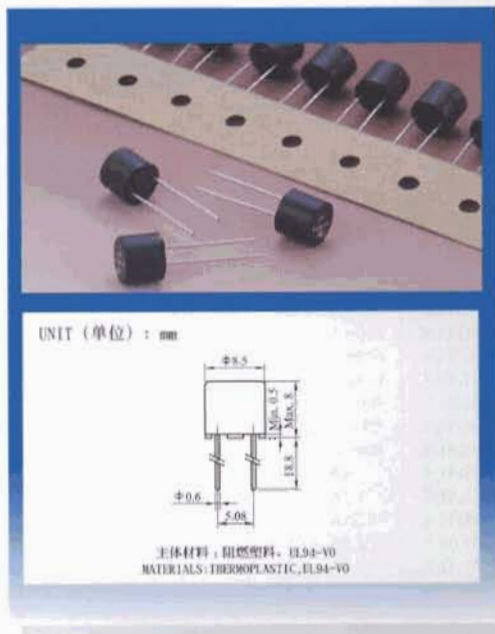


目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS						I ² T 参考值 REFERENCE (A ² S)
			CCC	SEMKO	VDE	UR	CSA	PSE	
0063H	63mA	480		○	○	○	○		0.01
0080H	80mA	400		○	○	○	○		0.01
0100H	100mA	350	●	○	○	○	○		0.02
0125H	125mA	300		○	○	○	○		0.04
0160H	160mA	280		○	○	○	○		0.08
0200H	200mA	260	●	○	○	○	○		0.12
0250H	250mA	240	●	○	○	○	○		0.40
0315H	315mA	220	●	○	○	○	○		0.61
0400H	400mA	200		○	○	○	○		1.03
0500H	500mA	190	●	○	○	○	○		1.62
0630H	630mA	180	●	○	○	○	○		2.48
0800H	800mA	160	●	○	○	○	○		3.65
010H	1A	140	●	○	○	○	○	●	6.07
013H	1.25A	130	●	○	○	○	○	●	10.06
016H	1.6A	120	●	○	○	○	○	●	16
020H	2A	100	●	○	○	○	○	●	23.6
025H	2.5A	100	●	○	○	○	○	●	38
032H	3.15A	100	●	○	○	○	○	●	60
040H	4A	100	●	○	○	○	○	●	95
050H	5A	100	●	○	○	○	○	●	152
063H	6.3A	100	●	○	○	○	○	●	248

H DENOTES FOR 250V (H表示250V)

○ DENOTES FOR PENDING (○表示申请中)

● DENOTES FOR APPROVED (●表示已取得认证)

I-T CHARACTERISTICS CURVE
电流-时间曲线图

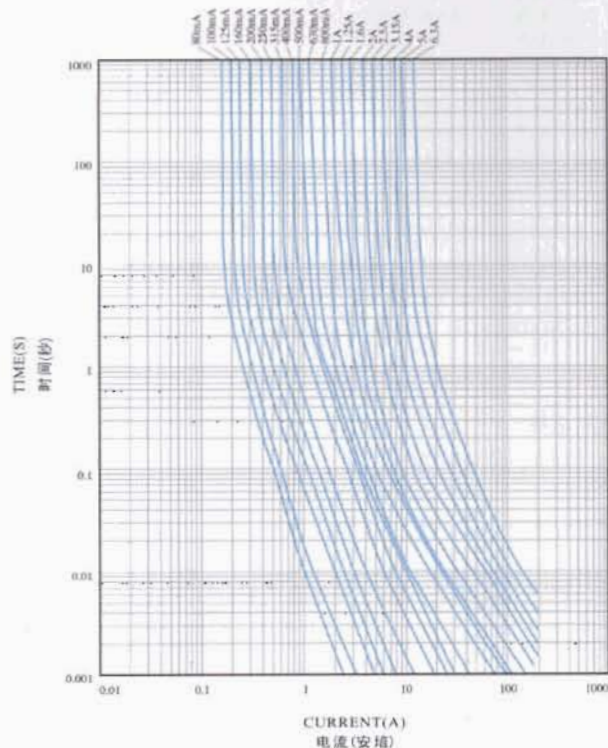

分断电流:

BREAKING CAPACITY:

CCC/SEMKO/VDE: 35A OR 10In WHICHEVER IS GREATER

UR/CSA/PSE: 100A 250V AC

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max (最慢)	2min
	Min (最快)	400ms
2.75In	Max (最慢)	10sec
	Min (最快)	150ms
4In	Max (最慢)	3sec
	Min (最快)	20ms
10In	Max (最慢)	150ms
	Min (最快)	