



61MS,62MS 6.35 $\phi$  × 32

GLASS TUBE FUSE (MEDIUM SLOW-BLOW)

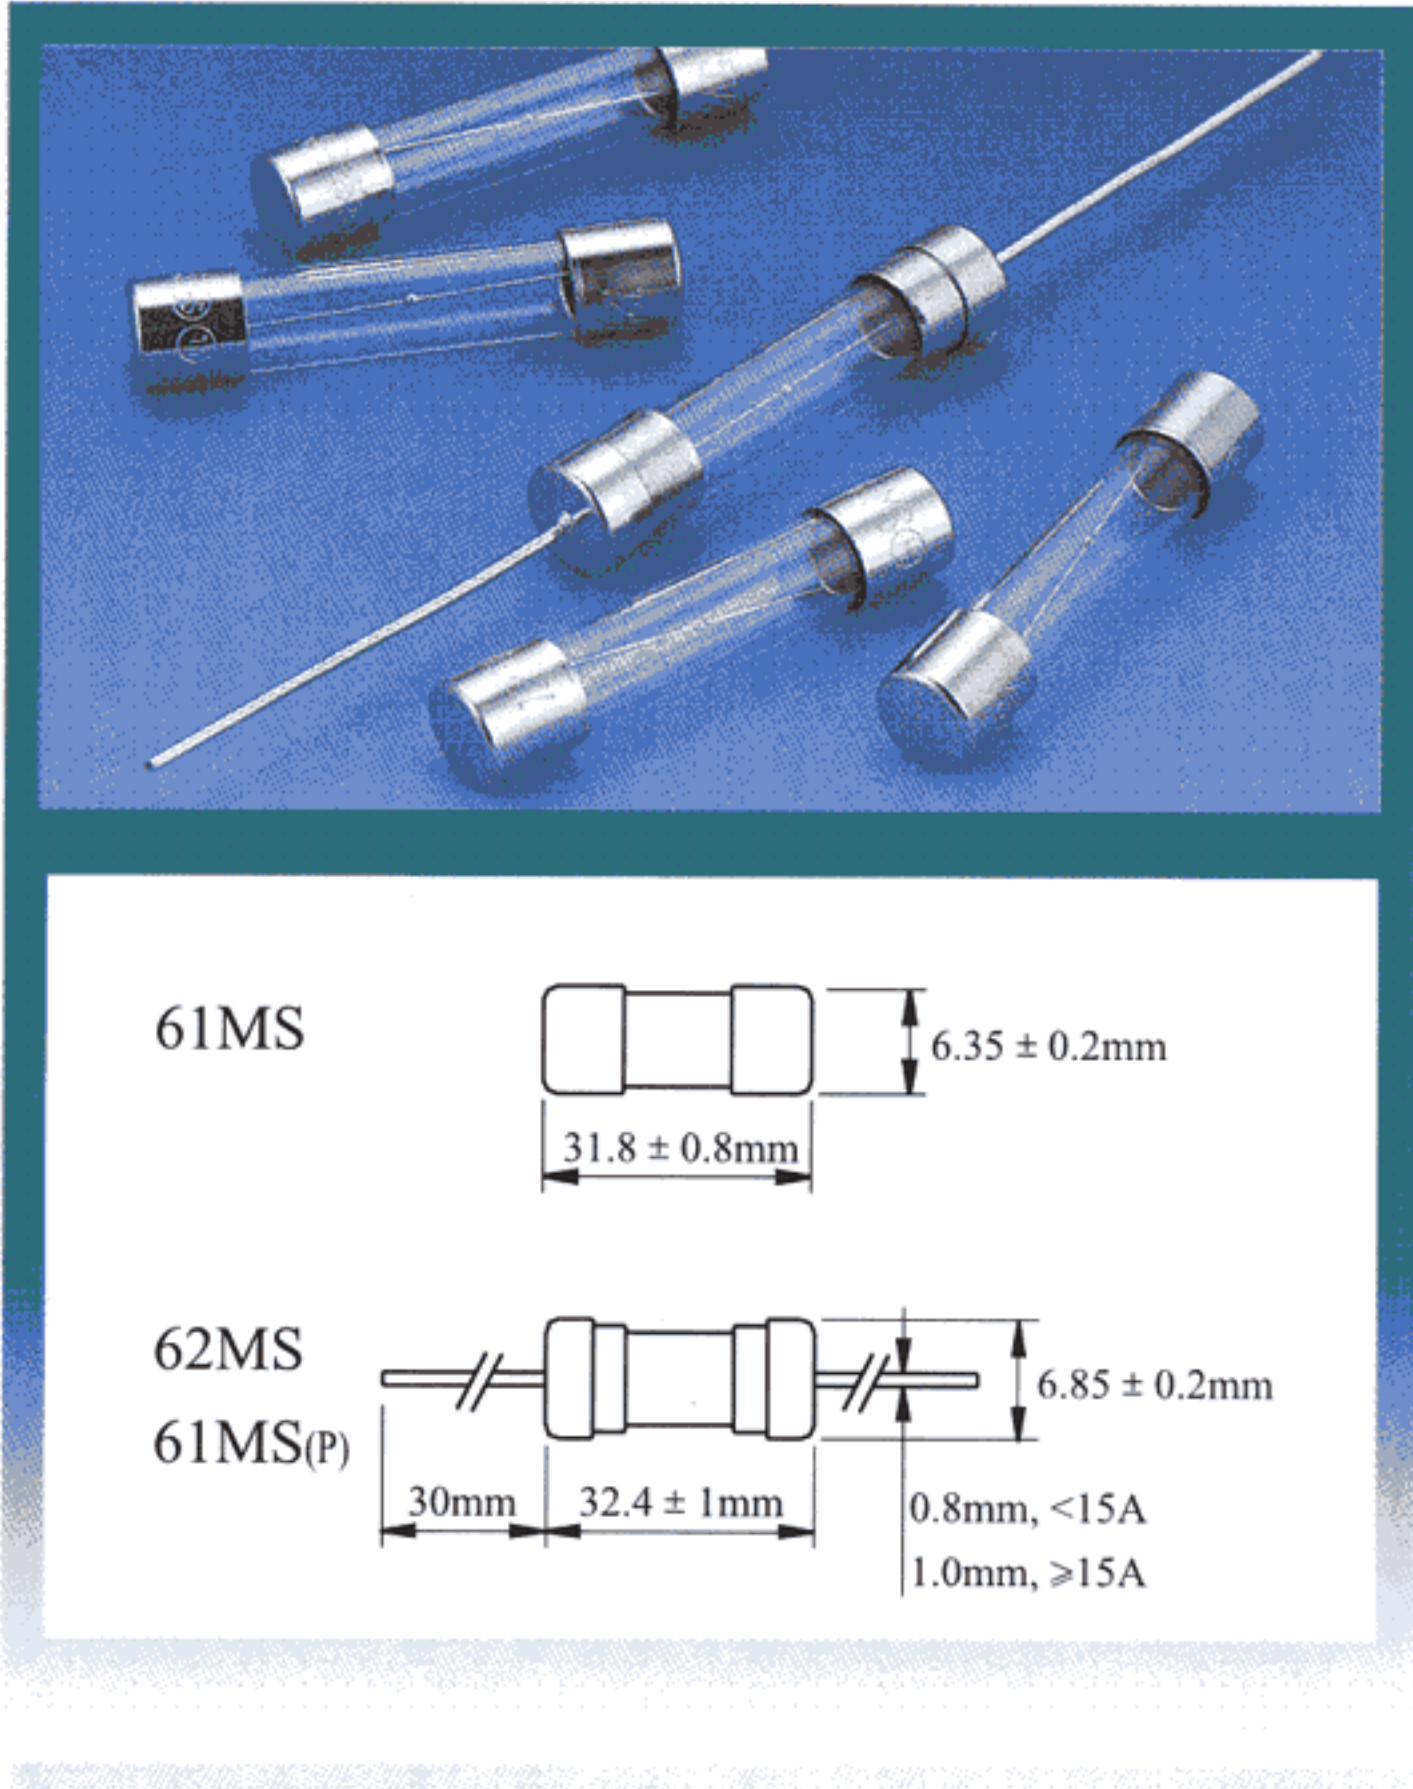

I-T CHARACTERISTICS CURVE

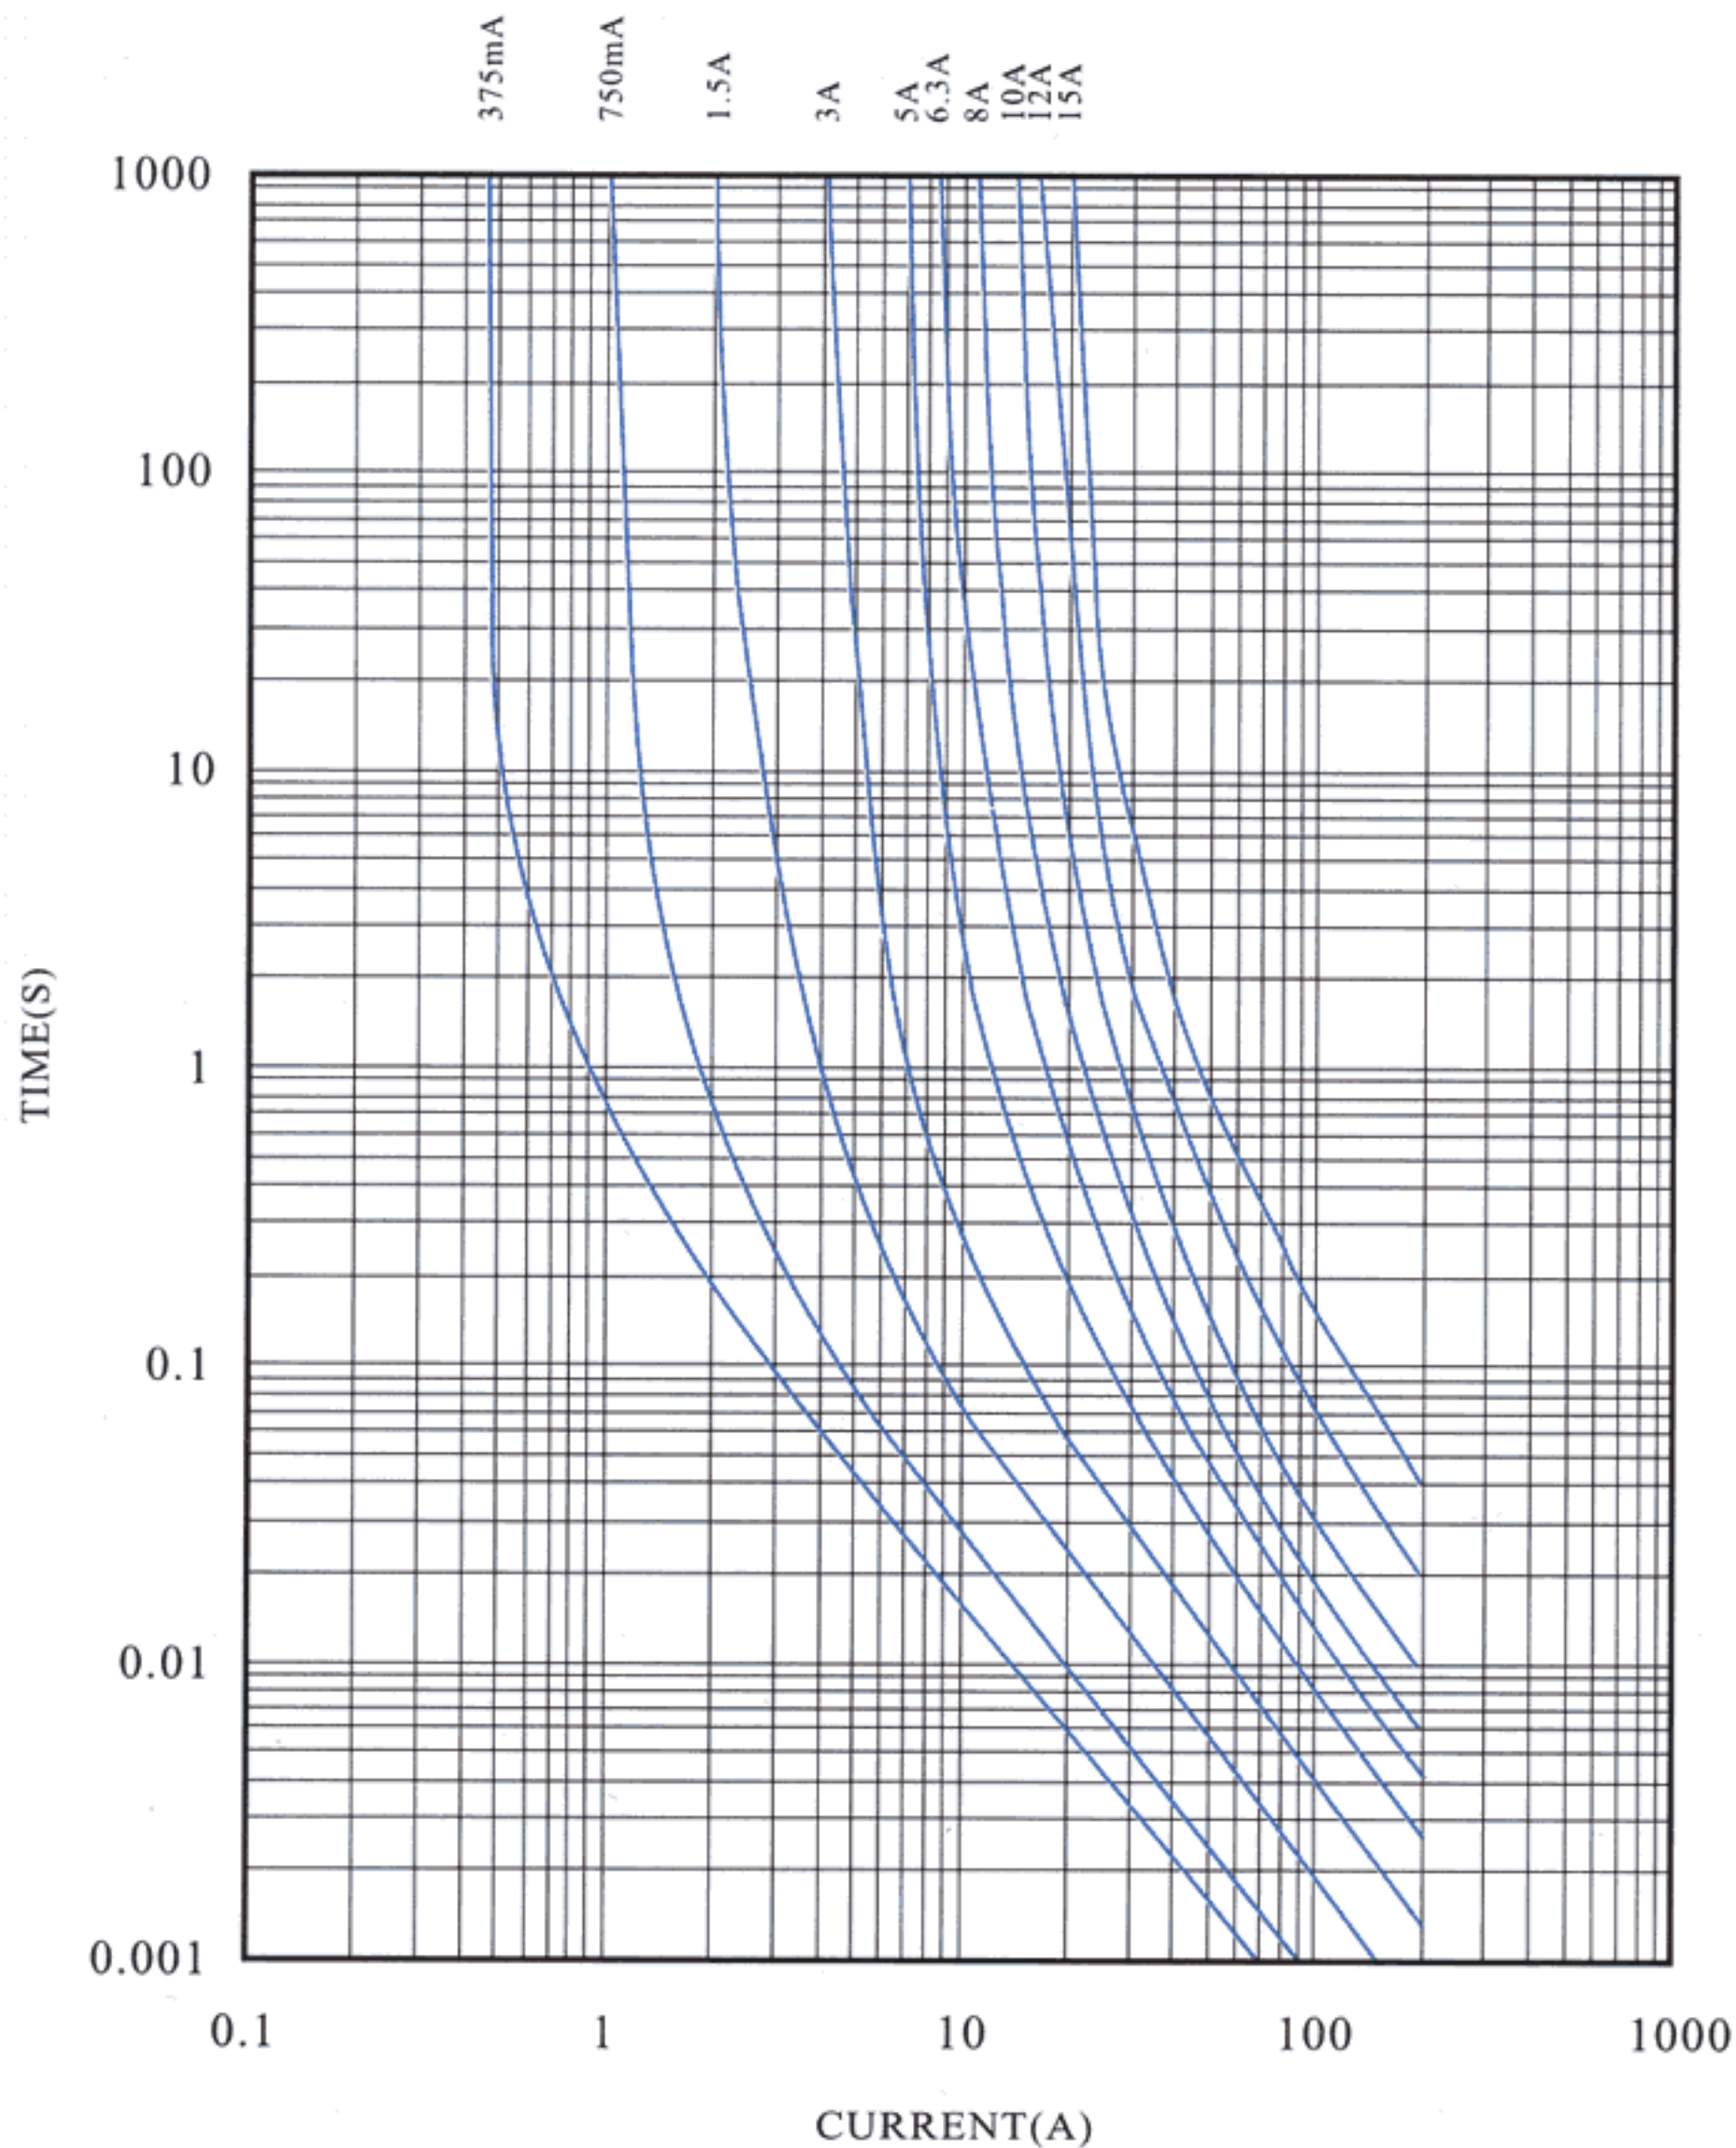

CATALOG NO.	AMPERE RATING	APPROVALS								I <sup>2</sup> T REFERENCE (A <sup>2</sup> .S)
		UL		CSA		PSE		KTL		
		H	L	H	L	H	L	H		
0100H/L	100mA	●	●	●	●			●	0.0032	
0125H/L	125mA	●	●	●	●			●	0.0049	
0150H/L	150mA	●	●	●	●			●	0.0070	
0160H/L	160mA	●	●	●	●			●	0.0080	
0200H/L	200mA	●	●	●	●			●	0.013	
0250H/L	250mA	●	●	●	●			●	0.32	
0300H/L	300mA	●	●	●	●			●	0.46	
0315H/L	315mA	●	●	●	●			●	0.50	
0350H/L	350mA	●	●	●	●			●	0.62	
0375H/L	375mA	●	●	●	●			●	0.71	
0400H/L	400mA	●	●	●	●			●	0.81	
0500H/L	500mA	●	●	●	●			●	1.4	
0600H/L	600mA	●	●	●	●			●	2.0	
0630H/L	630mA	●	●	●	●			●	2.3	
0700H/L	700mA	●	●	●	●			●	2.8	
0750H/L	750mA	●	●	●	●			●	3.2	
0800H/L	800mA	●	●	●	●			●	3.6	
010H/L	1A	●	●	●	●	●	●	●	5.7	
012H/L	1.2A	●	●	●	●	●	●	●	8.2	
013H/L	1.25A	●	●	●	●	●	●	●	8.9	
015H/L	1.5A	●	●	●	●	●	●	●	13	
016H/L	1.6A	●	●	●	●	●	●	●	17	
020H/L	2A		●	●	●	●	●	●	27	
025H/L	2.5A		●	●	●	●	●	●	30	
030H/L	3A		●	●	●	●	●	●	36	
032H/L	3.15A		●	●	●	●	●	●	40	
035H/L	3.5A		●	●	●	●	●	●	50	
040H/L	4A		●	●	●	●	●	●	79	
050H/L	5A		●	●	●	●	●	●	111	
060H/L	6A					●	●	●	130	
063H/L	6.3A					●	●	●	137	
070H/L	7A					●	●	●	155	
080H/L	8A					●	●	●	233	
090H/L	9A					●	●	●	279	
100H/L	10A					●	●	●	304	
120H/L	12A					●	●	●	438	
150H/L	15A					●	●	●	684	

H DENOTES FOR 250V  
 L DENOTES FOR 125V  
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:  
 10,000 amperes at 125V AC  
 35 amperes at 250V AC (100mA-1A)  
 100 amperes at 250V AC (1.2A-3.5A)  
 100 amperes at 250V AC (4A-5A)  
 500 amperes at 125V AC (1A-15A) PSE  
 100 amperes at 250V AC (100mA-15A) PSE,KTL

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	20 sec Max