



61S,62S 6.35^φ × 32

GLASS TUBE FUSE (SLOW-BLOW)

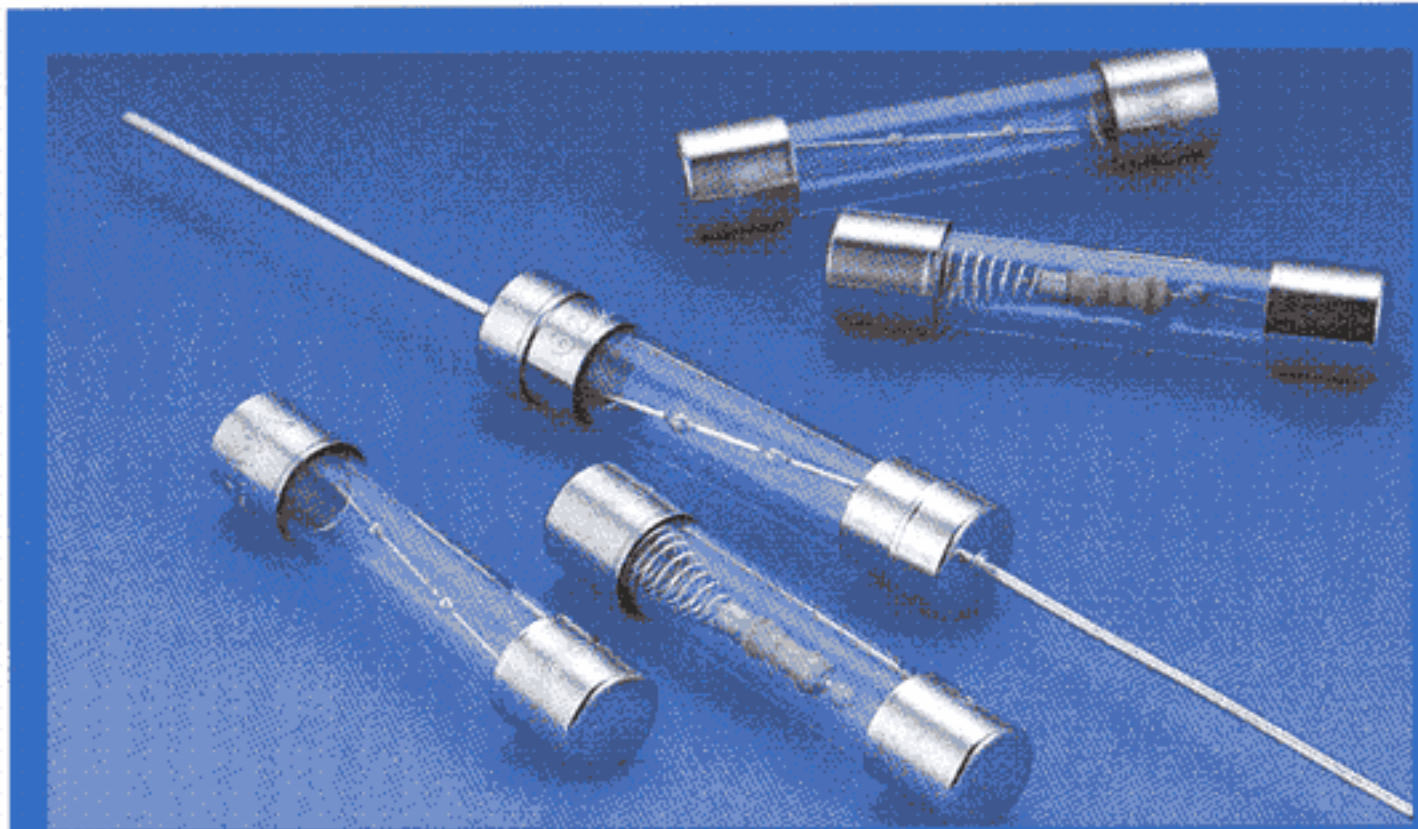


61S

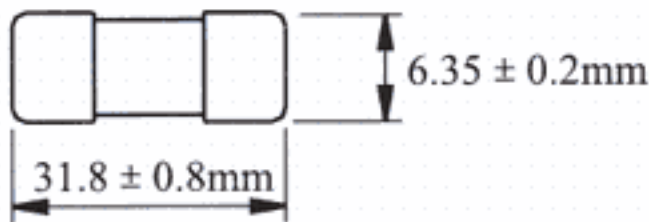


62S

61S(P)

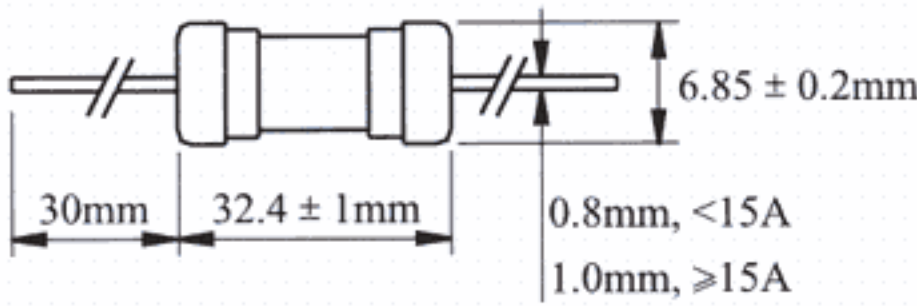

I-T CHARACTERISTICS CURVE

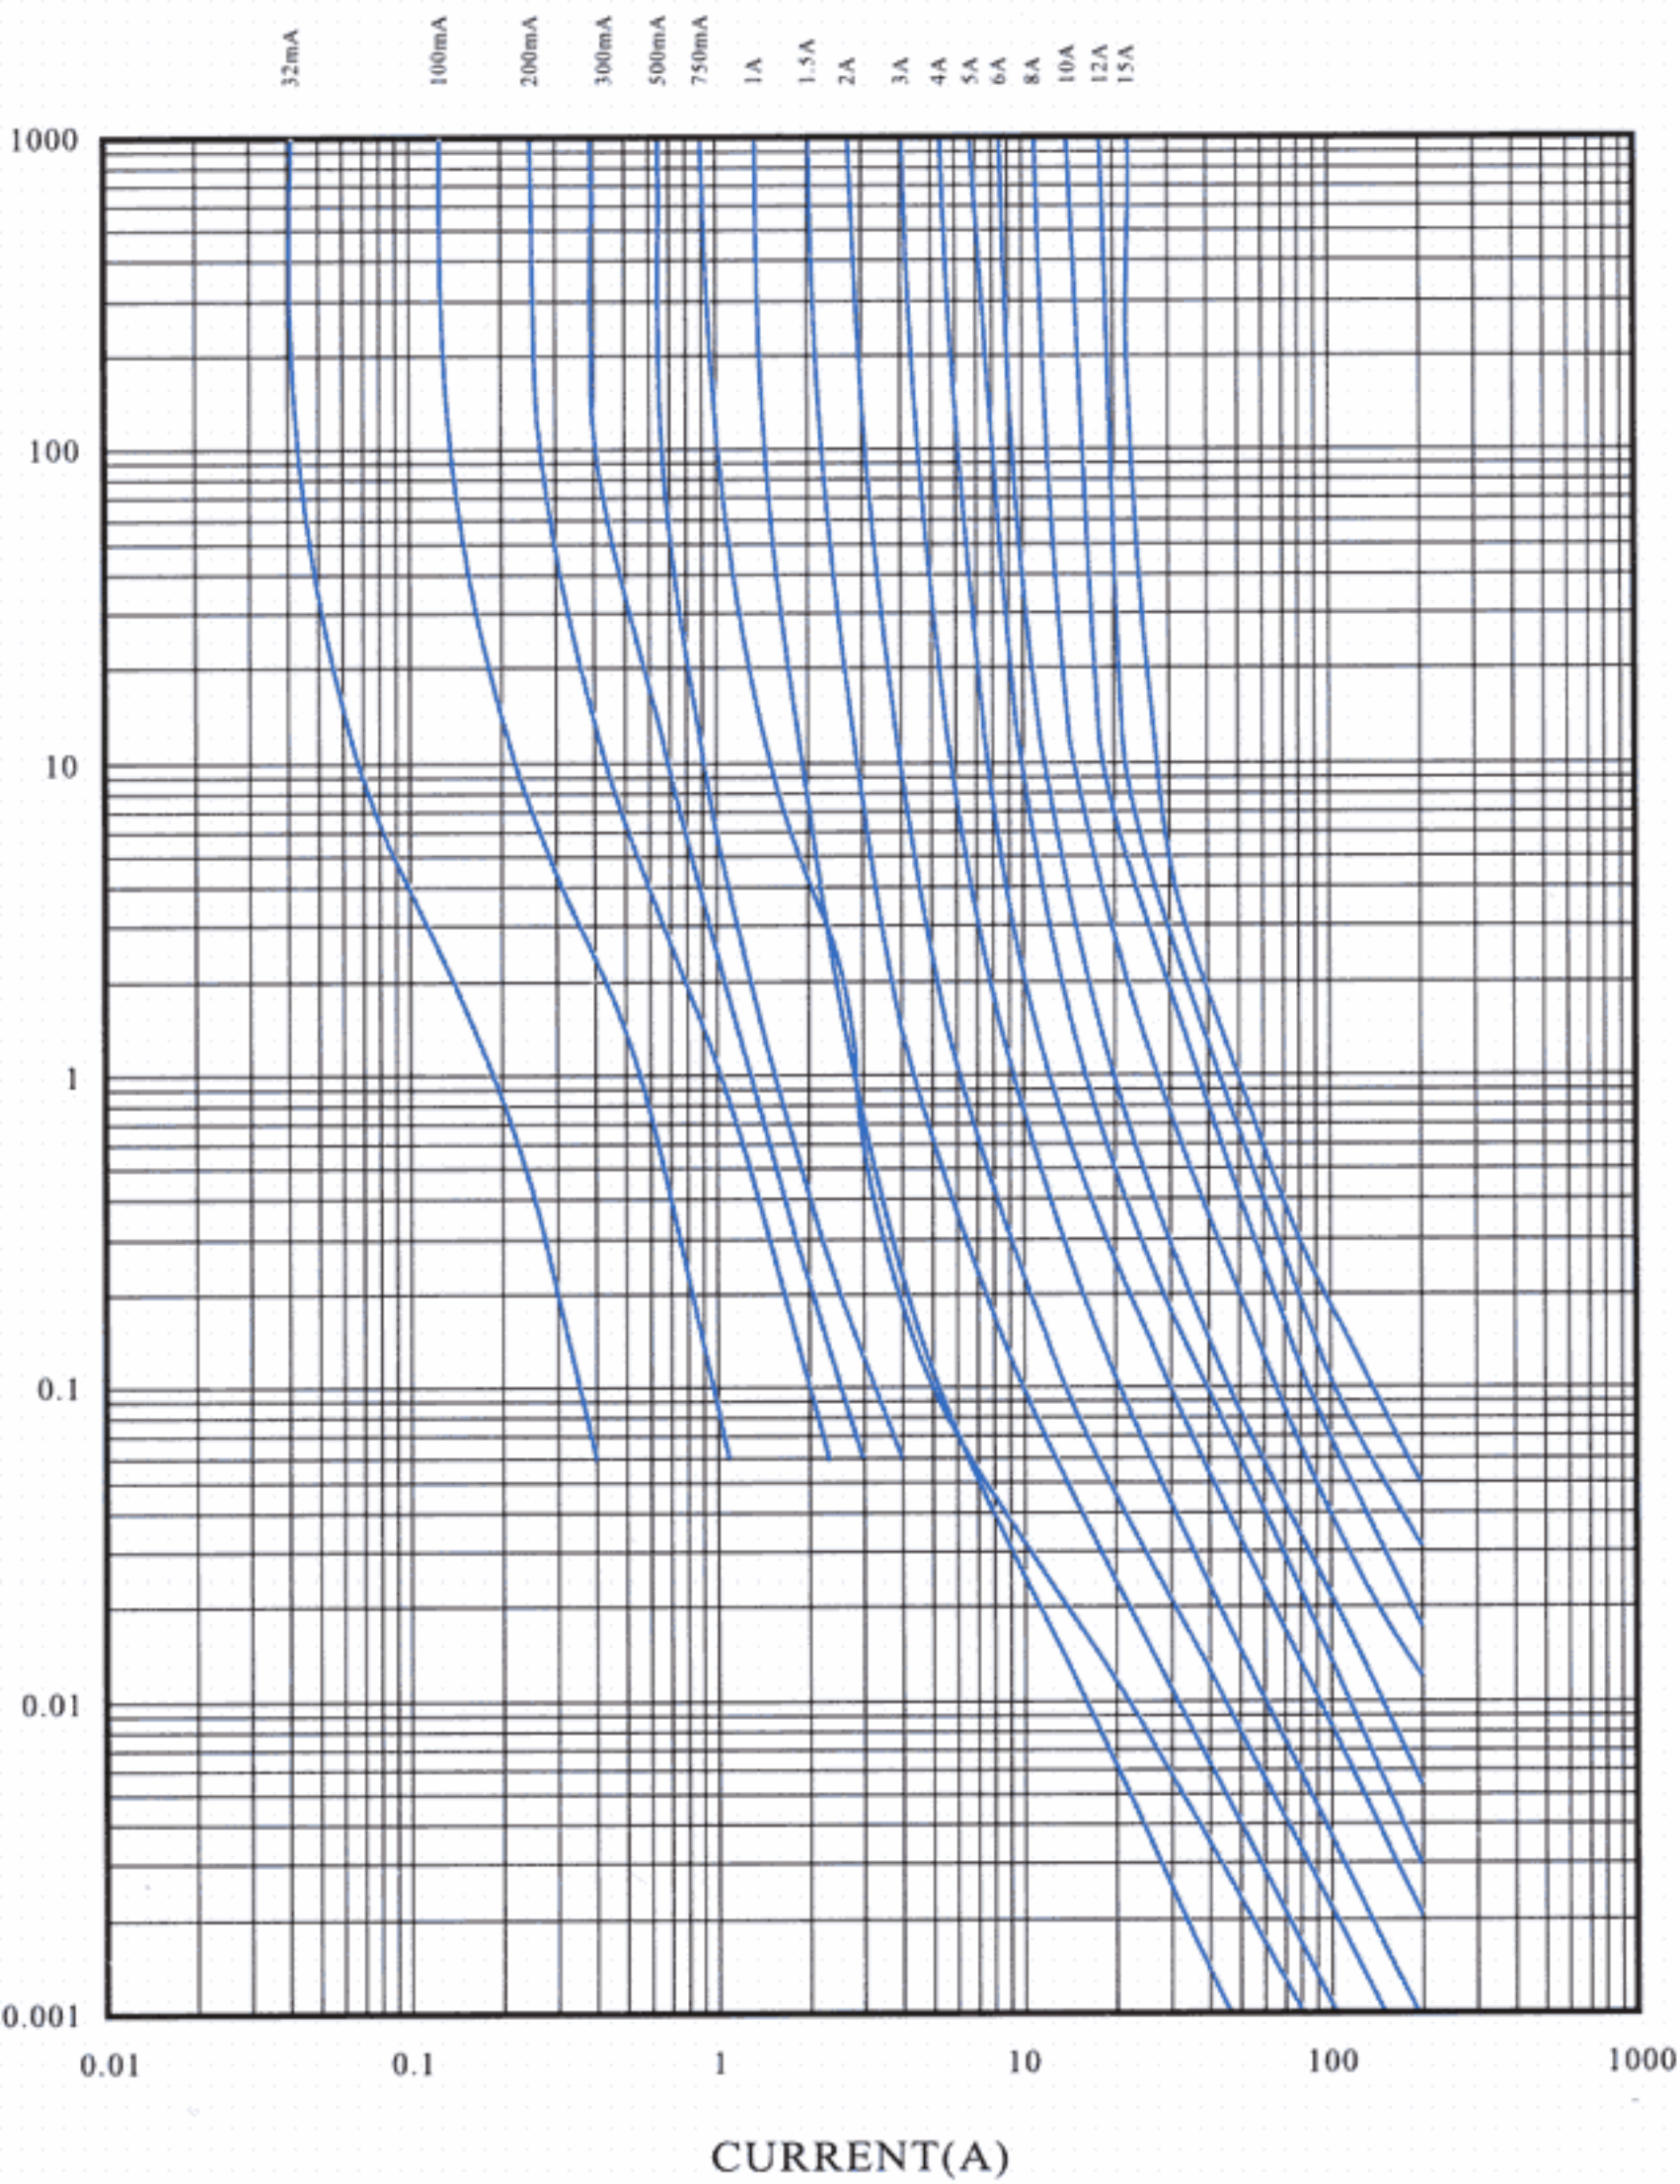

CATALOG NO.	AMPERE RATING	APPROVALS							I ² T
		UL		CSA		PSE		KTL	REFERENCE (A ² .S)
		H	L	H	L	H	L	H	
0032H/L	32mA	●	●	●	●			●	0.0037
0050H/L	50mA	●	●	●	●			●	0.0090
0063H/L	63mA	●	●	●	●			●	0.0013
0080H/L	80mA	●	●	●	●			●	0.021
0100H/L	100mA	●	●	●	●			●	0.033
0125H/L	125mA	●	●	●	●			●	0.052
0150H/L	150mA	●	●	●	●			●	0.075
0160H/L	160mA	●	●	●	●			●	0.085
0200H/L	200mA	●	●	●	●			●	0.13
0250H/L	250mA	●	●	●	●			●	0.17
0300H/L	300mA	●	●	●	●			●	0.24
0315H/L	315mA	●	●	●	●			●	0.26
0350H/L	350mA	●	●	●	●			●	0.32
0400H/L	400mA	●	●	●	●			●	0.41
0500H/L	500mA	●	●	●	●			●	0.64
0600H/L	600mA	●	●	●	●			●	0.92
0630H/L	630mA	●	●	●	●			●	1.0
0750H/L	750mA	●	●	●	●			●	1.3
0800H/L	800mA	●	●	●	●			●	1.6
010H/L	1A	●	●	●	●	●	●	●	2.3
012H/L	1.2A	●	●	●	●	●	●	●	6.0
013H/L	1.25A	●	●	●	●	●	●	●	6.6
015H/L	1.5A	●	●	●	●	●	●	●	9.5
016H/L	1.6A	●	●	●	●	●	●	●	14
020H/L	2A	●	●	●	●	●	●	●	27
025H/L	2.5A	●	●	●	●	●	●	●	52
030H/L	3A	●	●	●	●	●	●	●	66
032H/L	3.15A	●	●	●	●	●	●	●	77
035H/L	3.5A	●	●	●	●	●	●	●	99
040H/L	4A	●	●	●	●	●	●	●	140
050H/L	5A	●	●	●	●	●	●	●	157
060H/L	6A					●	●	●	182
063H/L	6.3A					●	●	●	210
070H/L	7A					●	●	●	302
080H/L	8A					●	●	●	416
090H/L	9A					●	●	●	528
100H/L	10A					●	●	●	646
120H/L	12A					●	●	●	960
150H/L	15A					●	●	●	1551

H DENOTES FOR 250V

L DENOTES FOR 125V

● DENOTES FOR APPROVED

INTERRUPTING RATING:

10,000 amperes at 125V AC (32mA-5A)

35 amperes at 250V AC (32mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-5A)

500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (100mA-15A) PSE,KTL

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	120 sec Max