



61ST,62ST 6.35 $\phi$  × 32

GLASS TUBE FUSE ( MEDIUM SLOW-BLOW)

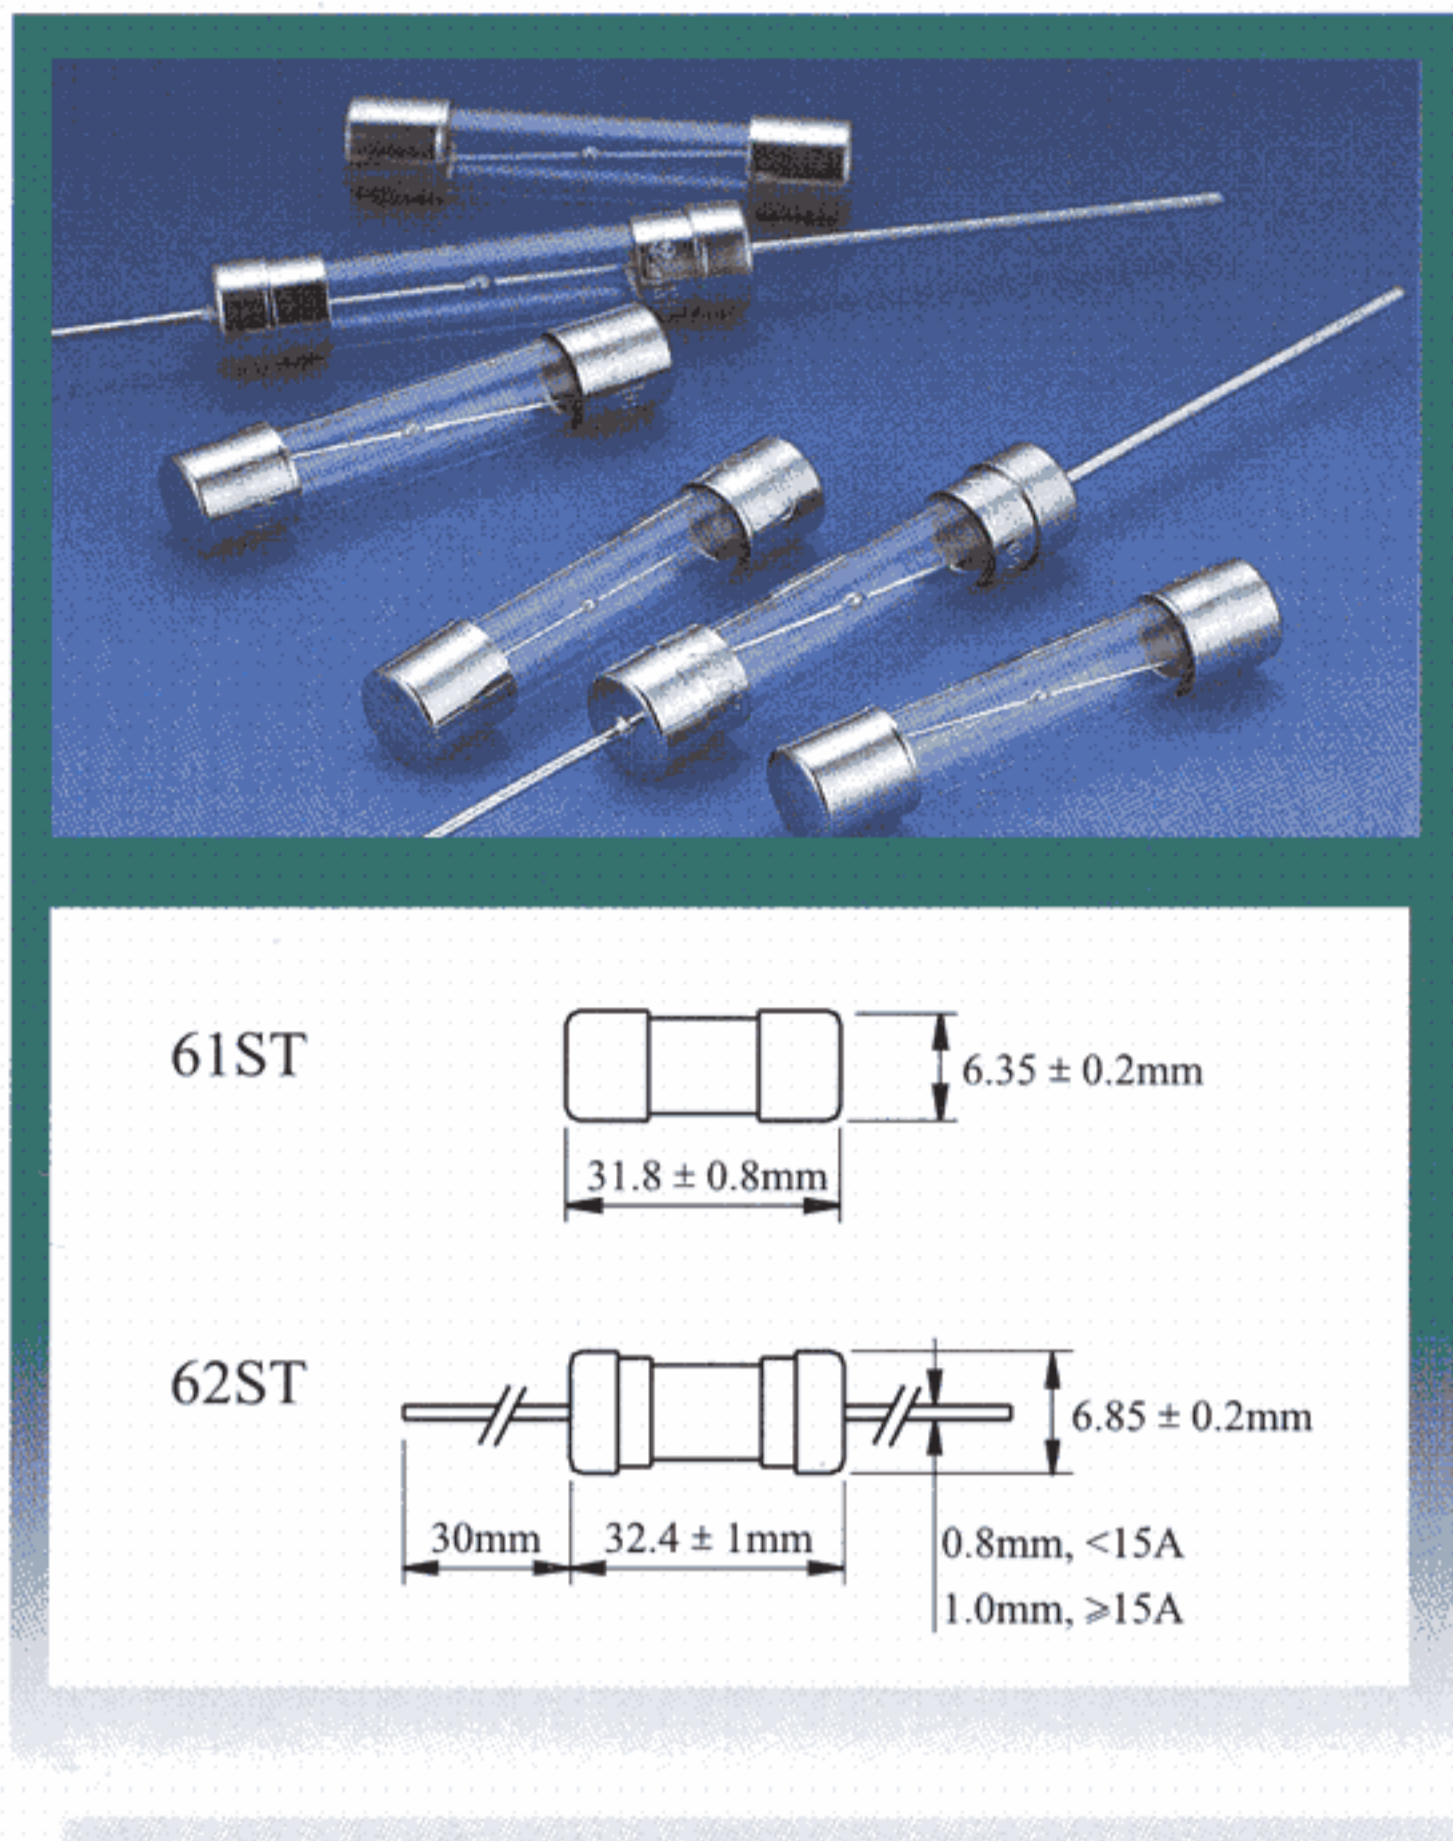

I-T CHARACTERISTICS CURVE

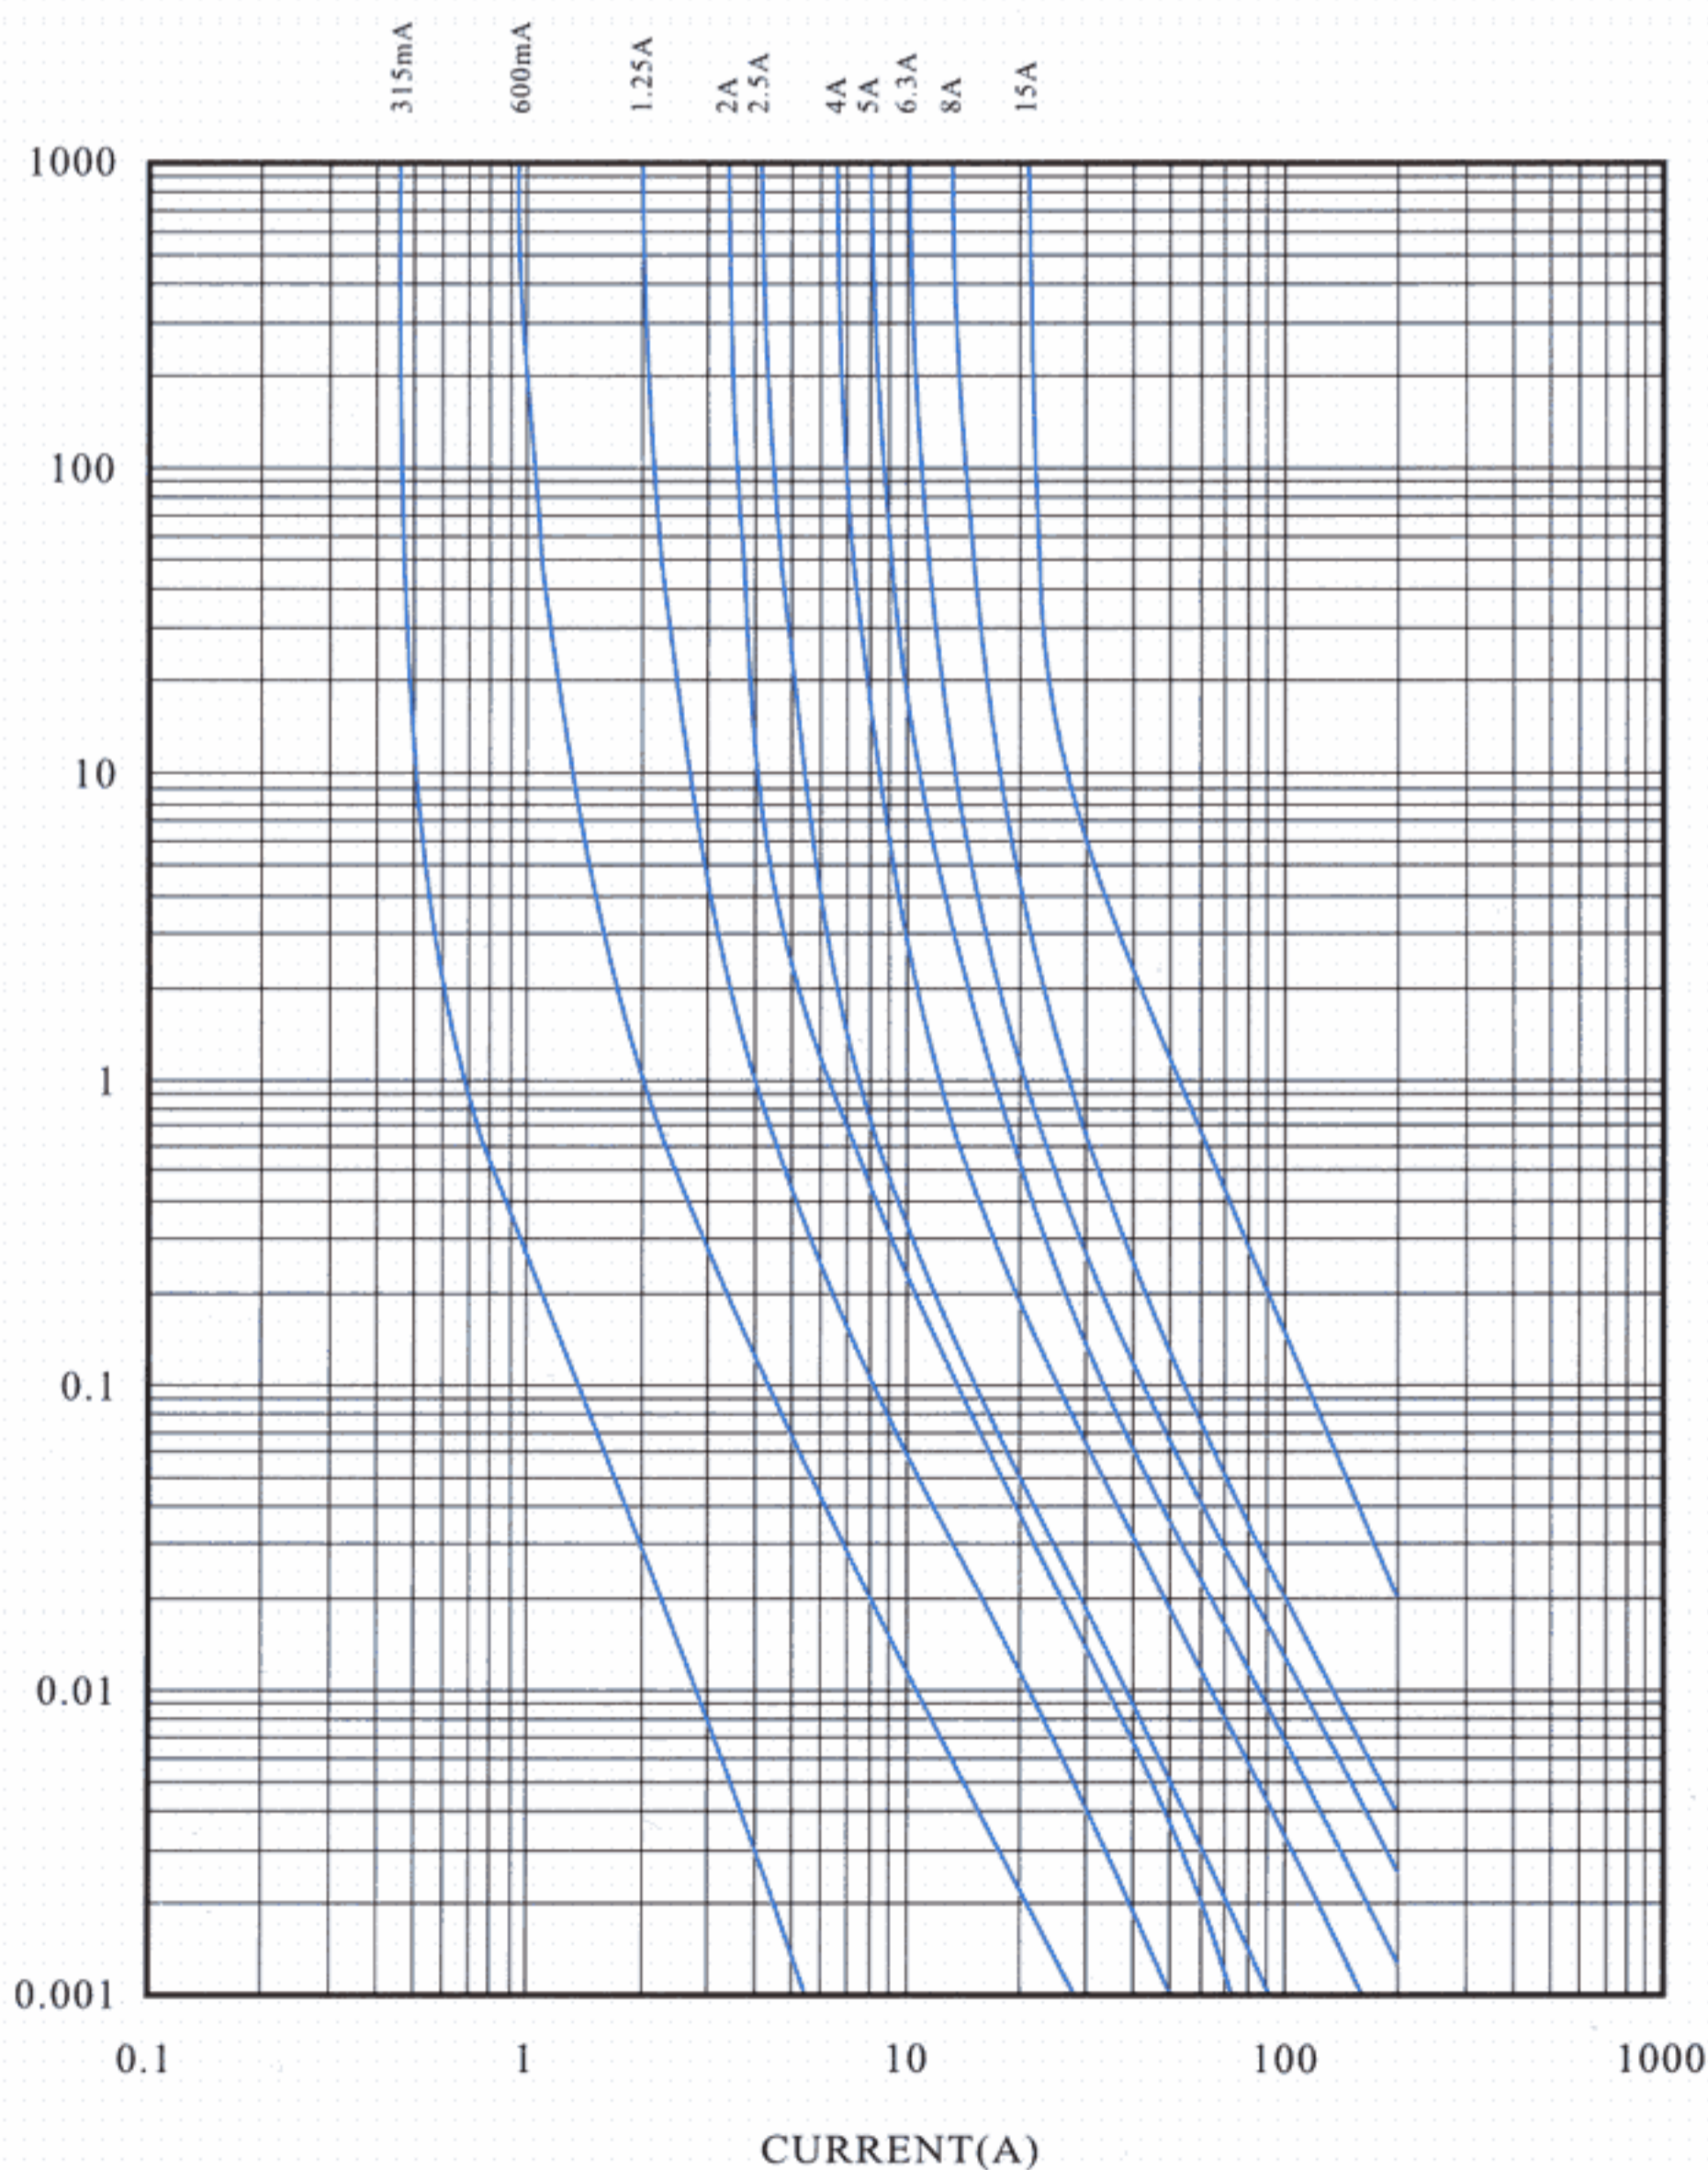

| CATALOG NO. | AMPERE RATING | APPROVALS |   | I <sup>2</sup> T REFERENCE (A <sup>2</sup> .S) |
|-------------|---------------|-----------|---|--|
|             |               | PSE       |   |  |
|             |               | H         | L |  |
| 0100H/L     | 100mA         |           |   | 0.016  |
| 0125H/L     | 125mA         |           |   | 0.023  |
| 0150H/L     | 150mA         |           |   | 0.051  |
| 0160H/L     | 160mA         |           |   | 0.054  |
| 0200H/L     | 200mA         |           |   | 0.072  |
| 0250H/L     | 250mA         |           |   | 0.13   |
| 0300H/L     | 300mA         |           |   | 0.19   |
| 0315H/L     | 315mA         |           |   | 0.26   |
| 0350H/L     | 350mA         |           |   | 0.30   |
| 0375H/L     | 375mA         |           |   | 0.37   |
| 0400H/L     | 400mA         |           |   | 0.47   |
| 0500H/L     | 500mA         |           |   | 0.71   |
| 0600H/L     | 600mA         |           |   | 1.0  |
| 0630H/L     | 630mA         |           |   | 1.2  |
| 0700H/L     | 700mA         |           |   | 1.9  |
| 0750H/L     | 750mA         |           |   | 2.3  |
| 0800H/L     | 800mA         |           |   | 3.3  |
| 010H/L      | 1A            | ●         | ● | 6.5  |
| 012H/L      | 1.2A          | ●         | ● | 8.2  |
| 013H/L      | 1.25A         | ●         | ● | 9.8  |
| 015H/L      | 1.5A          | ●         | ● | 15   |
| 016H/L      | 1.6A          | ●         | ● | 17   |
| 020H/L      | 2A            | ●         | ● | 35   |
| 025H/L      | 2.5A          | ●         | ● | 57   |
| 030H/L      | 3A            | ●         | ● | 70   |
| 032H/L      | 3.15A         | ●         | ● | 78   |
| 035H/L      | 3.5A          | ●         | ● | 99   |
| 040H/L      | 4A            | ●         | ● | 109  |
| 050H/L      | 5A            | ●         | ● | 137  |
| 060H/L      | 6A            | ●         | ● | 190  |
| 063H/L      | 6.3A          | ●         | ● | 210  |
| 070H/L      | 7A            | ●         | ● | 259  |
| 080H/L      | 8A            | ●         | ● | 320  |
| 090H/L      | 9A            | ●         | ● | 427  |
| 100H/L      | 10A           | ●         | ● | 618  |
| 120H/L      | 12A           | ●         | ● | 934  |
| 150H/L      | 15A           | ●         | ● | 1467   |

H DENOTES FOR 250V  
 L DENOTES FOR 125V  
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:  
 500 amperes at 125V AC (1A-15A) PSE  
 100 amperes at 250V AC (1A-15A) PSE

ELECTRICAL CHARACTERISTICS:

| RATING | BLOWING TIME |
|--------|--------------|
| 130%   | 1 hour Min   |
| 160%   | 1 hour Max   |
| 200%   | 120 sec Max  |