


61T 6.35 ϕ ×32

玻璃保险丝管(延时型) GLASS TUBE FUSE (TIME-LAG)

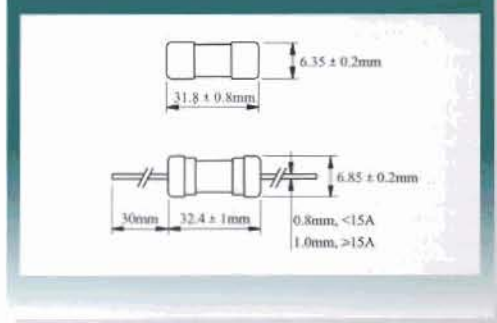


目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS	I ² T 参考值 REFERENCE (A ² S)	
			CCC		
080H	8A	100	●	455	
100H	10A		●	706	
120H	12A		●	1020	
130H	13A				1190
150H	15A		●	1590	
160H	16A				1810
170H	17A				2040
180H	18A				2288
200H	20A		●	2820	
250H	25A				4410
300H	30A				6350
400H	40A				11300

H DENOTES FOR 250V (H表示250V)

● DENOTES FOR APPROVED (●表示已取得认证)

I-T CHARACTERISTICS CURVE
电流-时间曲线图

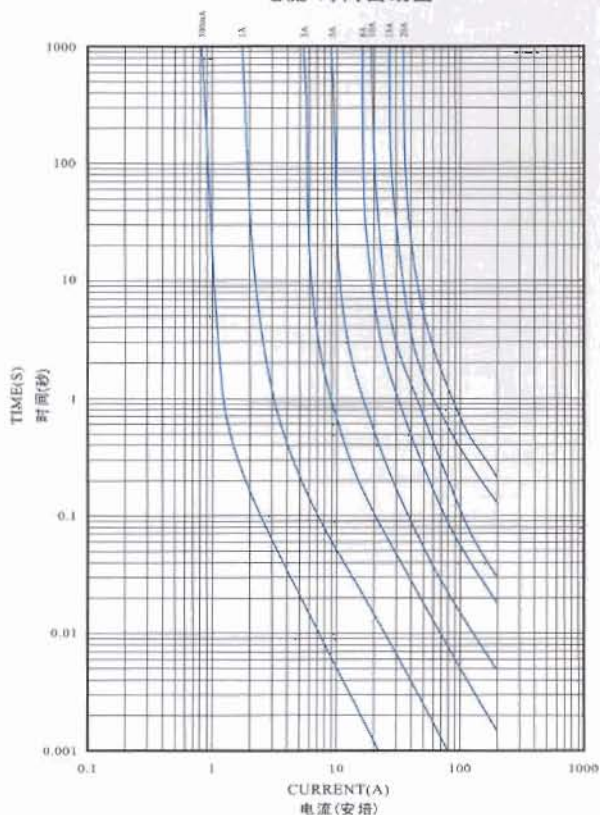

分断电流:

BREAKING CAPACITY:

100 amperes at 250V AC (8A-40A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING	熔断时间 BLOWING TIME
2.1In	Max(最慢) 30min
2.75In	Min(最快) 200ms
	Max(最慢) 10sec
4In	Min(最快) 40ms
	Max(最慢) 3sec
10In	Min(最快) 10ms
	Max(最慢) 300ms