



61MS,62MS 6.35 ϕ × 32

GLASS TUBE FUSE (MEDIUM SLOW-BLOW)

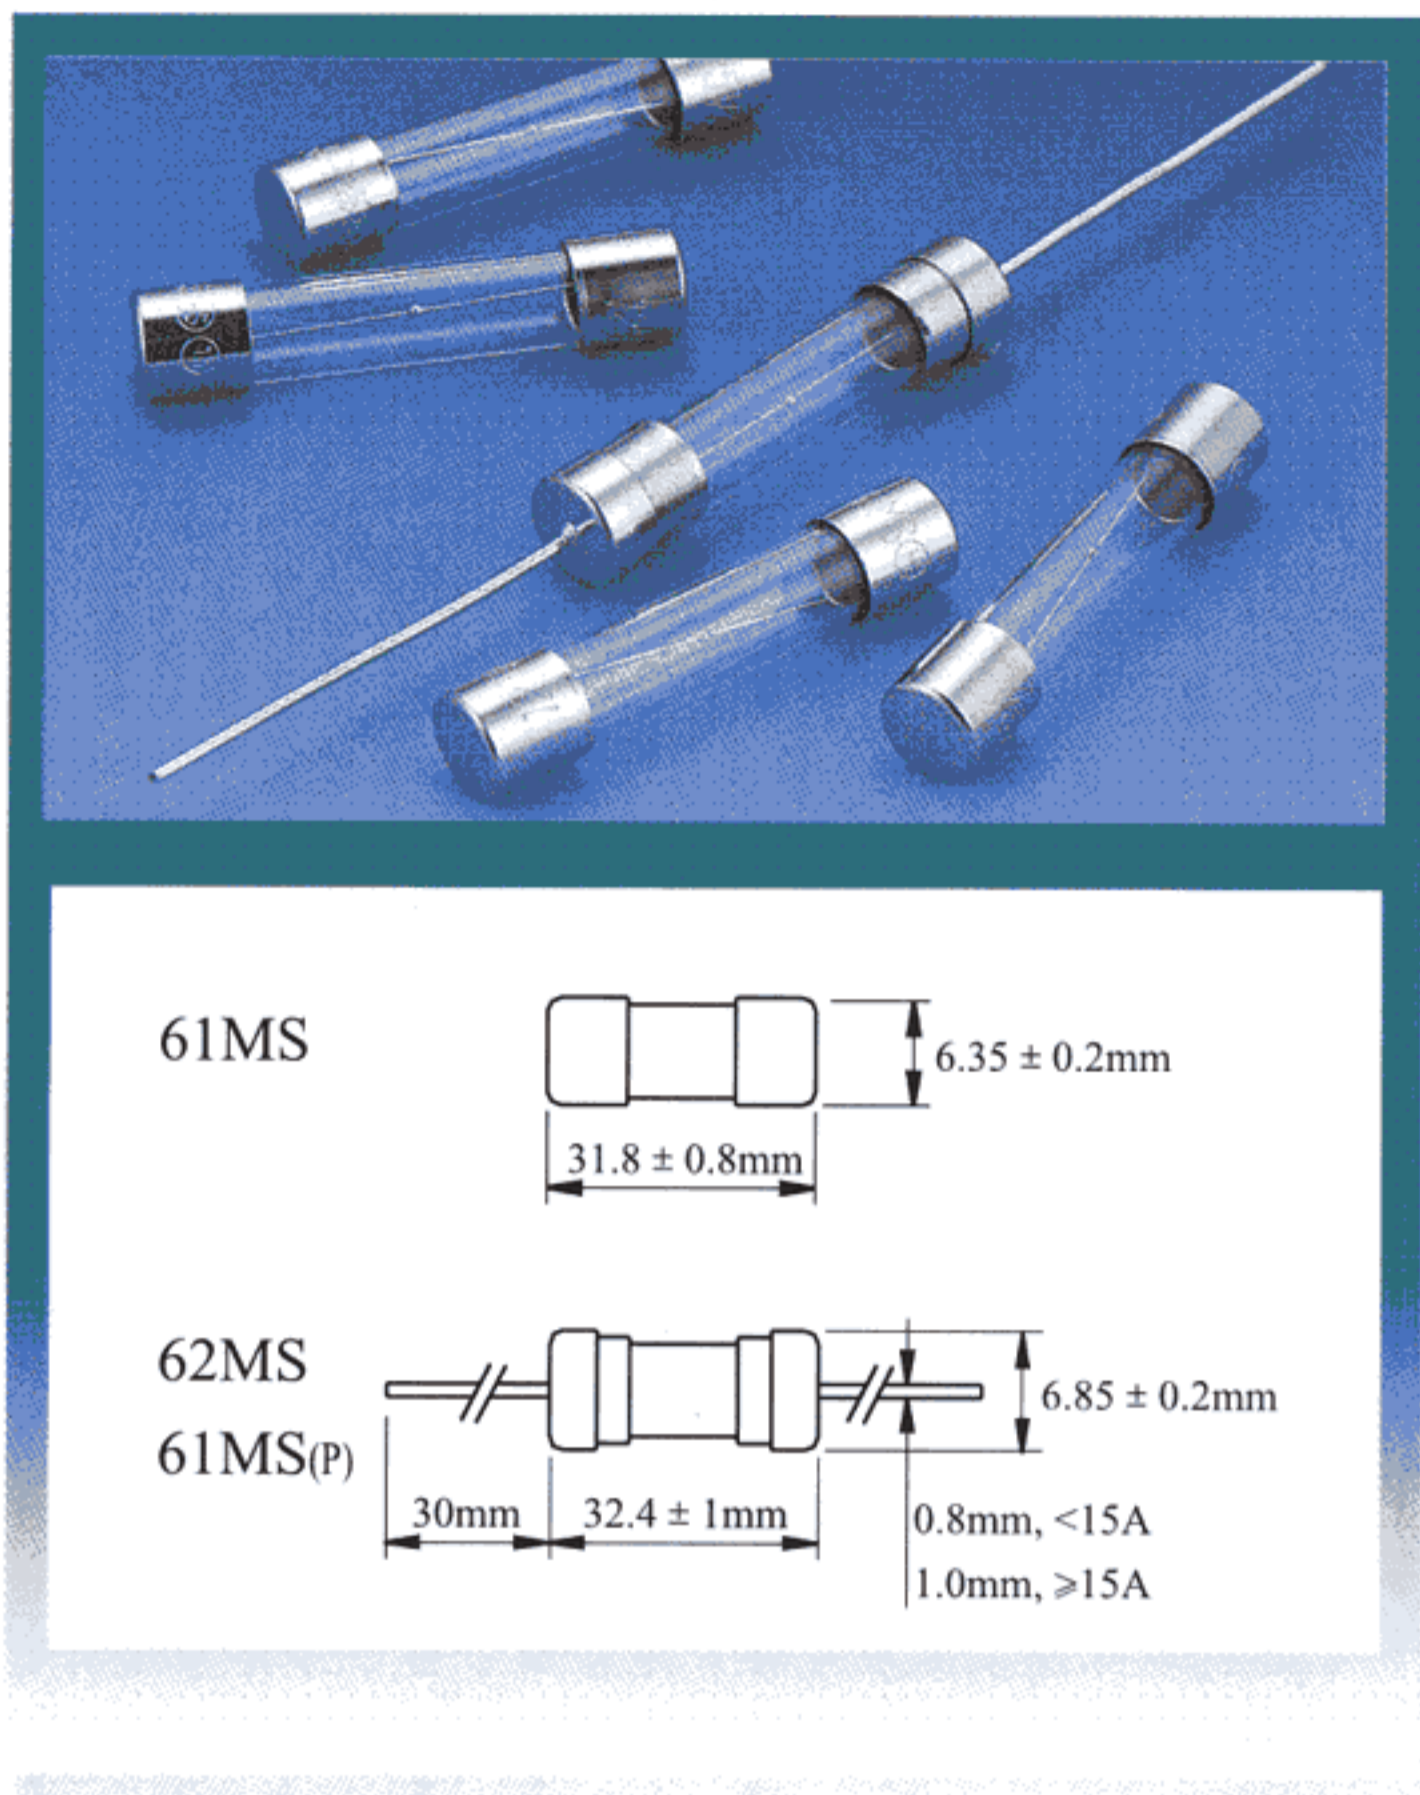

I-T CHARACTERISTICS CURVE

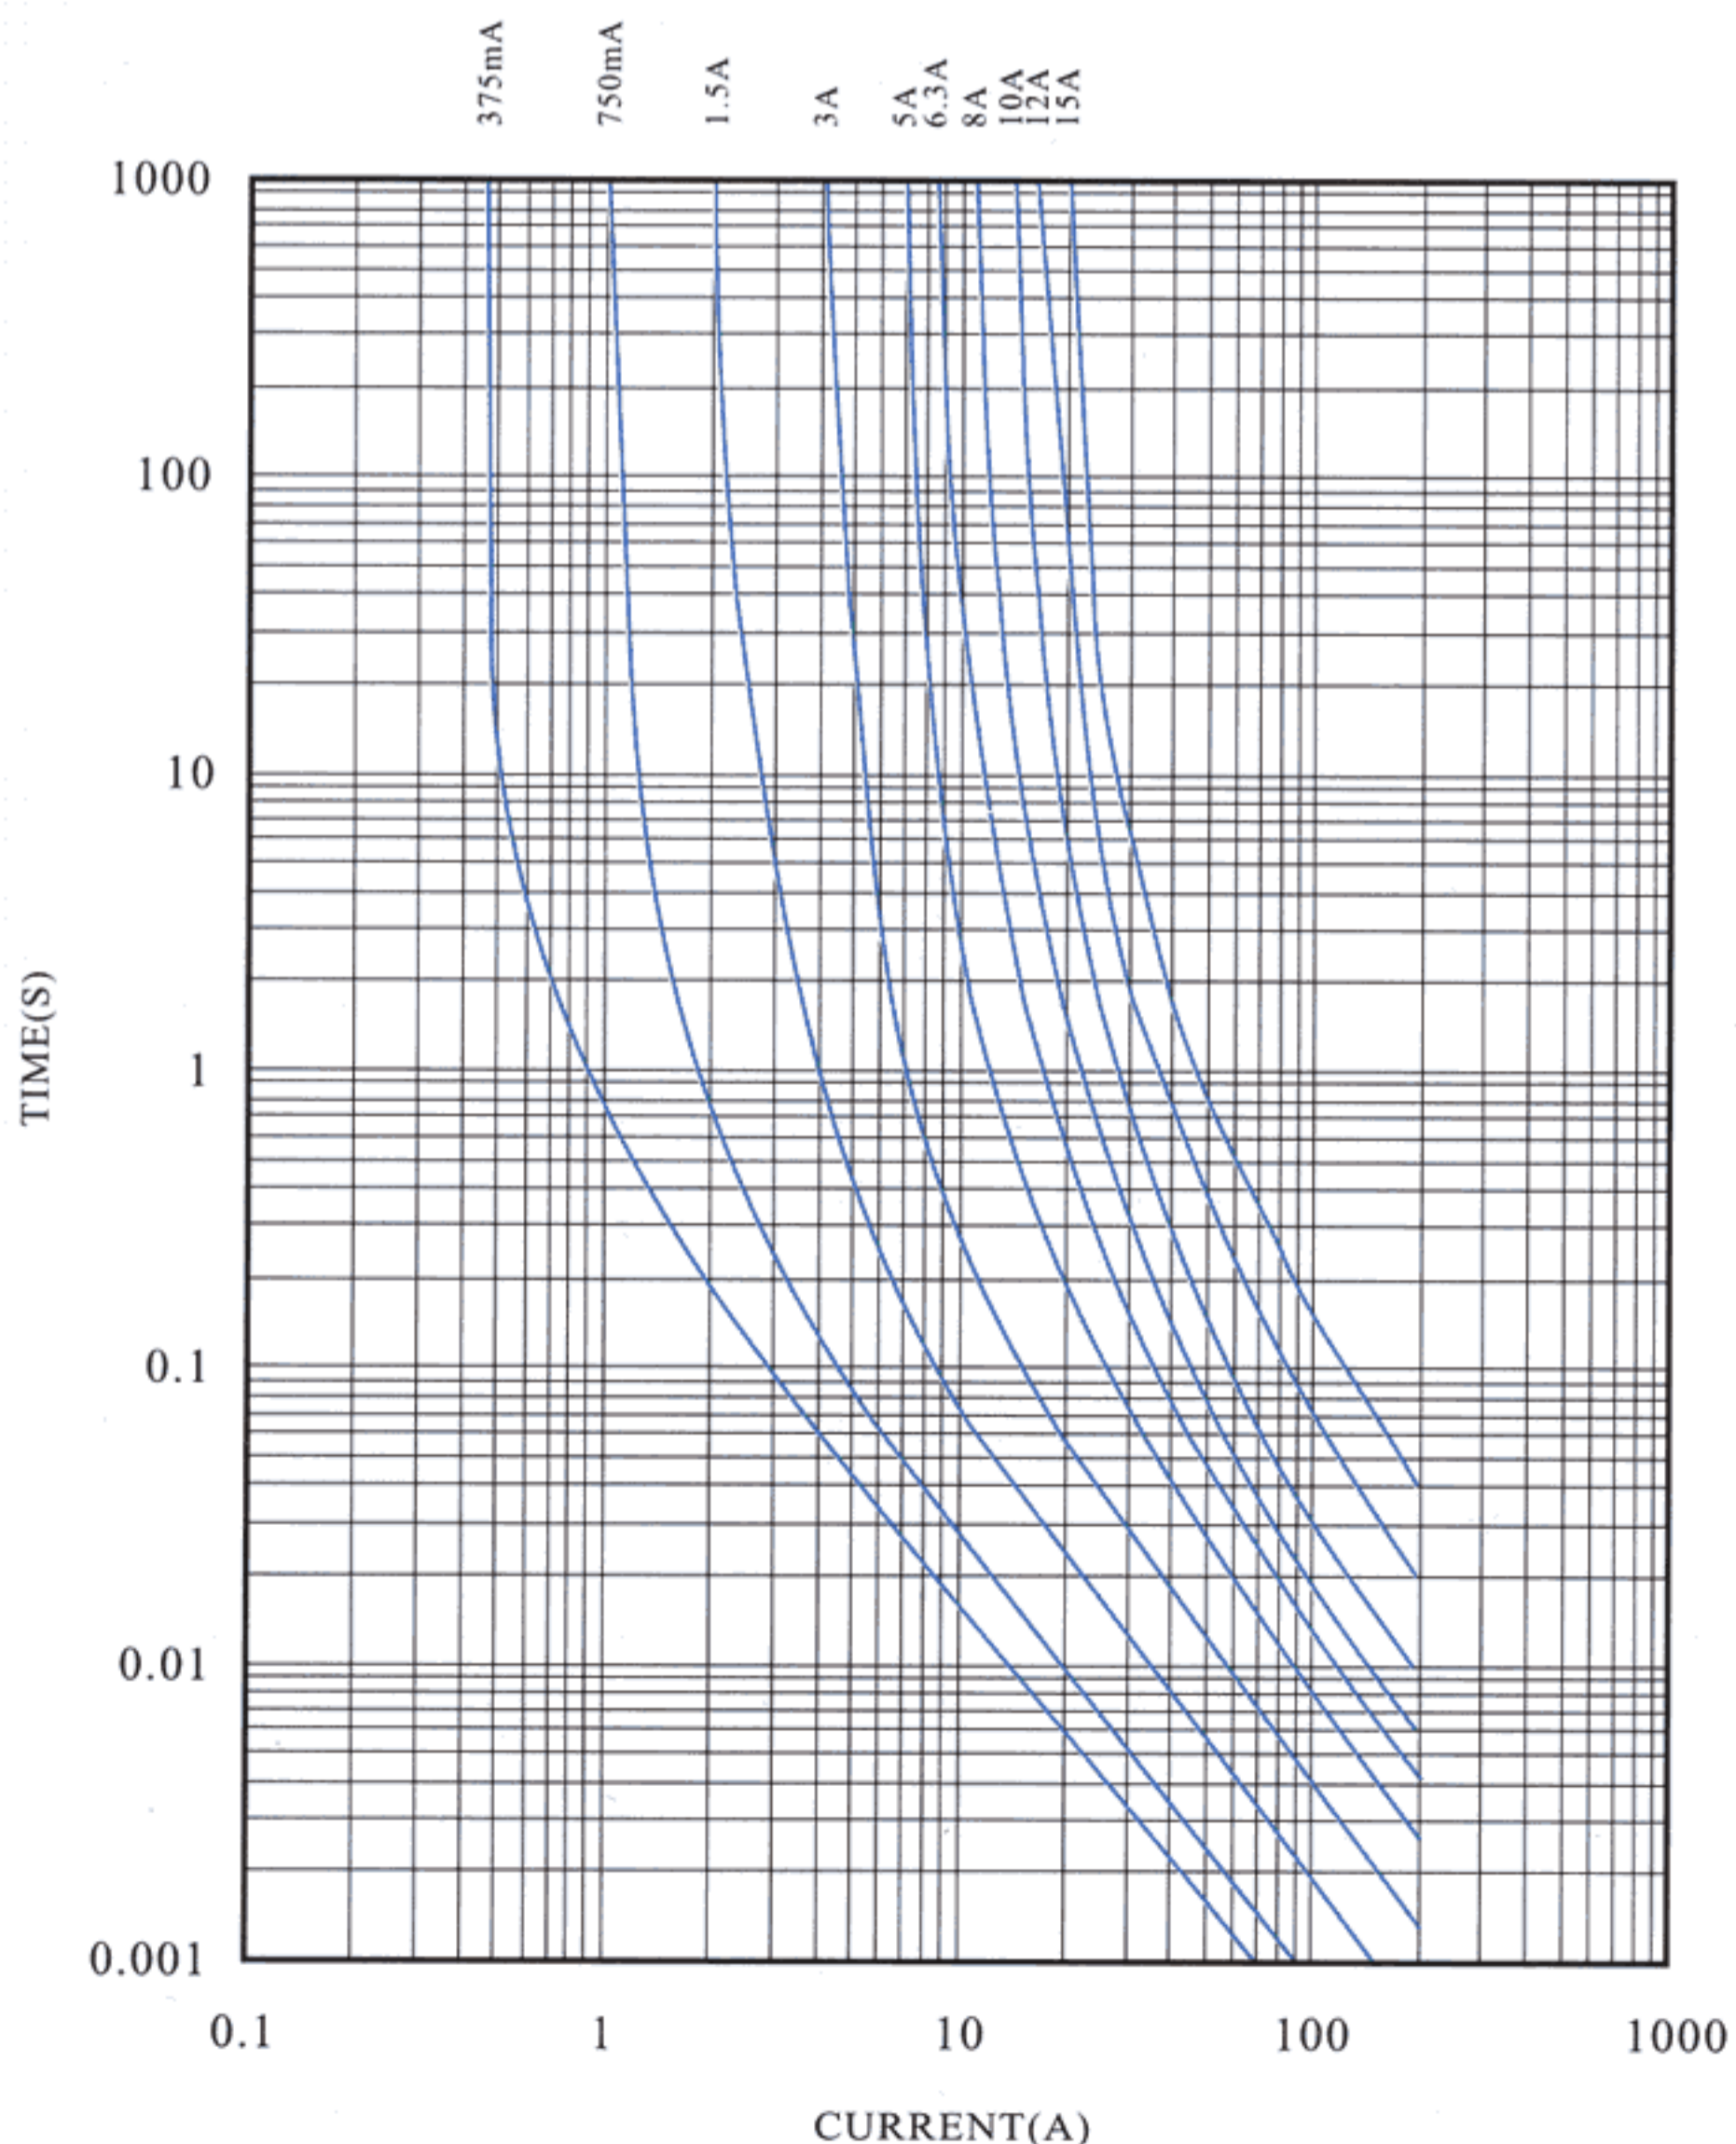

CATALOG NO.	AMPERE RATING	APPROVALS								I ² T REFERENCE (A ² .S)
		UL		CSA		PSE		KTL		
		H	L	H	L	H	L	H		
0100H/L	100mA	●	●	●	●				●	0.0032
0125H/L	125mA	●	●	●	●				●	0.0049
0150H/L	150mA	●	●	●	●				●	0.0070
0160H/L	160mA	●	●	●	●				●	0.0080
0200H/L	200mA	●	●	●	●				●	0.013
0250H/L	250mA	●	●	●	●				●	0.32
0300H/L	300mA	●	●	●	●				●	0.46
0315H/L	315mA	●	●	●	●				●	0.50
0350H/L	350mA	●	●	●	●				●	0.62
0375H/L	375mA	●	●	●	●				●	0.71
0400H/L	400mA	●	●	●	●				●	0.81
0500H/L	500mA	●	●	●	●				●	1.4
0600H/L	600mA	●	●	●	●				●	2.0
0630H/L	630mA	●	●	●	●				●	2.3
0700H/L	700mA	●	●	●	●				●	2.8
0750H/L	750mA	●	●	●	●				●	3.2
0800H/L	800mA	●	●	●	●				●	3.6
010H/L	1A	●	●	●	●	●	●		●	5.7
012H/L	1.2A	●	●	●	●	●	●		●	8.2
013H/L	1.25A	●	●	●	●	●	●		●	8.9
015H/L	1.5A	●	●	●	●	●	●		●	13
016H/L	1.6A	●	●	●	●	●	●		●	17
020H/L	2A		●	●	●	●	●		●	27
025H/L	2.5A		●	●	●	●	●		●	30
030H/L	3A		●	●	●	●	●		●	36
032H/L	3.15A		●	●	●	●	●		●	40
035H/L	3.5A		●	●	●	●	●		●	50
040H/L	4A		●	●	●	●	●		●	79
050H/L	5A		●	●	●	●	●		●	111
060H/L	6A					●	●		●	130
063H/L	6.3A					●	●		●	137
070H/L	7A					●	●		●	155
080H/L	8A					●	●		●	233
090H/L	9A					●	●		●	279
100H/L	10A					●	●		●	304
120H/L	12A					●	●		●	438
150H/L	15A					●	●		●	684

H DENOTES FOR 250V
 L DENOTES FOR 125V
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:
 10,000 amperes at 125V AC
 35 amperes at 250V AC (100mA-1A)
 100 amperes at 250V AC (1.2A-3.5A)
 100 amperes at 250V AC (4A-5A)
 500 amperes at 125V AC (1A-15A) PSE
 100 amperes at 250V AC (100mA-15A) PSE,KTL

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
100%	4 hours Min
135%	1 hour Max
200%	20 sec Max