



61NR,62NR 6.35 ϕ × 32

GLASS TUBE FUSE (FAST-BLOW)

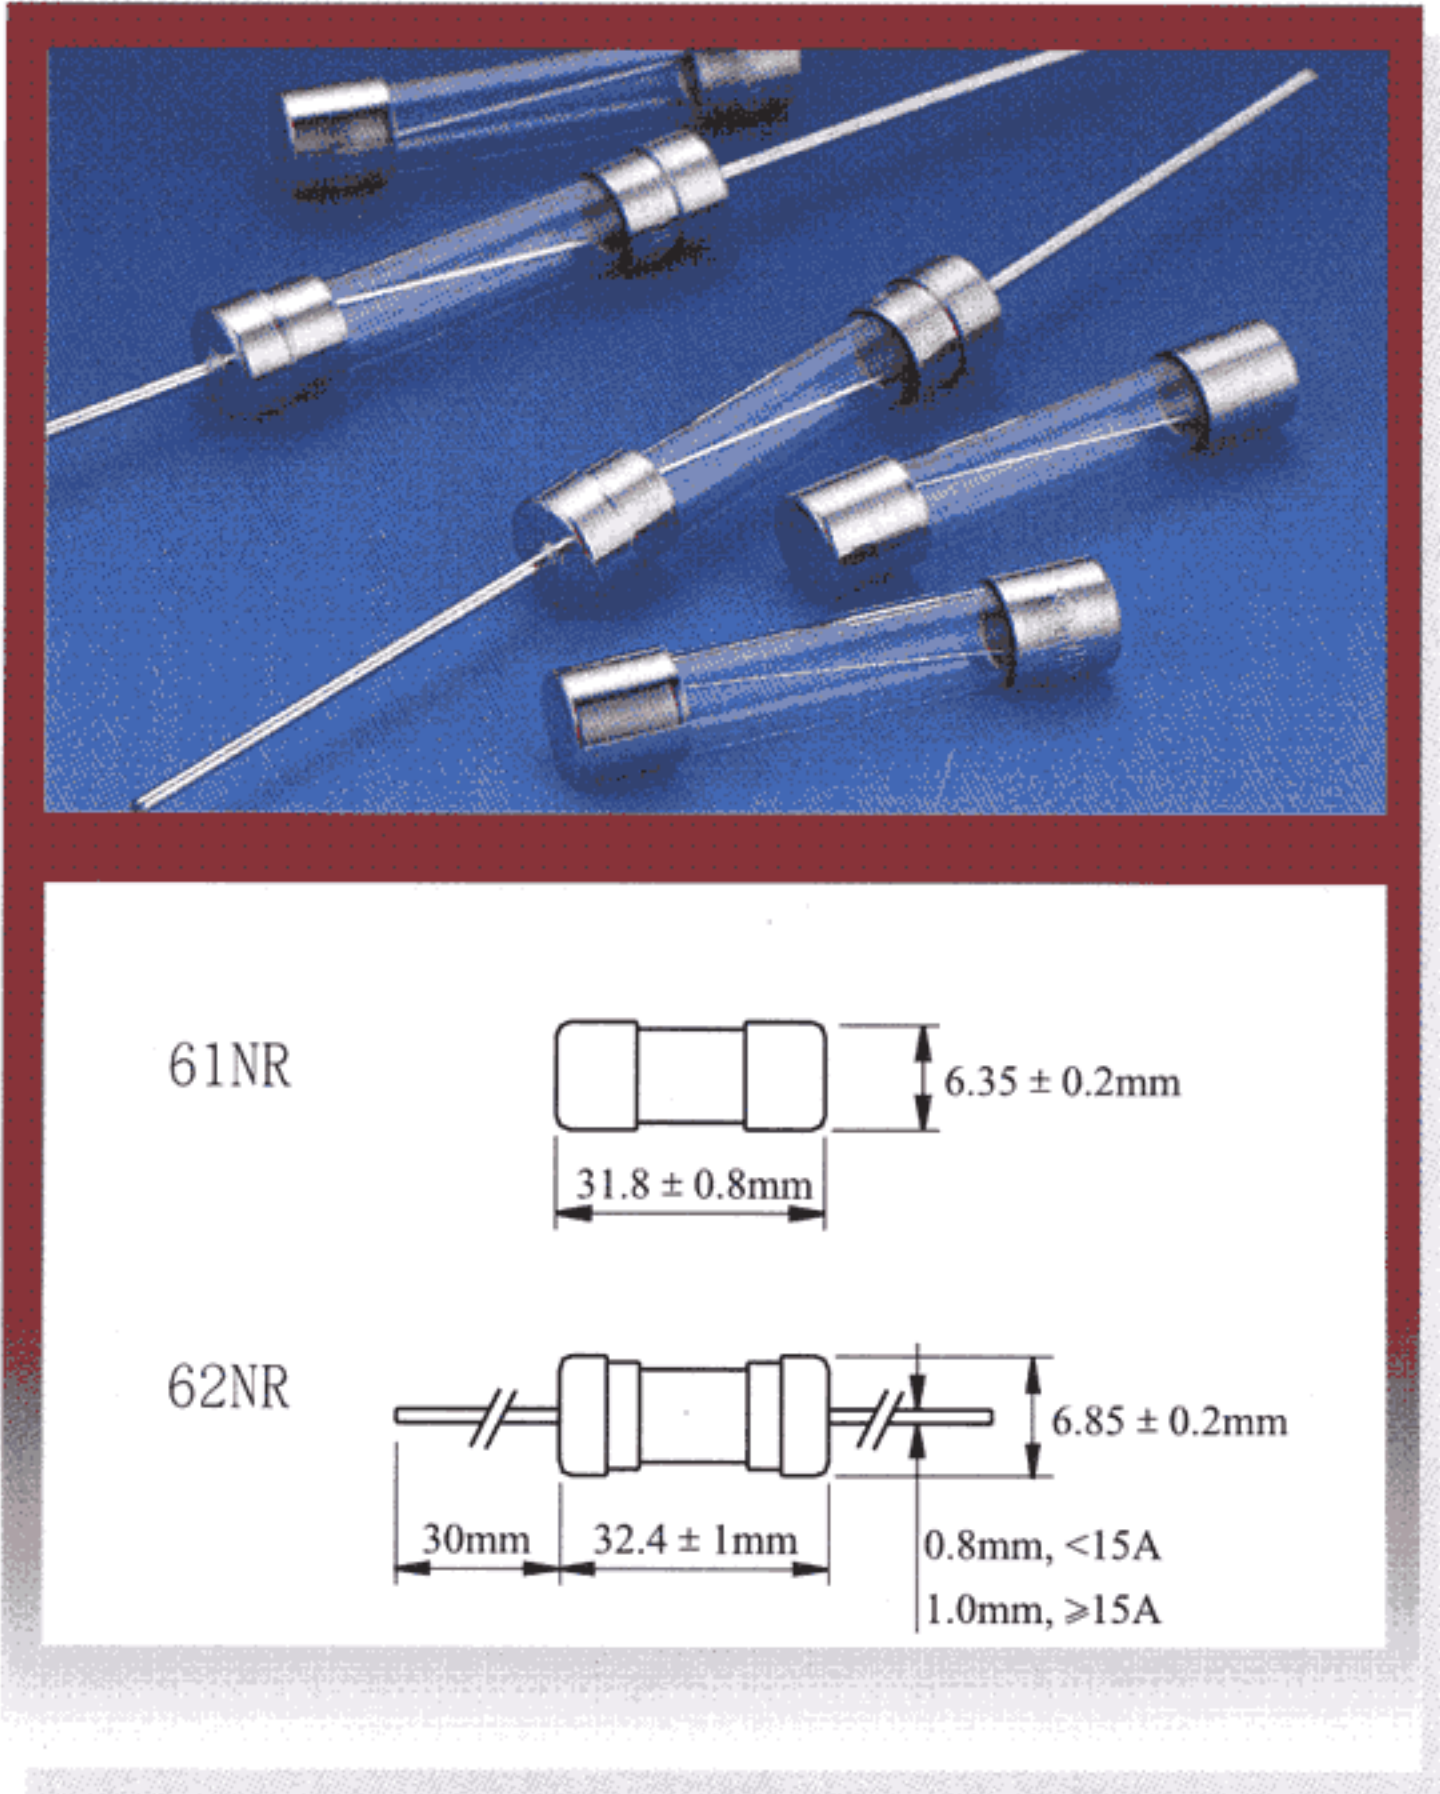

I-T CHARACTERISTICS CURVE

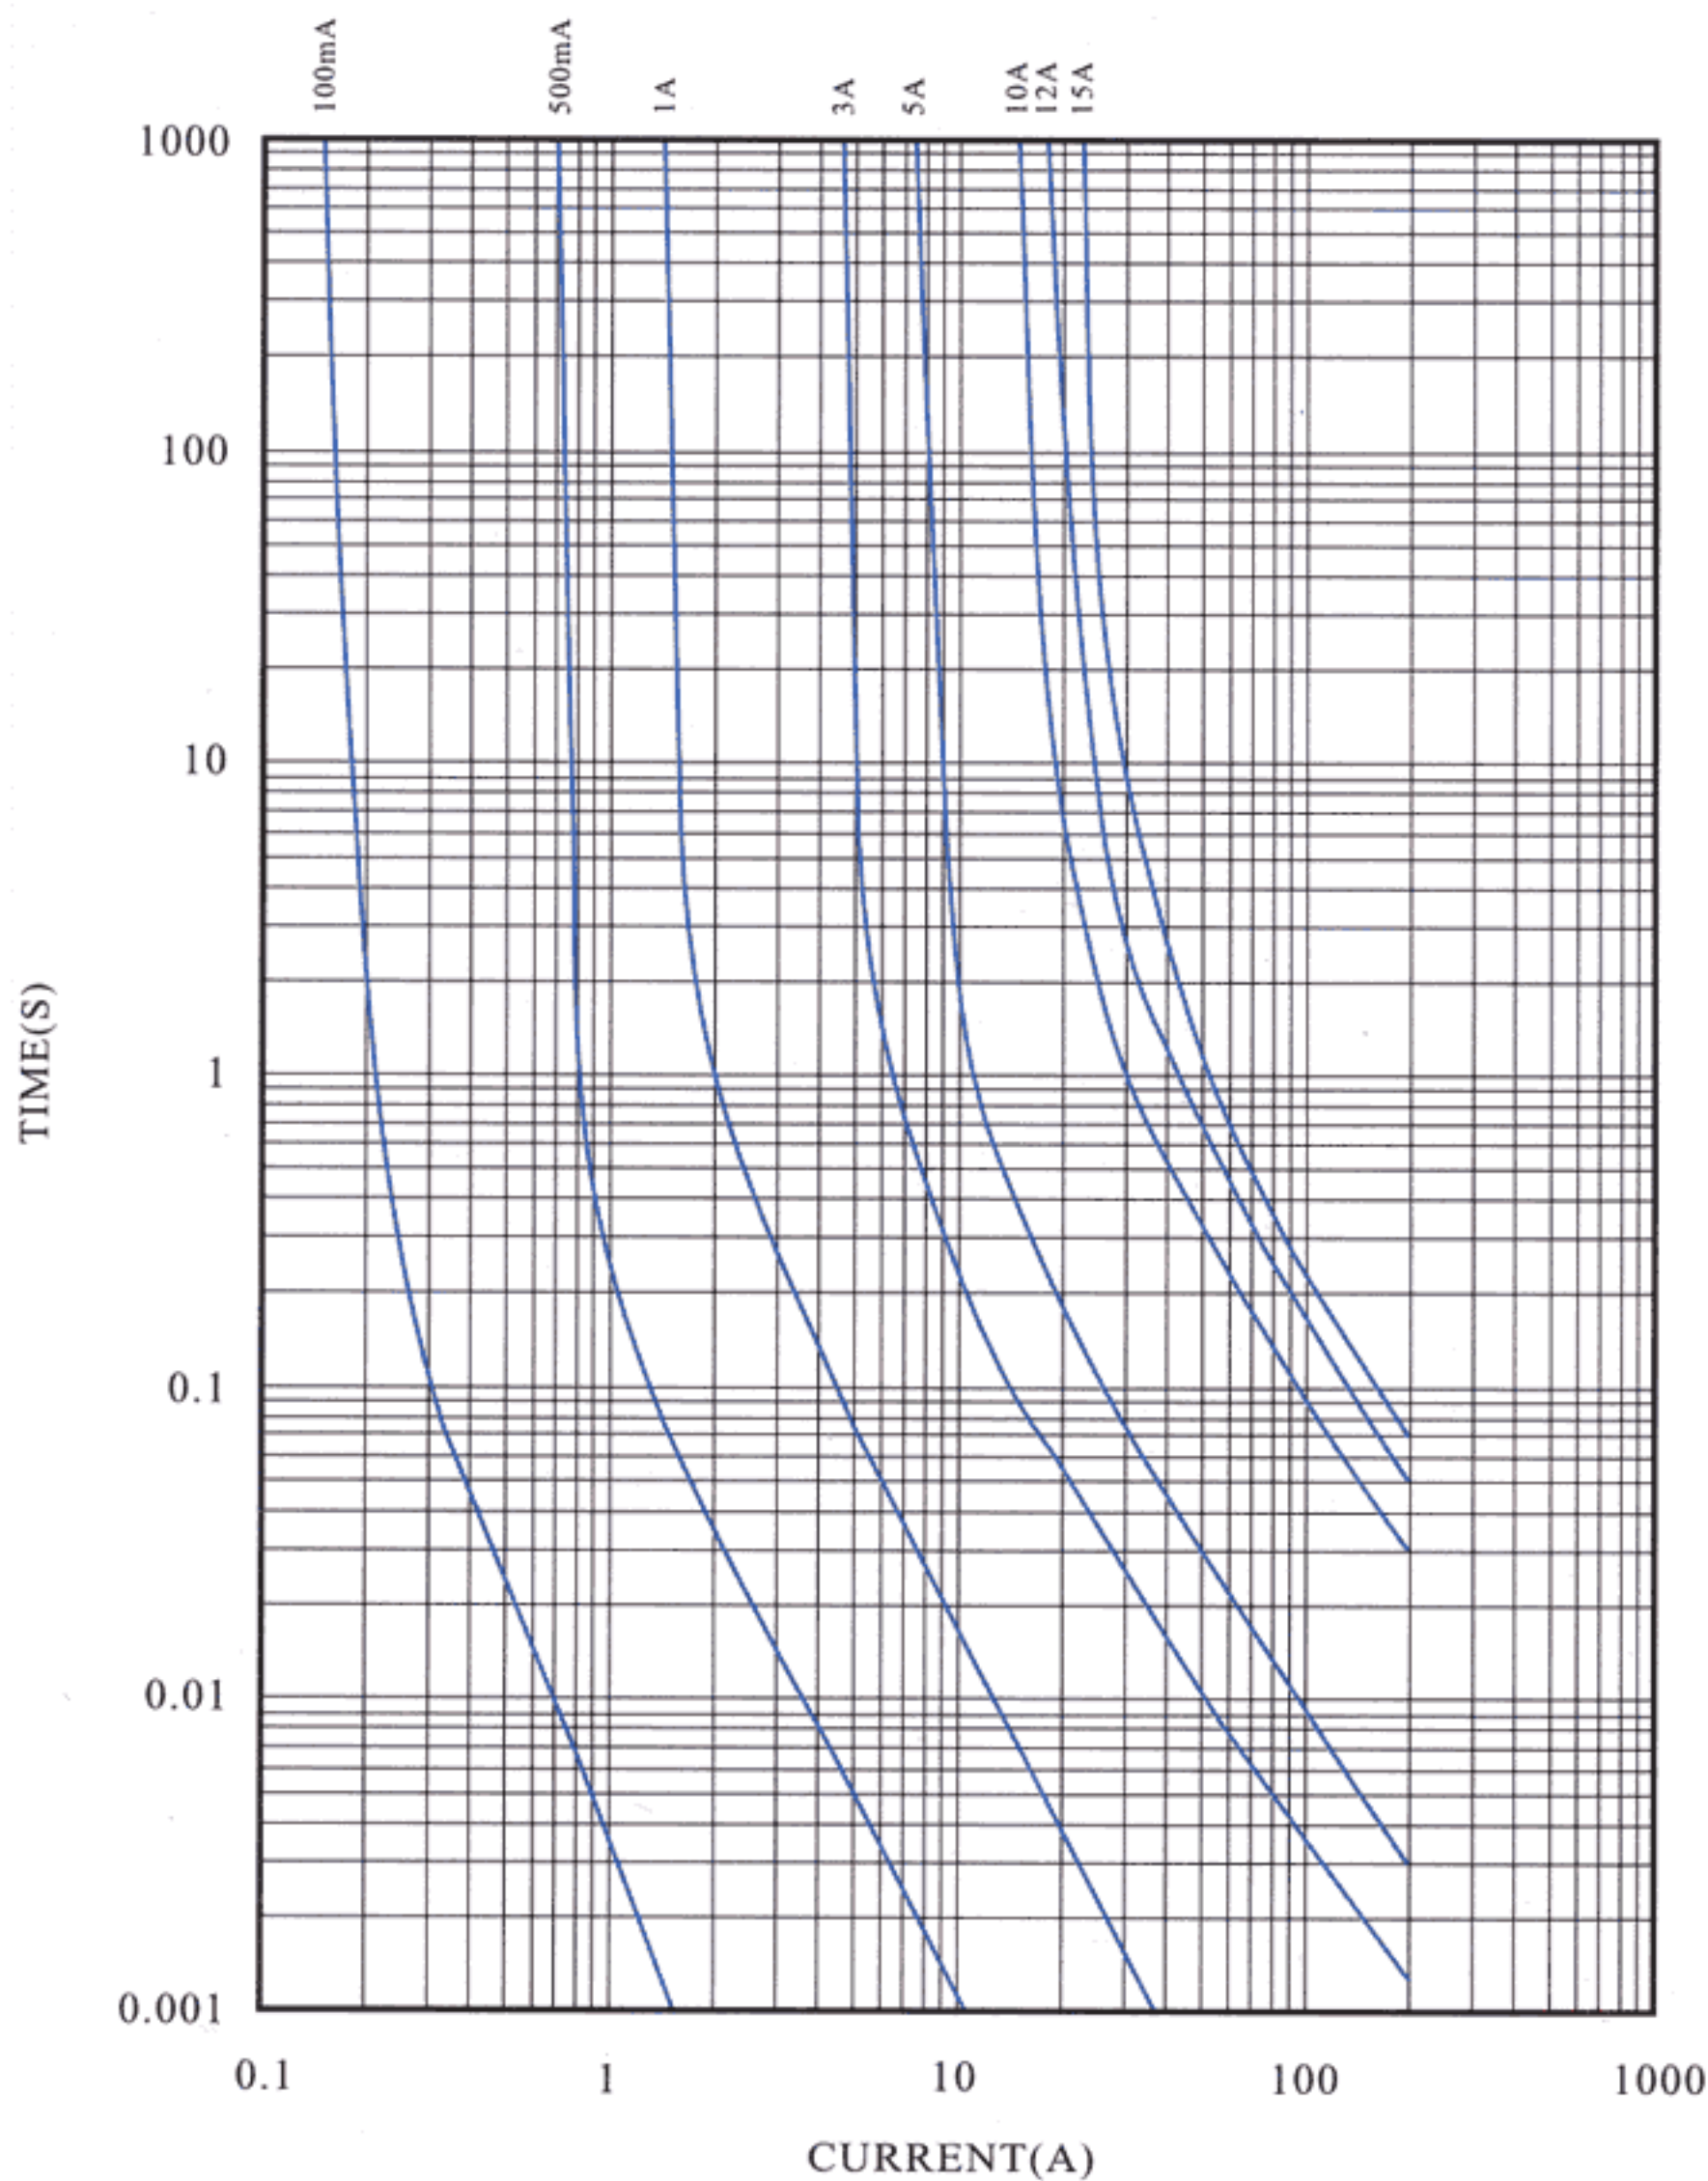

CATALOG NO.	AMPERE RATING	APPROVALS			I ² T REFERENCE (A ² .S)
		PSE		KTL	
		H	L	H	
0100H/L	100mA			●	0.0046
0125H/L	125mA			●	0.0070
0150H/L	150mA			●	0.0093
0160H/L	160mA			●	0.010
0175H/L	175mA			●	0.013
0200H/L	200mA			●	0.021
0250H/L	250mA			●	0.056
0300H/L	300mA			●	0.082
0315H/L	315mA			●	0.10
0350H/L	350mA			●	0.13
0375H/L	375mA			●	0.17
0400H/L	400mA			●	0.19
0500H/L	500mA			●	0.23
0600H/L	600mA			●	0.56
0630H/L	630mA			●	0.71
0700H/L	700mA			●	0.93
0750H/L	750mA			●	1.0
0800H/L	800mA			●	1.2
010H/L	1A	●	●	●	3.6
012H/L	1.2A	●	●	●	4.5
013H/L	1.25A	●	●	●	8.4
015H/L	1.5A	●	●	●	10
016H/L	1.6A	●	●	●	17
020H/L	2A	●	●	●	31
025H/L	2.5A	●	●	●	44
030H/L	3A	●	●	●	53
032H/L	3.15A	●	●	●	57
035H/L	3.5A	●	●	●	69
040H/L	4A	●	●	●	102
050H/L	5A	●	●	●	124
060H/L	6A	●	●	●	182
063H/L	6.3A	●	●	●	299
070H/L	7A	●	●	●	469
080H/L	8A	●	●	●	748
090H/L	9A	●	●	●	928
100H/L	10A	●	●	●	1549
120H/L	12A	●	●	●	1850
150H/L	15A	●	●	●	2000

H DENOTES FOR 250V
 L DENOTES FOR 125V
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:
 500 amperes at 125V AC (1A-15A) PSE
 100 amperes at 250V AC (100mA-15A) PSE,KTL

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
130%	1 hour Min
160%	1hour Max
200%	120 sec Max