



61ST,62ST 6.35 ϕ × 32

GLASS TUBE FUSE (MEDIUM SLOW-BLOW)

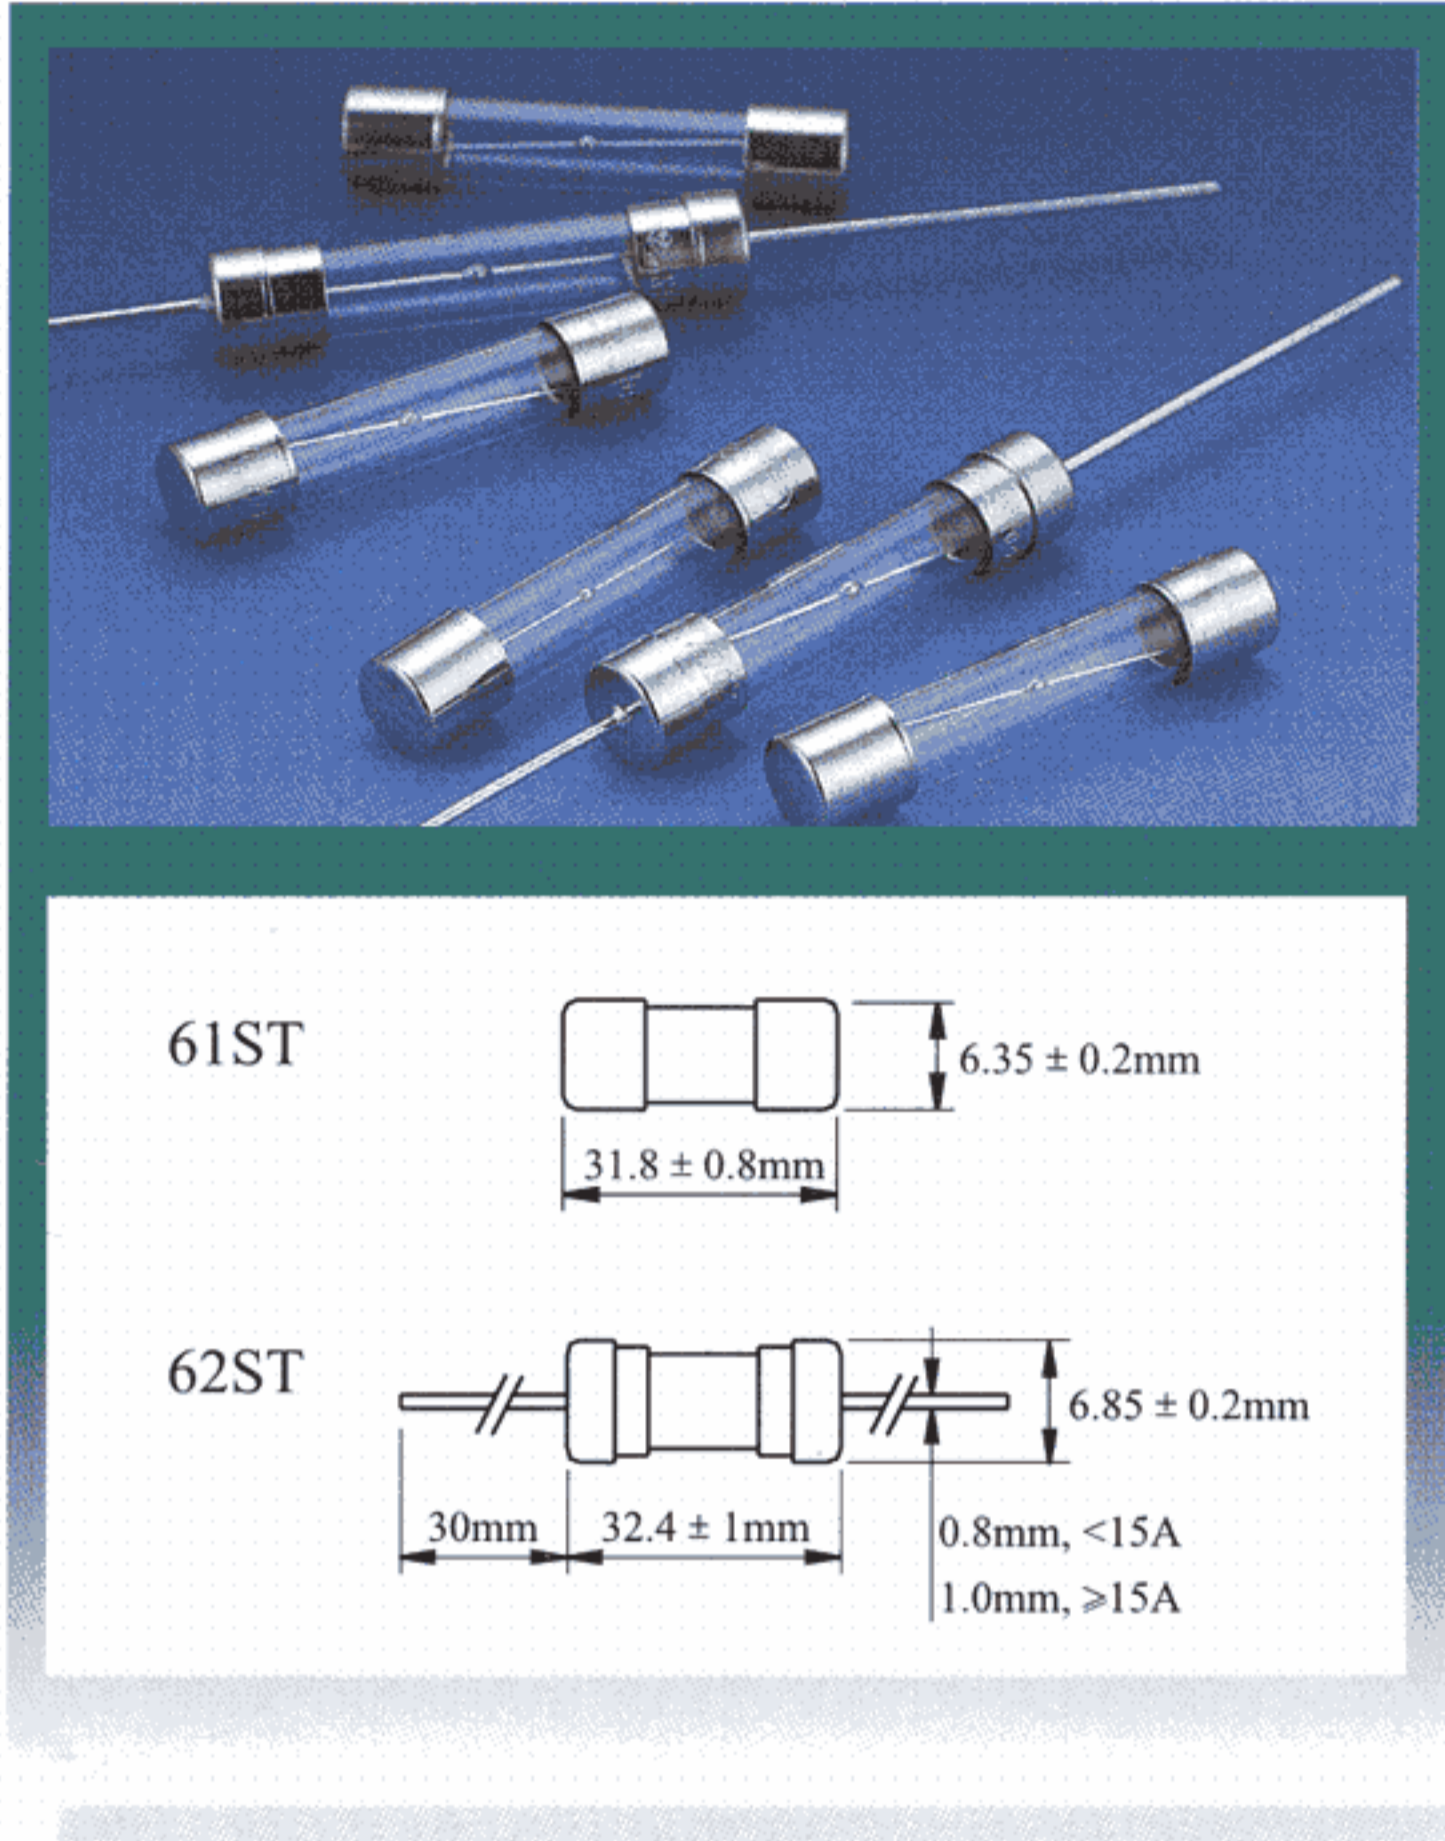

I-T CHARACTERISTICS CURVE

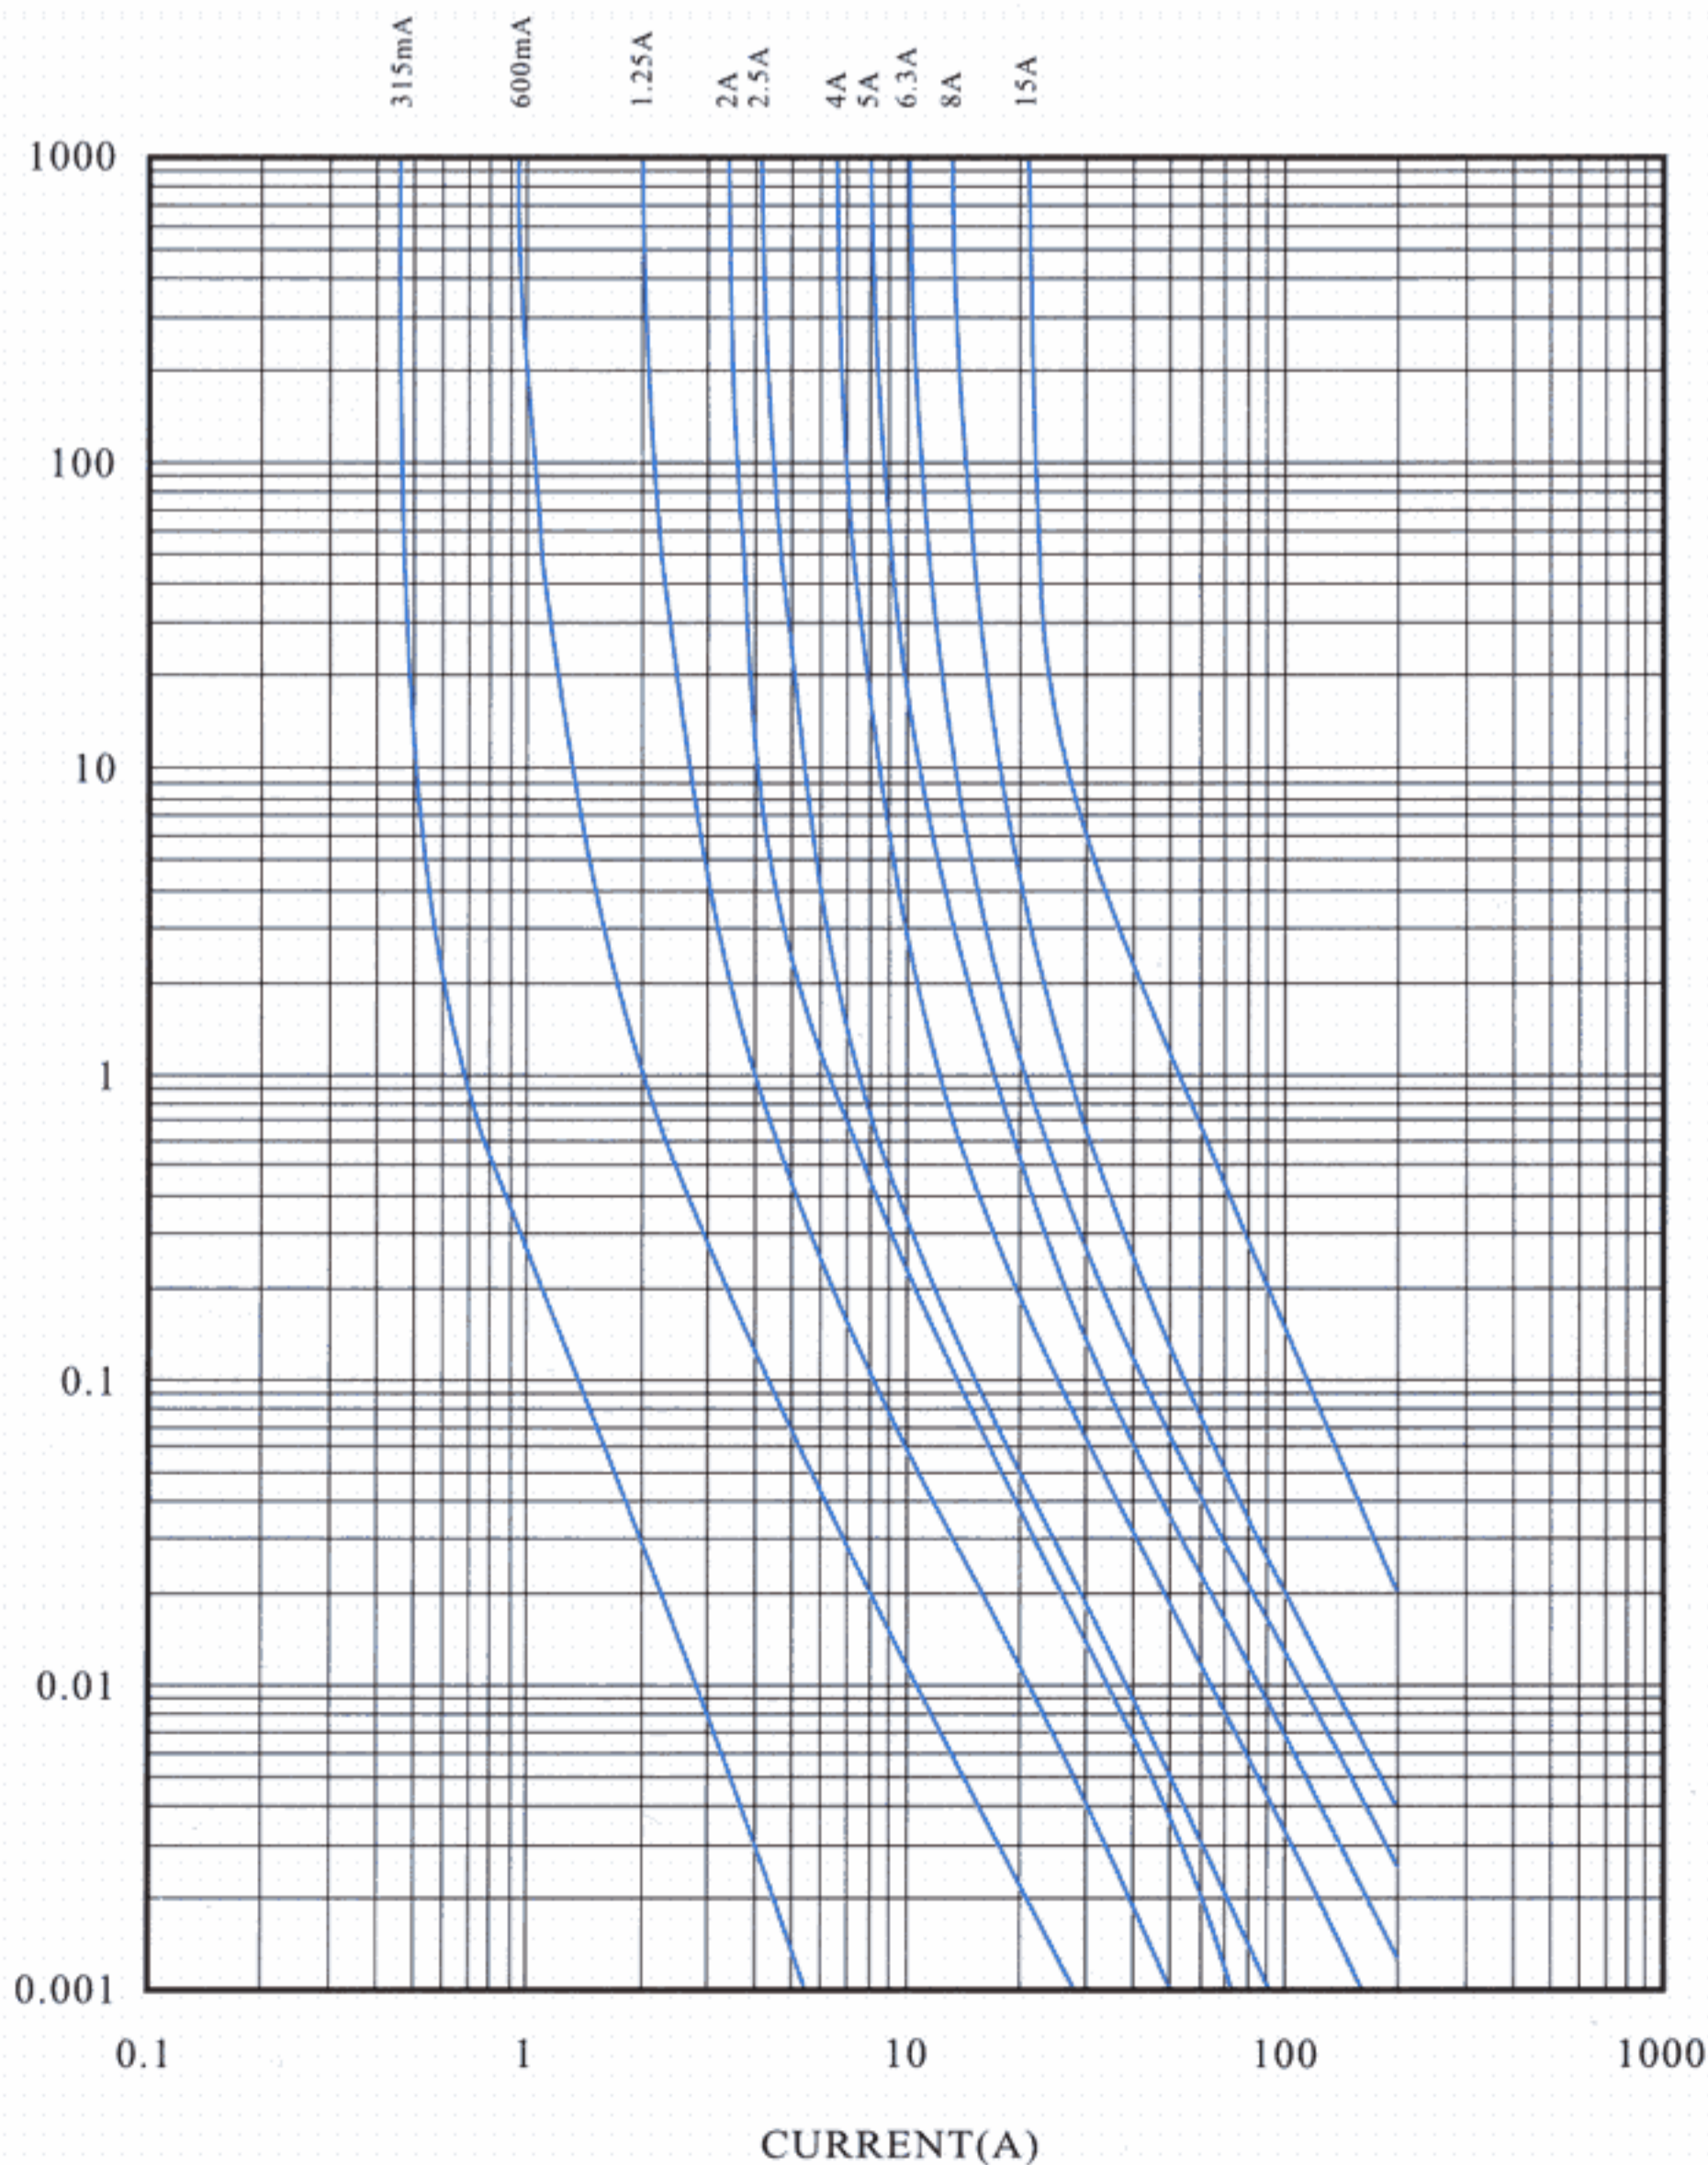

CATALOG NO.	AMPERE RATING	APPROVALS		I ² T REFERENCE (A ² .S)
		PSE		
		H	L	
0100H/L	100mA			0.016
0125H/L	125mA			0.023
0150H/L	150mA			0.051
0160H/L	160mA			0.054
0200H/L	200mA			0.072
0250H/L	250mA			0.13
0300H/L	300mA			0.19
0315H/L	315mA			0.26
0350H/L	350mA			0.30
0375H/L	375mA			0.37
0400H/L	400mA			0.47
0500H/L	500mA			0.71
0600H/L	600mA			1.0
0630H/L	630mA			1.2
0700H/L	700mA			1.9
0750H/L	750mA			2.3
0800H/L	800mA			3.3
010H/L	1A	●	●	6.5
012H/L	1.2A	●	●	8.2
013H/L	1.25A	●	●	9.8
015H/L	1.5A	●	●	15
016H/L	1.6A	●	●	17
020H/L	2A	●	●	35
025H/L	2.5A	●	●	57
030H/L	3A	●	●	70
032H/L	3.15A	●	●	78
035H/L	3.5A	●	●	99
040H/L	4A	●	●	109
050H/L	5A	●	●	137
060H/L	6A	●	●	190
063H/L	6.3A	●	●	210
070H/L	7A	●	●	259
080H/L	8A	●	●	320
090H/L	9A	●	●	427
100H/L	10A	●	●	618
120H/L	12A	●	●	934
150H/L	15A	●	●	1467

H DENOTES FOR 250V
 L DENOTES FOR 125V
 ● DENOTES FOR APPROVED

INTERRUPTING RATING:
 500 amperes at 125V AC (1A-15A) PSE
 100 amperes at 250V AC (1A-15A) PSE

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME
130%	1 hour Min
160%	1 hour Max
200%	120 sec Max