


65NM 6.35^φ × 32

瓷保险丝管(速断型) CERAMIC TUBE FUSE (FAST-BLOW)



I-T CHARACTERISTICS CURVE
电流-时间曲线图

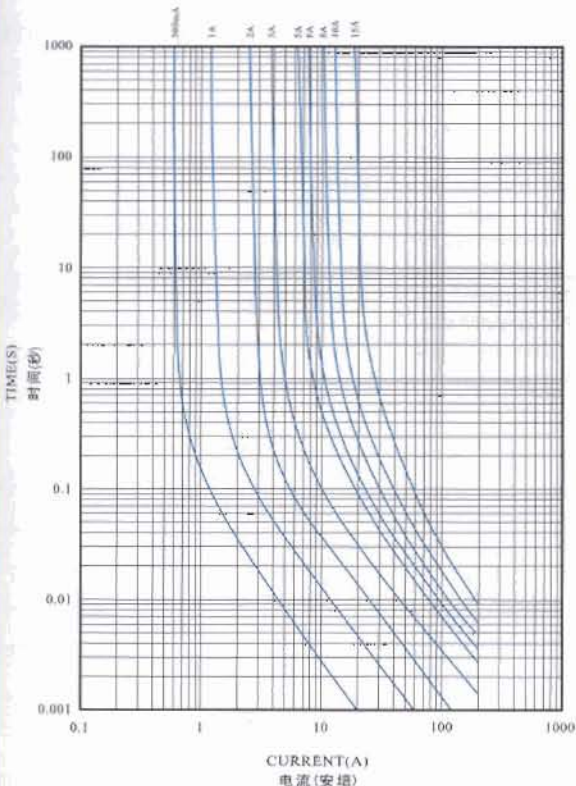

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS			I ² T 参考值 REFERENCE (A ² S)
		PSE		KTL	
		H	L	H	
0300H/L	300mA			●	
0315H/L	315mA			●	
0350H/L	350mA			●	
0375H/L	375mA			●	
0400H/L	400mA			●	
0500H/L	500mA			●	4.1
0600H/L	600mA			●	5.9
0630H/L	630mA			●	6.4
0750H/L	750mA			●	9.2
0800H/L	800mA			●	10.2
010H/L	1A	●	●	●	16
012H/L	1.2A	●	●	●	20
013H/L	1.25A	●	●	●	24
015H/L	1.5A	●	●	●	26
016H/L	1.6A	●	●	●	32
020H/L	2A	●	●	●	42
025H/L	2.5A	●	●	●	66
030H/L	3A	●	●	●	94
032H/L	3.15A	●	●	●	128
035H/L	3.5A	●	●	●	168
040H/L	4A	●	●	●	262
050H/L	5A	●	●	●	377
060H/L	6A	●	●	●	443
070H/L	7A	●	●	●	590
080H/L	8A	●	●	●	
100H/L	10A	●	●	●	
120H/L	12A	●	●	●	
130H/L	13A	●	●	●	
150H/L	15A	●	●	●	
200H/L	20A				
250H/L	25A				
300H/L	30A				

H DENOTES FOR 250V (H表示250V)
L DENOTES FOR 125V (L表示125V)
● DENOTES FOR APPROVED (●表示已取得认证)

分断电流:

INTERRUPTING RATING:

500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (300mA-15A) PSE,KTL

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快4小时)
135%	1 hour Max (最慢1小时)
200%	2 min Max (最慢2分钟)