



65TS 6.35 $\phi$  × 32

瓷保险丝管(延时型) CERAMIC TUBE FUSE (SLOW-BLOW)

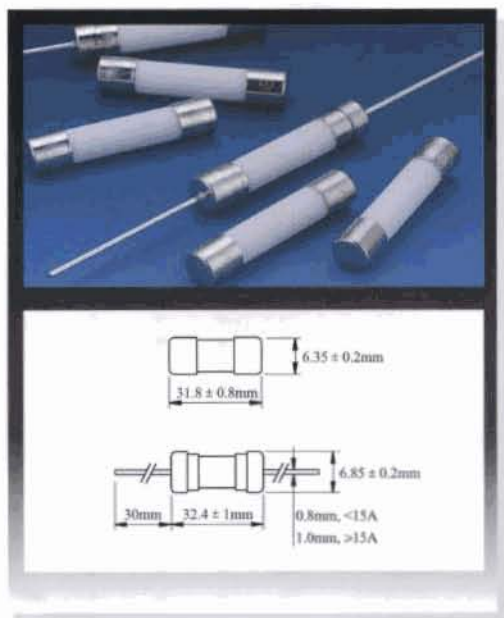

I-T CHARACTERISTICS CURVE  
电流-时间曲线图

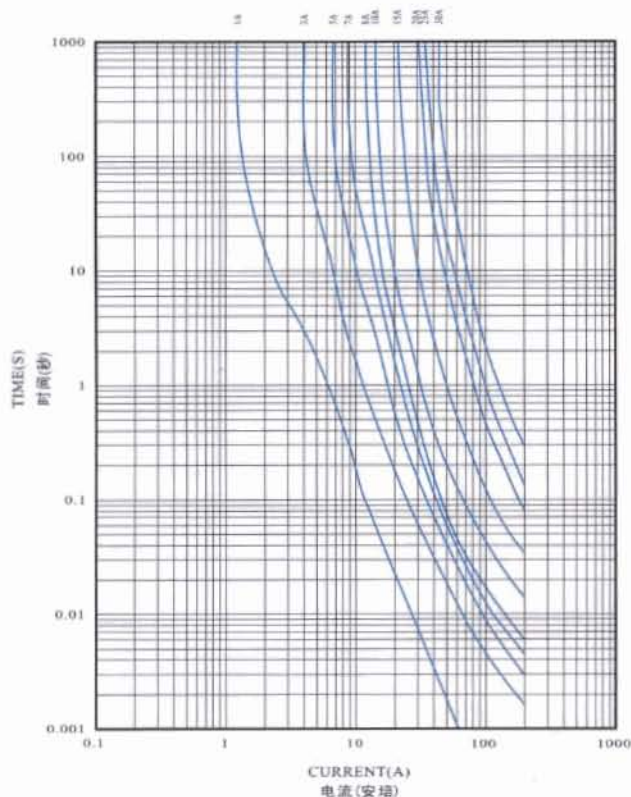

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS								I <sup>2</sup> T 参考值 REFERENCE (A <sup>2</sup> S)
		UL (CUL)		UR (CUR)		PSE		KTL		
		H	L	H	L	H	L	H		
0500H/L	500mA	●	●						●	
0600H/L	600mA	●	●						●	
0630H/L	630mA	●	●						●	
0750H/L	750mA	●	●						●	
0800H/L	800mA	●	●						●	
010H/L	1A	●	●			●	●		●	4.1
012H/L	1.2A	●	●			●	●		●	5.9
013H/L	1.25A	●	●			●	●		●	6.4
015H/L	1.5A	●	●			●	●		●	9.2
016H/L	1.6A	●	●			●	●		●	10
020H/L	2A	●	●			●	●		●	16
025H/L	2.5A	●	●			●	●		●	20
030H/L	3A	●	●			●	●		●	24
032H/L	3.15A	●	●			●	●		●	26
035H/L	3.5A	●	●			●	●		●	32
040H/L	4A	●	●			●	●		●	42
050H/L	5A	●	●			●	●		●	66
060H/L	6A	●	●			●	●		●	94
070H/L	7A	●	●			●	●		●	128
080H/L	8A	●	●			●	●		●	168
100H/L	10A	●	●			●	●	●	●	262
120H/L	12A	●	●			●	●		●	377
130H/L	13A	●	●			●	●		●	443
150H/L	15A	●	●			●	●		●	590
200H/L	20A			●	●					1058
250H/L	25A			●	●					1674
300H/L	30A			●	●					2362

H DENOTES FOR 250V (H表示250V)

L DENOTES FOR 125V (L表示125V)

● DENOTES FOR APPROVED (●表示已取得认证)

REMARK: APPROVALS OF 300H/L ONLY FOR PIGTAIL TYPE

备注: 300H/L 认证仅为引线型产品

**分断电流:**

INTERRUPTING RATING:

10,000 amperes at 125V AC (500mA-15A)

35 amperes at 250V AC (500mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-10A)

750 amperes at 250V AC (12A-15A)

1,500 amperes at 250V AC (20A-30A)

500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (500mA-15A) PSE,KTL

**电气特性 ELECTRICAL CHARACTERISTICS:**

额定 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快4小时)
135%	1 hour Max (最慢1小时)
200%	2 min Max (最慢2分钟)