

multi-country patent protection **RoHS**

A_(X)T-1W Series

**1W, FIXED INPUT, ISOLATED & UNREGULATED
DUAL OUTPUT DC-DC CONVERTER
ULTRAMINIATURE SMD PACKAGE**

FEATURES

- Dual Voltage Output
- SMD Package Style
- High Efficiency up to 78%
- Industry Standard Pinout
- No Heat sink Required
- 1KVDC Isolation
- High Power Density
- Internal SMD construction
- Temperature Range: -40°C to +85°C
- No External Component Required
- RoHS Compliance

APPLICATIONS

The A_(X)T-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

A0505(X)T-1W



MORNSUN Science & Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ.)	Certificate
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
A0505(X)T-1W	5	4.5-5.5	±5	±100	±10	71	UL
A0509(X)T-1W			±9	±56	±6	77	UL
A0512(X)T-1W			±12	±42	±5	78	UL
A0515(X)T-1W			±15	±33	±4	78	UL
A1205(X)T-1W	12	10.8-13.2	±5	±100	±10	71	UL
A1209(X)T-1W			±9	±56	±6	73	UL
A1212(X)T-1W			±12	±42	±5	74	UL
A1215(X)T-1W			±15	±33	±4	74	UL
A2405(X)T-1W	24	21.6-26.4	±5V	±100	±10	72	
A2409(X)T-1W			±9V	±56	±6	74	
A2412(X)T-1W			±12V	±42	±5	76	
A2415(X)T-1W			±15V	±33	±4	77	
A2424(X)T-1W			±24	±21	±2	78	

Note : 1. the A_XT-1W series have no 3,6,8,9 pin. For example A0505XT-1W.
2. A_XT-1W series : UL-609501 Pending.

ISOLATION SPECIFICATIONS

Item	Test Conditions	Min	Typ.	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ.	Max	Units
Output power		0.1		1	W
Line regulation	For Vin change of 1%			±1.2	%
Load regulation	10%to100% load (5V output)		12.8	15	
	10%to100% load (9V output)		8.3	10	
	10%to100% load (12V output)		6.8	10	
	10%to100% load (15V output)		6.3	10	
	10%to100% load (24V output)		6.0	10	
Output voltage accuracy		See tolerance envelope graph			
Temperature drift	100% full load			0.03	%/°C
Output ripple & Noise*	20MHz Bandwidth		50	75	mVp-p
Switching frequency	Full load, nominal input(5V、12V)		100		KHz
	Full load, nominal input (24V)		500		

*test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


Note:
1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.

COMMON SPECIFICATION


Item	Test Conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			260	
Cooling		Free air convection			
package material		Epoxy Resin(UL94-V0)			
MTBF		3500			K Hours
Weight			3		G
Short circuit protection*				1	S

*Supply voltage must be discontinued at the end of short circuit duration.


TYPICAL CHARACTERISTICS

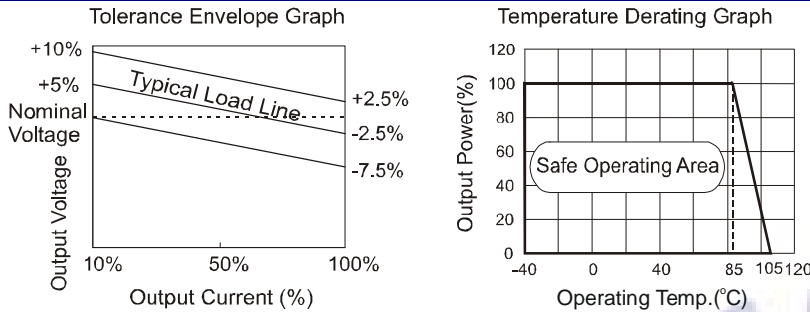

RECOMMENDED REFLOW SOLDERING PROFILE

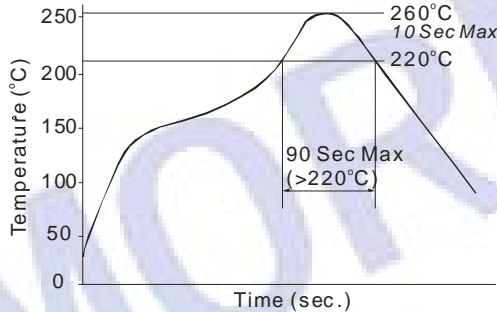

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

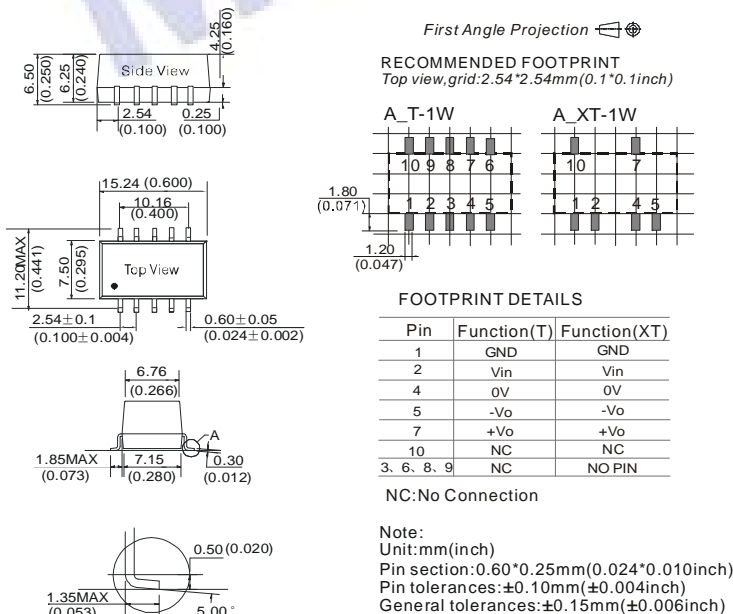


APPLICATION NOTE

Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (A_(X)T-W2 Series).

Recommended testing circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure1).



(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).


EXTERNAL CAPACITOR TABLE (Table 1)

Vin (VDC)	Cin (uF)	Dual Vout (VDC)	Cout (uF)
3.3/5	4.7	±3.3/5	4.7
12	2.2	±9	2.2
24	1	±12	1
-	-	±15	1

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure2).

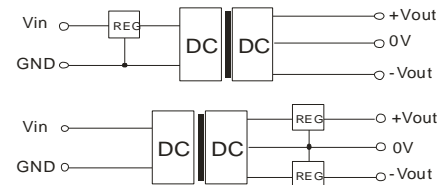

(Figure2)

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

No parallel connection or plug and play.