


AR-G4X2-30S2232-12V White

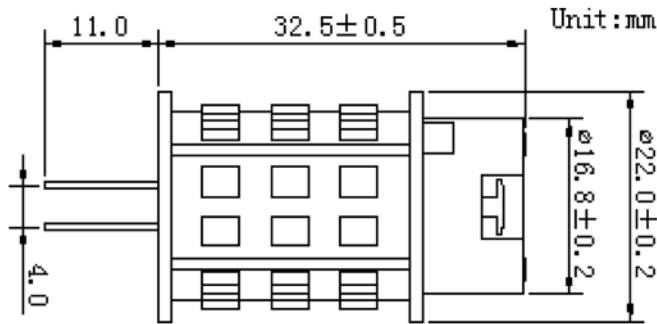

Specification:

Parameter	Symbol	Values			Unit		
		MIN	TYP	MAX			
Input voltage	V _{in}	10	12	30	V _{DC}		
Input current(Bright)	I _{in}	0.05	0.14	0.17	A		
Oscillation Frequency	f	suitable for Industrial Frequency Transformer or High Frequency Electronic Transformer			Hz		
On-off times		10 000					
Conversion efficiency	η	≥86%					
Low-temperature start time	t	<0.5			s		
Power Consumption (MAX)	P	1.7			W		
LED QTY	-	30			PCS		
CRI	R _a	≥70					
Product life	H	50 000			Hr		
Lamp shell		FR-4					
Protection class	IP	IP20			-		
Base		G4					
Center illuminance	E	Height 1m(CW)	Height 1.5m(CW)	Height 2m(CW)	Height 2.5m(CW)	Height 3m(CW)	LX
		-	-	-	-	-	
CCT	-	6000			K		
Luminous efficiency	η	80-85			Lm/W		
Lumunous flux (MAX)	Φ	130-135			Lm		
Viewing Angle	-	120			Deg		
Operating Humidity	RH	25%			95%	%	
Light source failure		3000Hr≤8%			30000Hr≤20%		
Operating Temperature	Topr	-20	25	40	°C		
EMC	EMI Radiation	Compliance to EN55015			-		

Block Diagram:

