

ARPV-68-05004 (5V, 0.8A, 4W)
ARPV-68-12004 (12V, 0.35A, 4W)

1 Scope

This is the engineering specification of 2~ 4Watt power wall plug-in AC/DC adapter with wide voltage 100~240V AC input, single DC output, packed into a molded plastic case.

2 Connector

The following specifies the input and output connection requirement of the power supply.

2.1 Input connector. Two sheet copper socket connector or two wire

2.2 Output cable/connector. A two wire cable with standard DC connector.

2.3 Pin assignments

INPUT: Pin1~Line(L)

Pin2~Neutral(N)

OUTPUT: Outside ~+V

Inside~-V

3 Electrical requirements

Unless specified otherwise, all specifications are at nominal input voltage, full load, 25°C, PSU at warmed up condition.

3.1 Input

The operating conditions with respect to the AC input voltage are described in this section.

3.1.1 Input Voltage

The operating voltage range is 100V to 240VAC.

3.1.2 Input Current

When the input voltage is 100VA at 7W, then the max input current shall be less then0.2A

When the input voltage is 240VA

at 7W, then the max input current shall be less then0.1A Unless specified otherwise,

all specifications are at nominal input voltage, full load, 25°C, PSU at warmed up condition.

3.1 Input


The operating conditions with respect to the AC input voltage are described in this section.

3.1.1 Input Voltage

The operating voltage range is 100V to 240VAC.


3.1.2 Input Current

When the input voltage is 100VA at 7W, then the max input current shall be less then0.2A When the input voltage is 240VA at 7W, then the max input current shall be less then0.1A

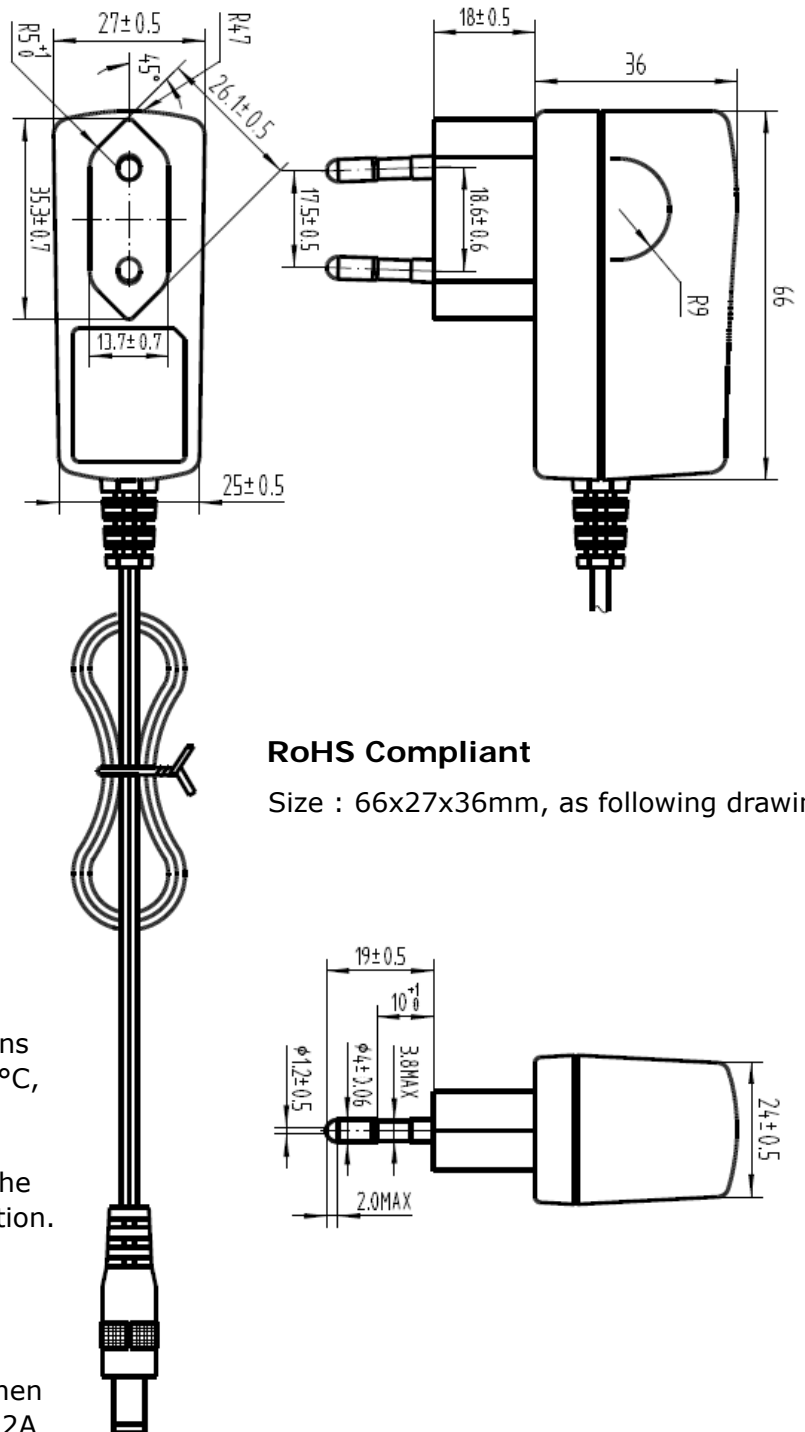

RoHS Compliant

Size : 66x27x36mm, as following drawing.

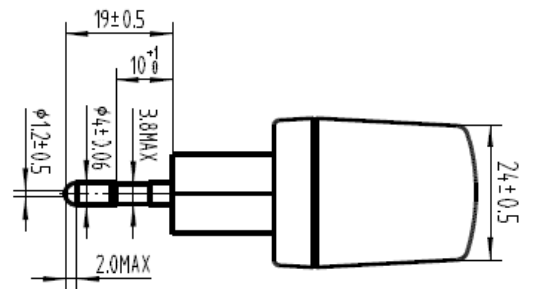

3.1.6 Power Factor

Input AC voltage connects to internal diode bridge rectifier and Filter6W, output load is ≥ 0.60

3.2 Output

The operating conditions for the regulated DC output are described in this section.

3.2.1 Output Power

Depends on models, possible Max. Output power is 4W with O/P voltage of 4V and above.

3.2.2 Output Voltage

Initial point voltage is measured at Min. Load/Half Load/Max. Load, at nominal input AC voltage. This voltage change is indicative of change due to process variation and change due to load variation.

The set point tolerance is measured with reference to the respective nominal Voltage and expressed as percentage of nominal output voltage.

| Model | Output | Nominal voltage | Setpointtolerance | Useradjust |
|---------------|--------|-----------------|-------------------|------------|
| ARPV-68-12004 | +V | +12V | <4% | NA |
| ARPV-68-05004 | +V | +5V | <4% | NA |

3.2.3 Output Current

| Model | Output | Min.Load current | Max.Loadcurrent | Limit Current |
|---------------|--------|------------------|-----------------|---------------|
| ARPV-68-12004 | +V=12V | 0A | 0.34A | 0.6A |
| ARPV-68-05004 | +V=5V | 0A | 0.80A | 1.3A |

Regulation is measured by varying the line voltage from 100~240VAC, at full load.

| Model | Output | Tolerance |
|---------------|--------|-----------|
| ARPV-68-12004 | +V | <4% |
| ARPV-68-05004 | +V | <4% |

3.2.5 Load Regulation

Measured by varying the load current from MIN Load to FULL load at nominal AC input voltage. Measured at O/P power cord end. This measures output voltage variation of a unit due to load change and is indicative of design capability. The tolerance is measured with reference to the respective nominal voltage and expressed as percentage of nominal output voltage.

| Model | Output | Tolerance |
|---------------|--------|-----------|
| ARPV-68-12004 | +V | <5% |
| ARPV-68-05004 | +V | <5% |

3.2.6 Cross Regulation

Measured at 50% load on output while any other output load changed by 50%. ALL Models

3.2.7 Output Ripple And Noise Voltage (PAPD)

Measured At Full Load, 20MHz Bandwidth, With A 0.1uf Ceramic Cap and a 47uF Tent. Cap/E-Cap. Connected at the measurement point. The maximum PARD PK-PK ripple and noise is indicated below.

| Model | Output | Max pk-pk |
|---------------|--------|-----------|
| ARPV-68-12004 | +V=12V | <120 mV |
| ARPV-68-05004 | +V=5V | <80 mV |

3.2.8 Output Transient Response

The load current of measured output is changed between 10% to 100% max load for all models, at 0.1A/sec slew rate, at 100/120Hz, 50% duty cycle. The recovery time and excursion is measured when the output voltage has recovered to within 1% of the load regulation band. Expressed as percentage of the nominal voltage, The recovery time to regulation <1ms and Max. Excursion from regulation <3% when the all models nominal output voltage.

3.2.9 Output Transient Response

Long-term output voltage drift over 1000 hours of operation, at +V is typically less than 0.5%.

3.2.10 Output Overshoot

The overshoot voltage as a percentage of nominal output voltage at initial power up of the PSU, at 4.08W full load condition is indicated below. Measured with ref, to the O/P regulation band. The output overshoot <5% when the all models nominal output voltage.

3.2.11 Output Protection

The power supply load shall be protected against a fault condition described below.

3.2.11-1 Over Voltage N/A

3.2.11-2 Output Short Circuit / Overload Protection

The PSU shall be protected against overload as per section 3.2.3. The power supply will be protected against output short circuit. Short circuit current shall be less than 0A. Under all conditions. Output voltage of less than 50% +V constitutes a short. The PSU will self recover within a max. of 30 sec. After removal of the fault.

3.2.12 Output Rise Time

The time taken by the output to rise from 10% to 90% of the final steady state value, should be as below. The Max rise time<10ms, when the all models nominal output voltage.

3.2.13 Turn-On Delay

The run-on delay time, from the time AC power is applied to the PSU till the O/P voltage is within the regulation band. Shall be less than 2 seconds at 100VAC. Cold start.

3.2.14 Output Hold-Up- Time

The power supply shall maintain the output within it`s voltage/current specification for more than 10ms. After any loss of AC input voltage. Measured at nominal input voltage of 100-240VAC and at point when output is crossing regulation band.

3.2.15 Remote Sense N/A

3.2.16 Power Fall / Power Good Signal N/A

3.2.17 Temperature Coefficient

Temperature coefficient over the entire operating temperature range of 0~ to 40°C after one hour warm-up will be as follows. The temperature coefficient <2.4mV/°C when the all models nominal output voltage.

4 Environmental Requirements

4.1 Temperature

Operating temperature range is -10°C to 40°C at the respective rated output power, with free air convection. Surface temperature shall be less than 60°C at 25°C operating temperature. Non-operating range: -40°C to 85°C.

4.2 Altitude

Maximum operating altitude: 10,000 feet. Maximum Non-operating altitude: 40,000 feet.

4.3 Humidity

Non-condensing relative humidity range: 5% to 95%.

4.4.1 Vibration

The power supply shall meet operating, non-operating and package vibration

| Vibration | frequency | acceleration | tow time | cycle |
|---------------|-----------|--------------|----------------------|-------|
| Operating | 5-500Hz | 0.5G | 15min, xyz all 15min | 2 |
| Non-operating | 5-500Hz | 1G | 15min, xyz all 15min | 2 |
| Package | 5-500Hz | 1.5G | 15min, xyz all30min | 2 |

4.4.2 Shock

The power supply shall meet operating and non operating shock. On floorboards thick for 10mm wood block.

| Shock | height | direction | cycles |
|---------------|--------|-----------------|--------|
| Operating | 0.3m | xyz all 3 times | 6 |
| Non-operating | 1.0m | xyz all3 times | 6 |

4.5 Input Transient Susceptibility

The unit shall comply with requirements of IEC 1000-4-2, IEC 1000-4-4 and IEC 1000-4-5, will withstand ESD of 8K. Contact Discharge, will withstand ESD of 12K Air Discharge, 10 strikes, both +ve and -ve, as per IEC 1000-4-2.

4.6 AC-Line Input Inrush Noise

Minimum dielectric AC-line inrush voltage noise: Between AC input L to N:

| Inrush noise | Tr /Td | Voltage | Phase | time | cycles |
|--------------|------------|---------|-------|------|--------|
| Operating | 1.2us/50us | 2.0KV | 0° | 1min | 10 |
| | | | 90° | | 10 |
| | | | 270° | | 10 |
| | | | 360° | | 10 |

5 Safety Requirements

5.1 Dielectric Withstand Voltage

Minimum dielectric voltage: Between input to output: 3000VAC/1 minute. Leakage current shall be 5mA maximum.

5.2 Leakage Current

Maximum leakage current from primary to secondary shall be 0.25mA. Minimum voltage 240VAC

5.3 Insulation Resistance

Minimum insulation resistor from primary to secondary shall be 100MΩ. Voltage DC 500V.

5.4 Safety Spacing 6.4mm minimum between primary and secondary

5.5 Safety Standards Approval

The power supply will meet Class □, SELV of the following safety agency requirements

5.5 UL Standards

5.5.1 1. UL1492-2 edition The standard for audio-video products and accessories.

2. UL6500 edition The standard for products and accessories.

C-UL

1. CSA C22.2 No.1 Safety of radio, television and electrical equipment.

2. CSA C13.2 No.1 Safety of radio, television and electrical equipment.

3. CSA C22.2 No.950 Safety of information technology equipment, including electrical business equipment.

4. CSA-E65 The standard for information technology equipment, including electrical business equipment and associated equipment.

5.5.2 Marking

With the following marking: UL,C-UL, CE

5.6 Reliability

MTBF@ 25°C shall be 50,000 hours min.

6 EMI Requirements

EMI Requirements

EMI Standard: EN55022 CLASS B, EN6100-3-2.3, FCC CLASS B

6.1 Conduction

The adapter will conform to FCC PART15 Class B, VICC Class B, and CISPR Pub.13 Class B.

6.2 Radiation

The adapter will conform to FCC PART15 Class B, VICC Class B, and CISPR Pub.13 Class B.