


Features


- ✧ Small size of 1210
- ✧ Fast tripping resettable circuit protection
- ✧ Surface mount packaging for automated assembly
- ✧ Agency recognition: UL, CSA, TÜV

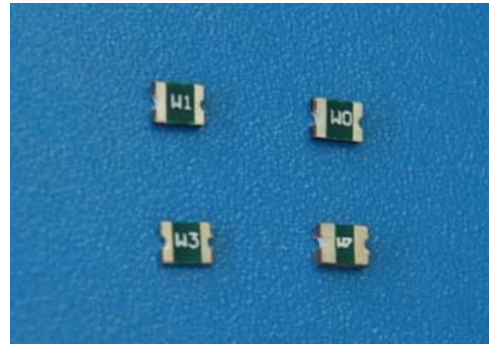

Product Dimensions

Size 3225mm/1210mils

Part number	A	B	C	D	E
	Max.	Max.	Max.	Min.	Min.
LP-USM005	3.43	2.80	1.25	0.25	0.20
LP-USM010	3.43	2.80	1.25	0.25	0.20
LP-USM020	3.43	2.80	1.25	0.25	0.20
LP-USM035	3.43	2.80	0.85	0.25	0.20
LP-USM050	3.43	2.80	0.85	0.25	0.20
LP-USM075	3.43	2.80	1.30	0.25	0.20
LP-USM110	3.43	2.80	1.30	0.25	0.20
LP-USM150	3.43	2.80	1.80	0.25	0.20
LP-USM175	3.43	2.80	1.80	0.25	0.20
LP-USM200	3.43	2.80	1.80	0.25	0.20

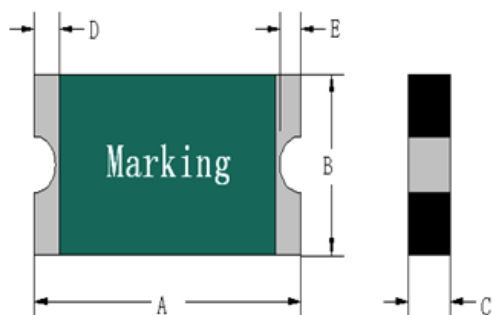


Thermal Derating Chart-IH(A)

Size 3225mm/1210mils

Part number	Maximum ambient operating temperatures(°C)									
	-40	-20	0	20	25	40	50	60	70	85
LP-USM005	0.09	0.07	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.02
LP-USM010	0.16	0.14	0.13	0.11	0.10	0.09	0.07	0.07	0.06	0.05
LP-USM020	0.32	0.26	0.24	0.21	0.20	0.16	0.15	0.14	0.11	0.09
LP-USM035	0.52	0.48	0.41	0.38	0.35	0.32	0.27	0.26	0.23	0.17
LP-USM050	0.76	0.65	0.57	0.51	0.50	0.44	0.37	0.35	0.29	0.24
LP-USM075	1.11	1.00	0.87	0.77	0.75	0.66	0.58	0.53	0.46	0.36
LP-USM110	1.64	1.46	1.29	1.13	1.10	0.96	0.85	0.74	0.63	0.53
LP-USM150	2.25	2.02	1.76	1.54	1.50	1.29	1.10	1.00	0.87	0.67
LP-USM175	2.61	2.33	2.03	1.78	1.75	1.51	1.42	1.32	1.11	0.92
LP-USM200	2.89	2.65	2.43	2.04	2.00	1.70	1.52	1.42	1.23	0.97

Typical Time-to-Trip Charts at 25°C

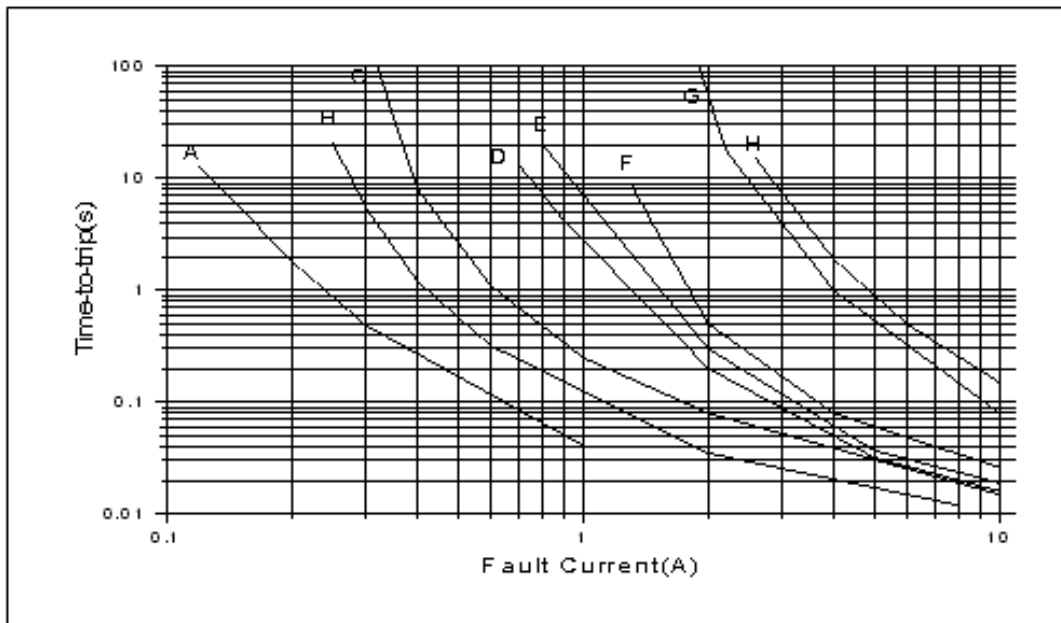

LP-USM Series

- A = USM005
- B = USM010
- C = USM020
- D = USM035
- E = USM050
- F = USM075
- G = USM110
- H = USM150

Electrical Characteristics at 25°C

Size 3225mm/1210 mils

Part number	I_H (A)	I_T (A)	V_{max} (V)	I_{max} (A)	Max.Time-to-trip (A)	P_{dtyp} (S)	R_{min} (W)	R_{1max} (Ω)	R_{1max} (Ω)
LP-USM005	0.05	0.15	30	10	0.25	1.50	1	3.600	50.00
LP-USM010	0.10	0.30	30	10	0.5	1.50	1	1.600	15.00
LP-USM020	0.20	0.40	30	10	8.0	0.02	1	0.800	5.000
LP-USM035	0.35	0.70	6	40	8.0	0.20	1	0.320	1.300
LP-USM050	0.50	1.00	13.2	40	8.0	0.10	1	0.250	0.900
LP-USM075	0.75	1.50	6	40	8.0	0.10	1	0.130	0.400
LP-USM110	1.10	2.20	6	40	8.0	0.30	1	0.060	0.210
LP-USM150	1.50	3.00	6	40	8.0	0.50	1	0.040	0.110
LP-USM175	1.75	3.50	6	40	8.0	0.80	0.8	0.025	0.080
LP-USM200	2.00	4.00	6	100	8.0	2.50	0.8	0.020	0.060

I_H =Hold current: maximum current at which the device will not trip at 25°C still air.

I_T =Trip current: minimum current at which the device will always trip at 25°C still air.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

T_{trip} =Maximum time to trip at assigned current.


P_{dtyp} =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min} =Minimum device resistance at 25°C prior to tripping.


R_{1max} =Maximum device resistance measured in the nontripped state 1 hour post reflow.

Marking System

Part Marking System

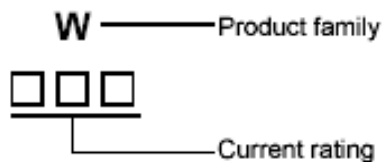

Part Numbering System

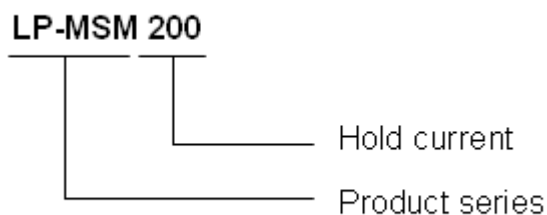

Test Procedures And Requirements



Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, V_{max} , 25°C	$T \leq$ maximum Time to Trip
Hold Current	30min, at I_H	No trip
Trip Cycle Life	V_{max} , I_{max} , 100cycles	No arcing or burning
Trip Endurance	V_{max} , 24hours	No arcing or burning

Packaging and Marking Information

Size 3225mm/1210 mils

Part number	Tape & Reel Quantity	Tape spc code	Part Marking	Recommended Pad Layout Figures[mm(In.)]						Agency Recognition
				Dimension A(Nom.)		Dimension B(Nom.)		Dimension C(Nom.)		
				mm	(In.)	mm	(In.)	mm	(In.)	
LP-USM005	4000	1210A	W0	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM010	4000	1210A	W1	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM020	4000	1210A	W2	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM035	4000	1210A	W3	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM050	4000	1210A	W4	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM075	4000	1210A	W5	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM110	4000	1210A	W6	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM150	3000	1210B	W7	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	UL,CSA,TUV
LP-USM175	3000	1210B	W9	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	Pending
LP-USM200	3000	1210B	W8	2.00	(0.081)	1.00	(0.041)	2.50	(0.101)	Pending

Solder Pad Layouts

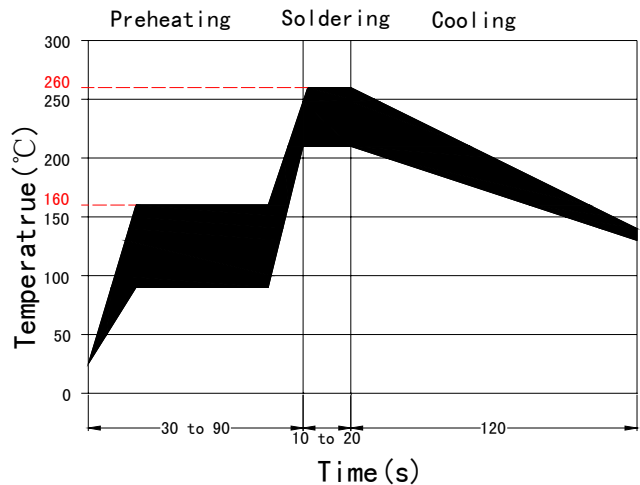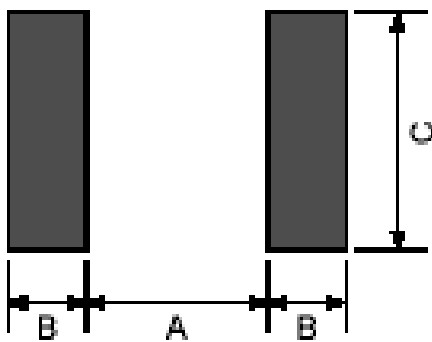

* Recommended reflow methods: IR, Vapor phase oven, hot air oven, wave solder.


* Devices can be cleaned using standard industry methods and solvents.

Notes:

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


Tape Specification And Reel Dimensions

Tape spc code	W	P0	P1	P2	A	B	D	F	E	T	K
1210(A)	8.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	2.82 ± 0.10	3.46 ± 0.10	1.55 ± 0.05	3.50 ± 0.10	1.75 ± 0.10	0.22 ± 0.05	1.00 ± 0.10
1210(B)	8.00 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	2.82 ± 0.10	3.46 ± 0.10	1.55 ± 0.05	3.50 ± 0.10	1.75 ± 0.10	0.22 ± 0.05	1.25 ± 0.10

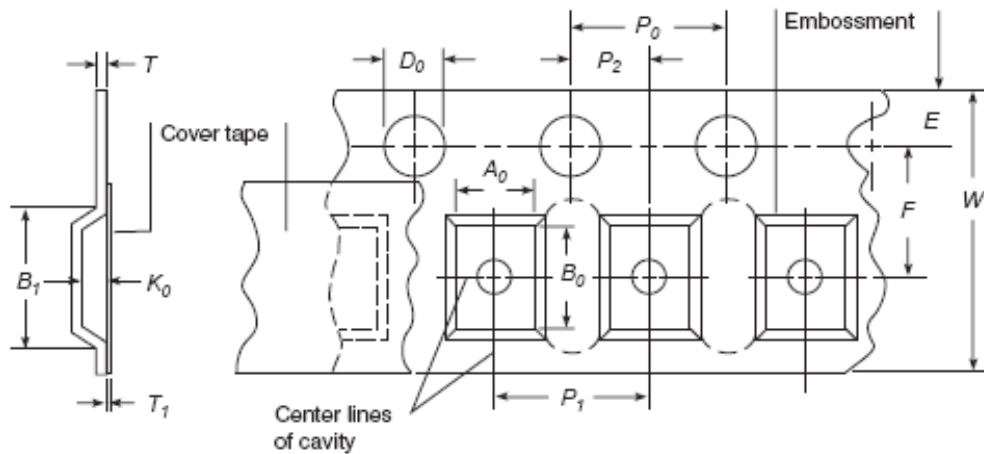

Reel Dimensions

Tape spc code	A	N	W1	W2
1210(A)	$180+0/-1.5$	$60+1/-0$	$9.0+1/-0$	$13.0+1/-0$
1210(B)	$180+0/-1.5$	$60+1/-0$	$9.0+1/-0$	$13.0+1/-0$

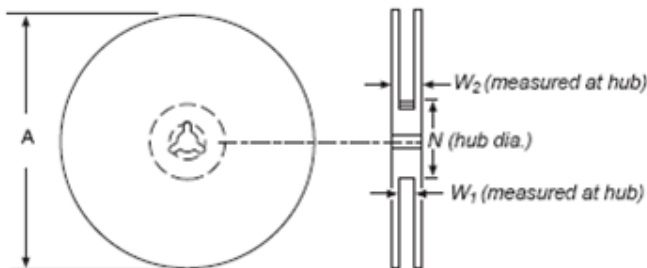

Storage

The maximum ambient temperature shall not exceed 40°C. Storage temperatures higher than 40°C could result in the deformation of packaging materials. The maximum relative humidity recommended for storage is 70%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components. Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use. The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.

Warning:

PPTC devices are intended for protection against occasional over-current or over-temperature fault conditions, and should not be used when repeated fault conditions are anticipated. Operation beyond maximum ratings or improper use may result in device damage and possible electrical arcing and flame.

Notes:

The specification is intended to present application, product and technical data to assist the user in selecting PPTC circuit production devices. However, users should independently evaluate and test the suitability of each product. Wayon makes no warranties as to the accuracy or completeness of the information and disclaims any liability resulting from its use. Wayon's only obligations are those in the Wayon Standard Terms and Conditions of Sale and in no case will Wayon be liable for any incidental, indirect, or consequential damages arising from the sale, resale, or misuse of its products. Wayon reserves the right to change or update, without notice, any information contained in this specification.