


RH01

(RH01 SERIES)

THERMAL CUT OFF

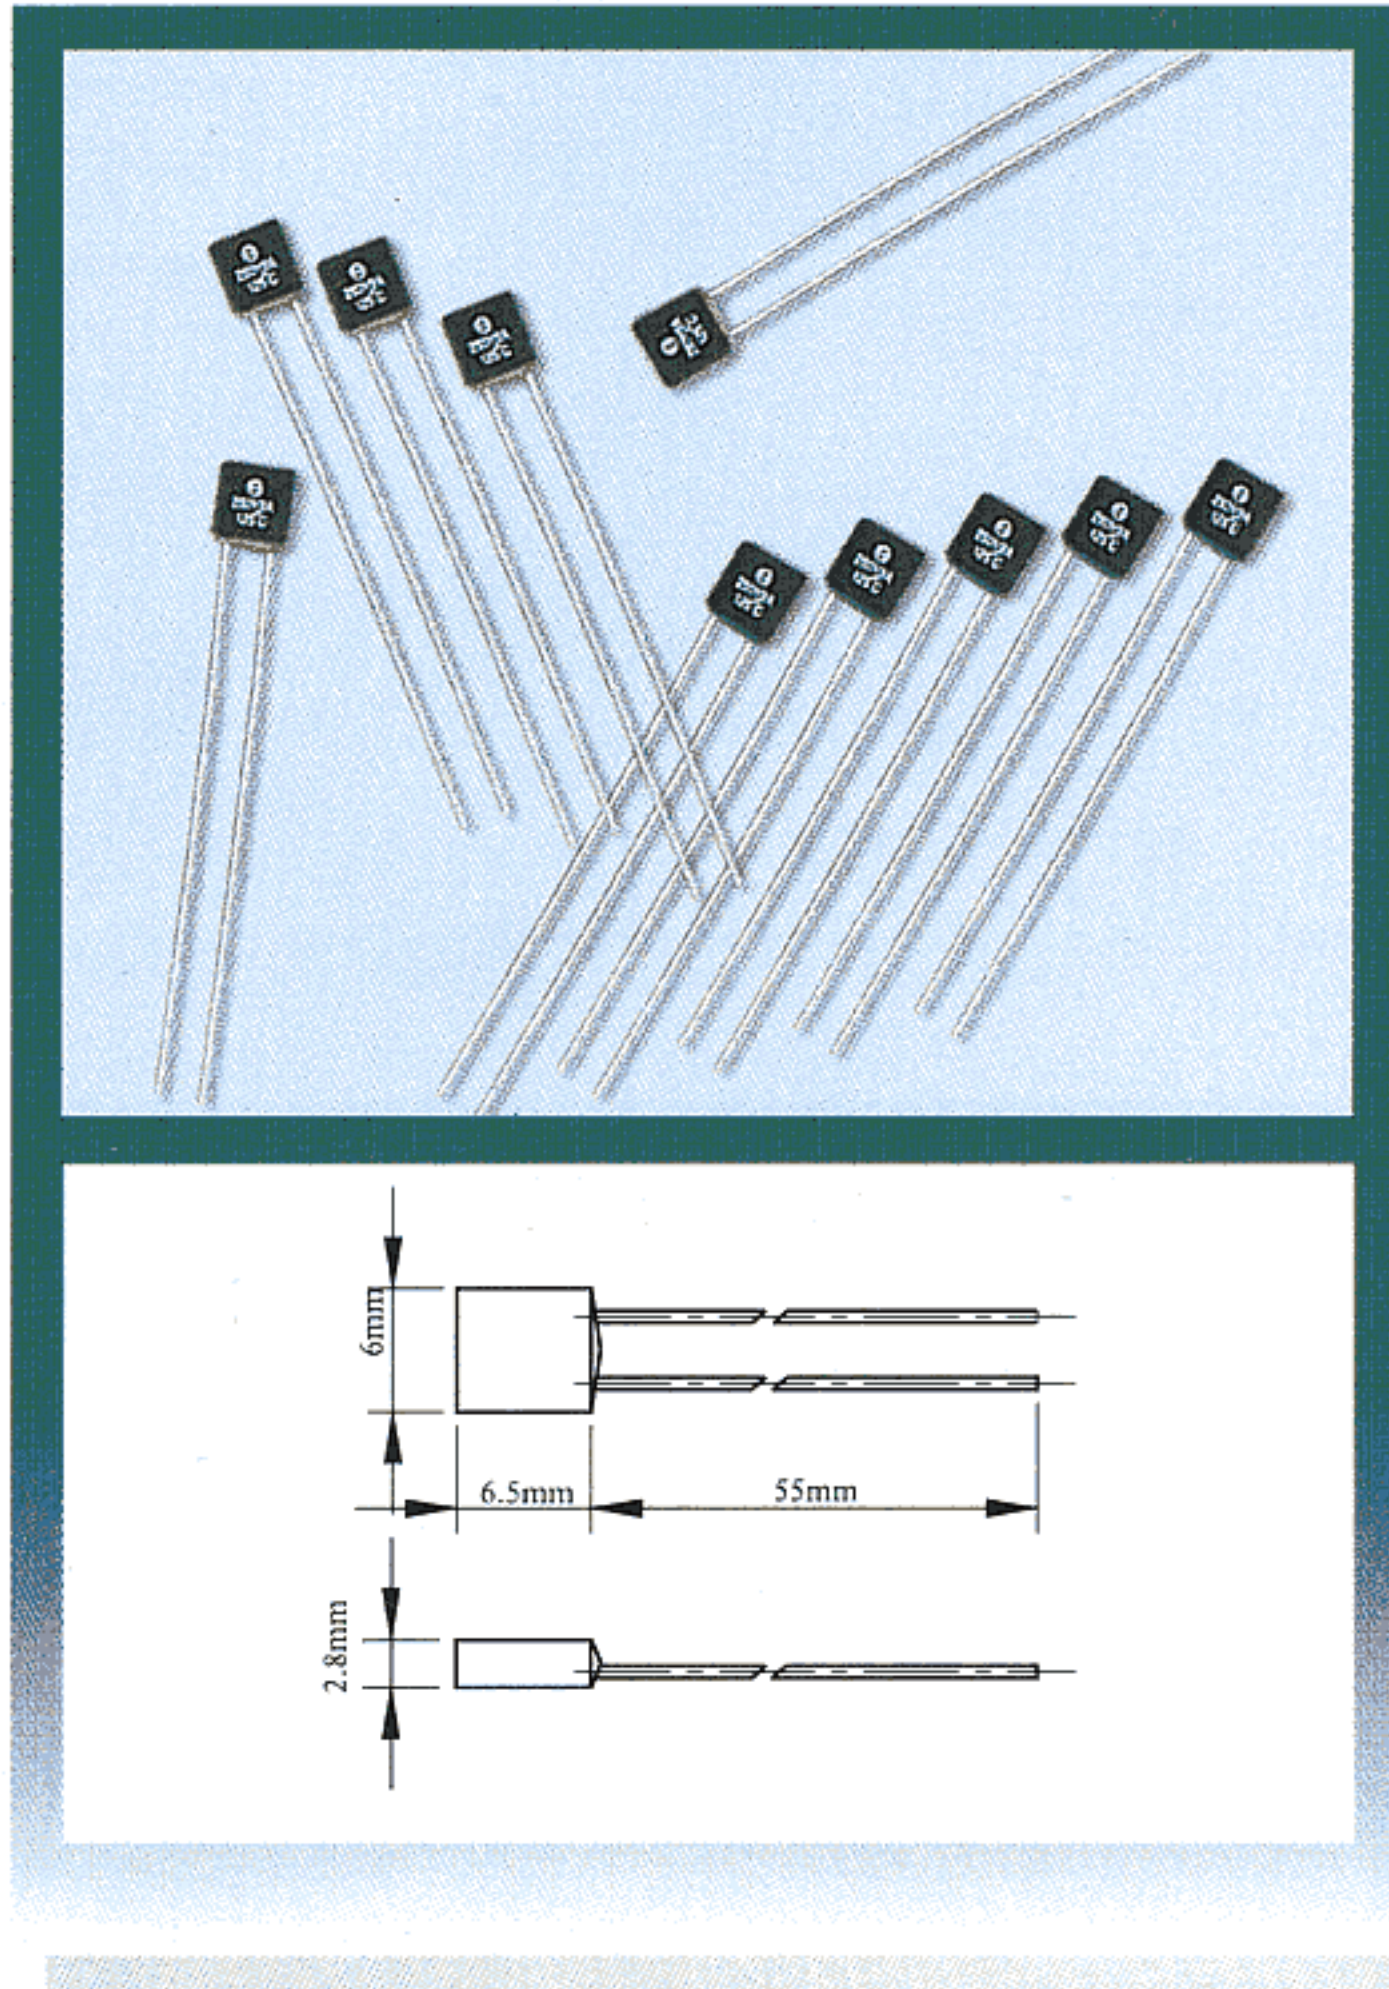

RH01 (D-SERIES)

Catalog No.	Rated Functioning Temp. Tf(°C)	Fusing-Off Temp. (°C)	Holding Tc (°C)	Max Temp. Limit Tm (°C)	Voltage Ac (V)	Current (A)	APPROVALS
							CCC
RH01-83	83	80+2/-5	50	150	250	1, 2, 3	●
RH01-90	90	88+2/-4	55	150	250	1, 2, 3	●
RH01-95	95	92+2/-4	65	150	250	1, 2, 3	●
RH01-100	100	97+2/-3	70	150	250	1, 2, 3	●
RH01-105	105	100+3/-2	75	180	250	1, 2, 3	●
RH01-110	110	105 ± 3	75	180	250	1, 2, 3	●
RH01-115	115	110+2/-3	80	180	250	1, 2, 3	●
RH01-120	120	115 ± 3	80	180	250	1, 2, 3	●
RH01-123	123	117 ± 3	80	180	250	1, 2, 3	●
RH01-125	125	120 ± 3	95	180	250	1, 2, 3	●
RH01-130	130	127 ± 3	100	180	250	1, 2, 3	●
RH01-135	135	132+3/-5	105	180	250	1, 2, 3	●
RH01-140	140	135 ± 3	105	180	250	1, 2, 3	●
RH01-142	142	138 ± 3	110	180	250	1, 2, 3	●
RH01-145	145	140 ± 3	110	180	250	1, 2, 3	●
RH01-150	150	145 ± 3	115	180	250	1, 2, 3	●
RH01-152	152	147 ± 3	115	180	250	1, 2, 3	●