

0603FT

**H 0603FT**

表面贴装片式保险丝(速断型)

SURFACE MOUNT CHIP FUSE (FAST-ACTING)

| 目录编号<br>CATALOG NO. | 额定电流<br>CURRENT RATING<br>(代码 MARKING CODE) | 额定电压<br>VOLTAGE RATING | 安全认证<br>SAFETY APPROVALS |     |
|---------------------|---|------------------------|--------------------------|-----|
|                     |   |                        | UR                       | CUR |
| 0603FT-0500L        | 500mA (F)                                   | 32V                    | ○                        | ○   |
| 0603FT-0750L        | 750mA (G)                                   | 32V                    | ○                        | ○   |
| 0603FT-010L         | 1A (H)                                      | 32V                    | ○                        | ○   |
| 0603FT-013L         | 1.25A (J)                                   | 32V                    | ○                        | ○   |
| 0603FT-015L         | 1.5A (K)                                    | 32V                    | ○                        | ○   |
| 0603FT-020L         | 2A (N)                                      | 32V                    | ○                        | ○   |
| 0603FT-025L         | 2.5A (O)                                    | 32V                    | ○                        | ○   |
| 0603FT-030L         | 3A (P)                                      | 32V                    | ○                        | ○   |
| 0603FT-040L         | 4A (S)                                      | 32V                    | ○                        | ○   |
| 0603FT-050L         | 5A (T)                                      | 32V                    | ○                        | ○   |

L DENOTES FOR 32V(L 表示 32V)

○ DENOTES FOR PENDING (○ 表示申请中)

分断电流:

INTERRUPTING RATING:  
35A 32V DC



电气特性 ELECTRICAL CHARACTERISTICS:

| 额定电流的%<br>% of CURRENT RATING | 熔断时间 BLOWING TIME       |
|-------------------------------|-------------------------|
| 100%                          | 最快4小时 4 hours Min.      |
| 200%                          | 最慢120秒 120 seconds Max. |
| 250%                          | 最慢5秒 5 seconds Max.     |

包装 PACKING:


5,000 PIECES TAPED AND REELED IN ONE BOX  
每卷5,000只保险丝, 装入一个包装盒

包装盒尺寸  
BOX SIZE

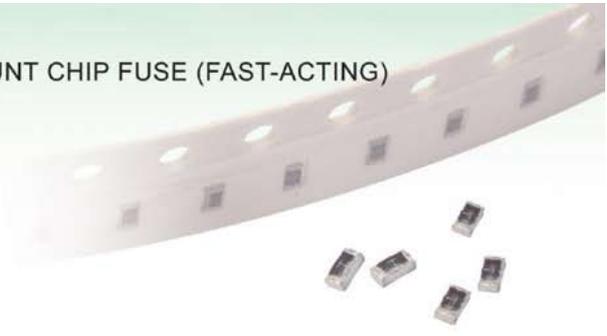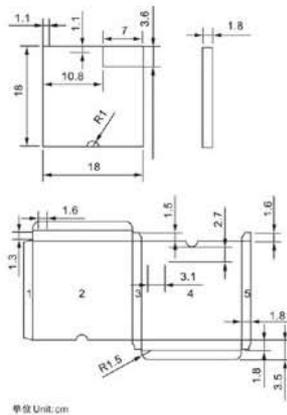


尺寸 DIMENSIONS:

上面 TOP VIEW:

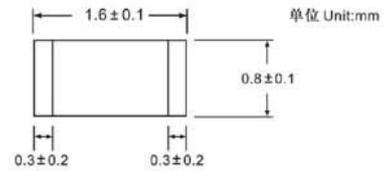

侧面 SIDE VIEW:



0603FT RoHS I-T CHARACTERISTICS CURVE  
0603FT RoHS 电流-时间曲线图

