




WS05M-B through WS36M-B

Transient Voltage Suppressor

Features

- 350 watts peak pulse power ($t_p = 8/20\mu s$)
- ESD Protection > 40 kilovolts
- Protects one bidirectional line or two unidirectional lines
- Working Voltages: 5V, 12V, 15V, 24V and 36V
- Low clamping voltages

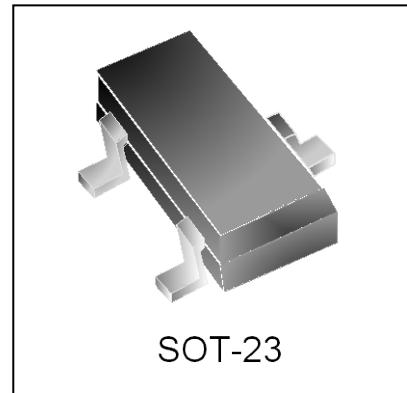

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 15kV$ (air), $\pm 8kV$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 9.5A (8/20 μs)


Mechanical Characteristics

- JEDEC SOT-23 package
- Molding compound flammability rating: UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS/WEEE Compliant
- Pb-Free Packages are Available


Applications

- Automotive Networks
- Control & Monitoring Systems
- Portable Electronics
- Set-Top Box
- Servers, Notebook, and Desktop PC
- Wireless Bus Protection

Circuit Diagram

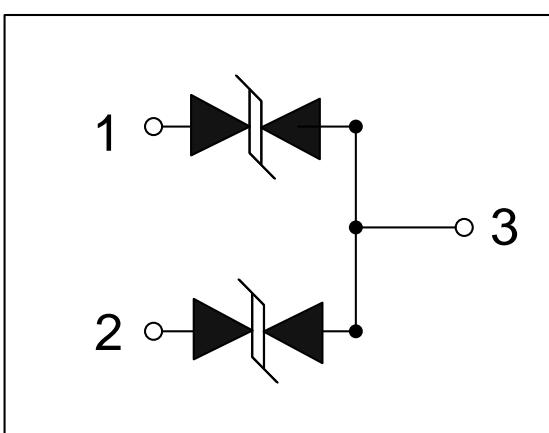


Schematic & PIN Configuration

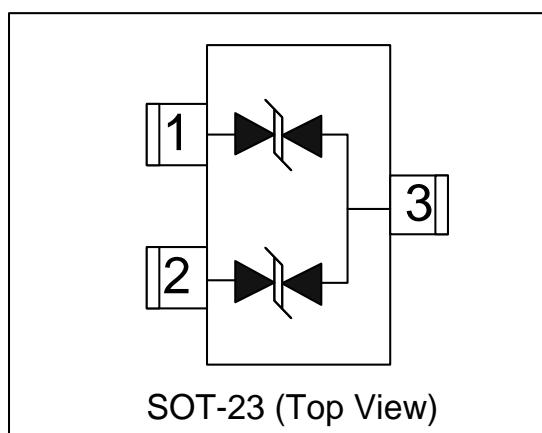

Absolute Maximum Rating			
Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PP}	350	Watts
Lead Soldering Temperature	T_L	260(10sec)	°C
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters ($T=25^\circ C$)

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

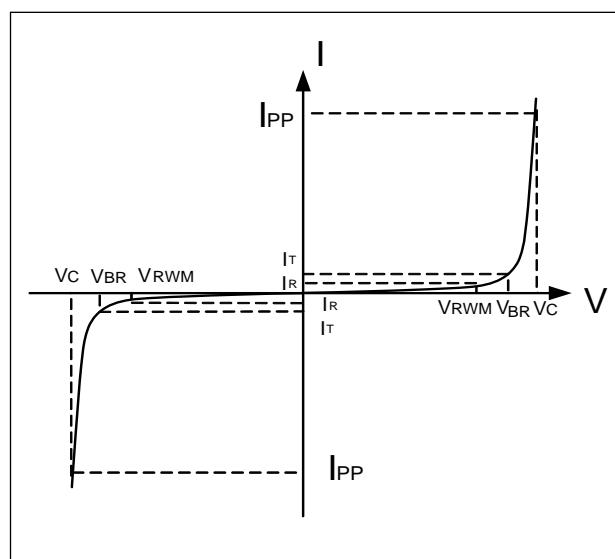

Electrical Characteristics

WS05M-B						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	6			V
Reverse Leakage Current	I_R	$V_{RWM}=5V, T=25^\circ C$			1	µA
Peak Pulse Current	I_{PP}	$t_p = 8/20\mu s$			18	A
Clamping Voltage	V_C	$I_{PP}=1A, t_p=8/20\mu s$			10.8	V
Maximum Clamping Voltage	V_C	$I_{PP}=18A, t_p=8/20\mu s$			19.6	V
Junction Capacitance	C_j	Pin 1 to 3 or Pin 2 to 3 $VR = 0V, f = 1MHz$		50		pF

Electrical Characteristics (Cont)

WS12M-B						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				12	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	13.3			V
Reverse Leakage Current	I_R	$V_{RWM}=12\text{V}, T=25^\circ\text{C}$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			12	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			21	V
Maximum Clamping Voltage	V_C	$I_{PP}=12\text{A}, t_p=8/20\mu\text{s}$			29	V
Junction Capacitance	C_j	Pin 1 to 3 or Pin 2 to 3 $V_R = 0\text{V}, f = 1\text{MHz}$		20		pF

WS15M-B

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				15	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	16.7			V
Reverse Leakage Current	I_R	$V_{RWM}=15\text{V}, T=25^\circ\text{C}$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			10	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			24	V
Maximum Clamping Voltage	V_C	$I_{PP}=10\text{A}, t_p=8/20\mu\text{s}$			30	V
Junction Capacitance	C_j	Pin 1 to 3 or Pin 2 to 3 $V_R = 0\text{V}, f = 1\text{MHz}$		15		pF





WS24M-B

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				24	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	26.7			V
Reverse Leakage Current	I_R	$V_{RWM}=24\text{V}, T=25^\circ\text{C}$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			6	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			45	V
Maximum Clamping Voltage	V_C	$I_{PP}=6\text{A}, t_p=8/20\mu\text{s}$			60	V
Junction Capacitance	C_j	Pin 1 to 3 or Pin 2 to 3 $V_R = 0\text{V}, f = 1\text{MHz}$		12		pF

WS36M-B

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				36	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	40			V
Reverse Leakage Current	I_R	$V_{RWM}=36\text{V}, T=25^\circ\text{C}$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			4.5	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			60	V
Maximum Clamping Voltage	V_C	$I_{PP}=4.5\text{A}, t_p=8/20\mu\text{s}$			75	V
Junction Capacitance	C_j	Pin 1 to 3 or Pin 2 to 3 $V_R = 0\text{V}, f = 1\text{MHz}$		10		pF

Typical Characteristics

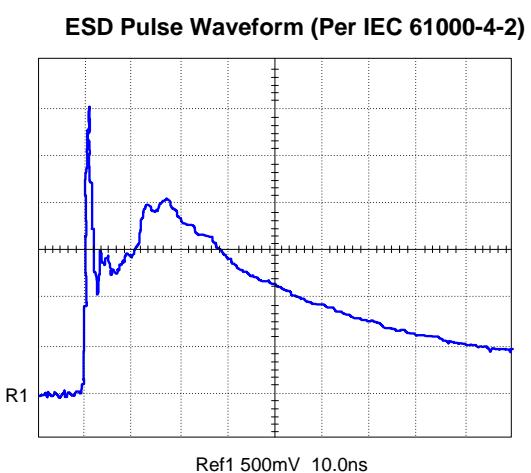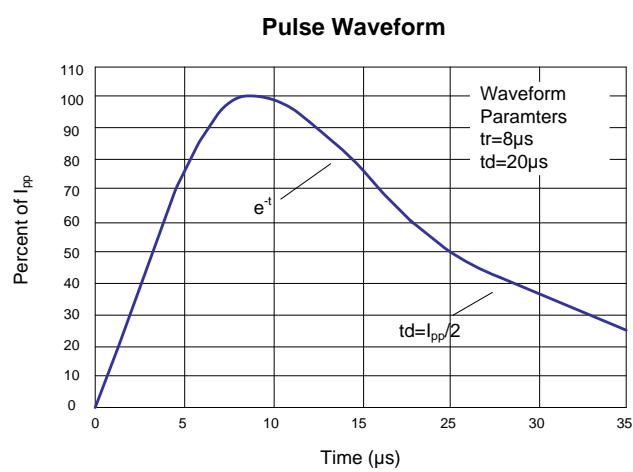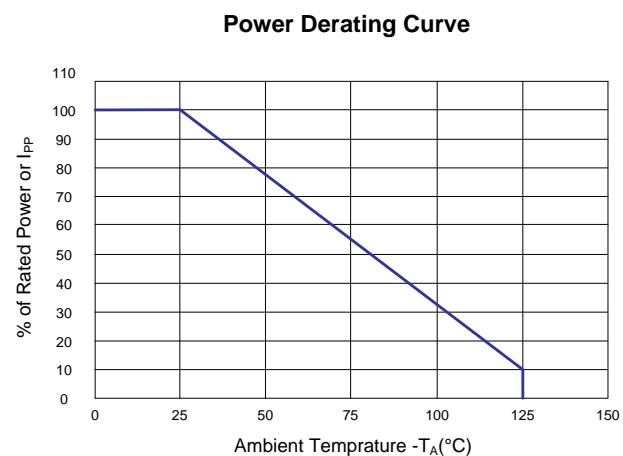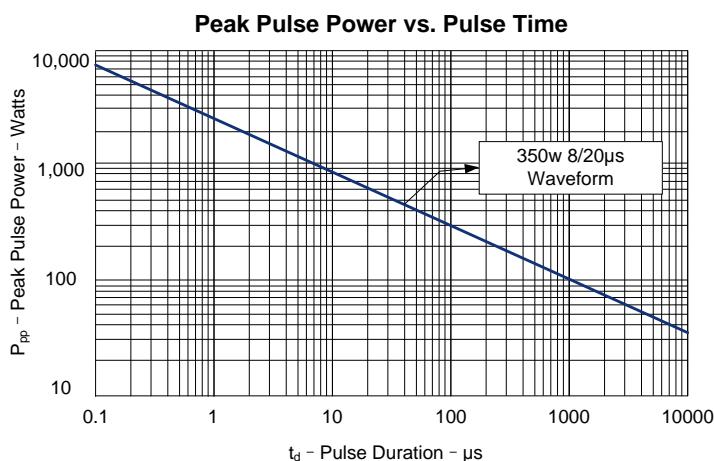

Outline Drawing – SOT-23

PACKAGE OUTLINE		SOT-23			
SYMBOL	DIMMETER		INCHES		
	MIN	MAX	MIN	MAX	
A	0.89	1.13	0.035	0.044	
A1	0.015	0.11	0.0006	0.0043	
A2	0.60	0.70	0.0236	0.0275	
D	2.72	3.12	0.1070	0.1228	
E	2.60	3.00	0.1024	0.118	
E1	1.40	1.80	0.0551	0.0709	
e	0.95 BSC		0.0374 BSC		
L	0.30	0.60	0.0118	0.0236	
θ	0	8°	0	8	

DIMENSIONS		
DIM	INCHES	MILLIMETERS
M	0.101	2.60
C	0.0058	0.15
Z	0.109	2.80
e	0.037 BSSC	0.95 BSC
e1	0.074 BSC	1.9 BSC
b	0.0389	0.35

Notes

- Dimensioning and tolerances per ANSI Y14.5M, 1985.
- Controlling Dimension: Inches
- Pin 3 is the cathode (Unidirectional Only).
- Dimensions are exclusive of mold flash and metal burrs.

Marking Codes

Part Number	WS05M-B	WS12M-B	WS15M-B	WS24M-B	WS36M-B
Marking Code	05MB	12MB	15MB	24MB	36MB