



WS05M2T through WS36M2T


Transient Voltage Suppressor

Features

- 300 watts peak pulse power ($t_p = 8/20\mu s$)
- ESD Protection > 40 kilovolts
- Protects one bidirectional line or two unidirectional lines
- Working Voltages: 5V, 12V, 15V, 24V and 36V
- Low clamping voltages

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 15kV$ (air), $\pm 8kV$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 18A (8/20 μs)

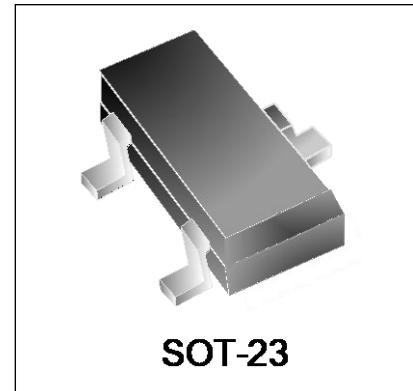


Mechanical Characteristics

- JEDEC SOT23 package
- Molding compound flammability rating:
UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS/WEEE Compliant


Applications

- RS-232, RS-422 & RS-485
- Cellular Handsets and Accessories
- Control & Monitoring Systems
- Portable Electronics
- Set-Top Box
- Servers, Notebook, and Desktop PC
- Wireless Bus Protection

Circuit Diagram

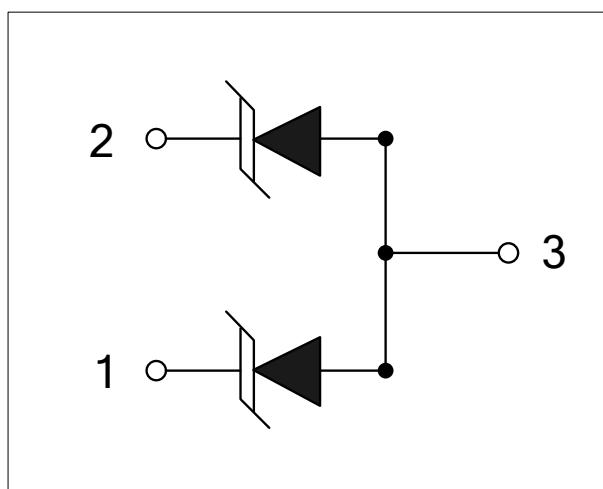

Schematic & PIN Configuration

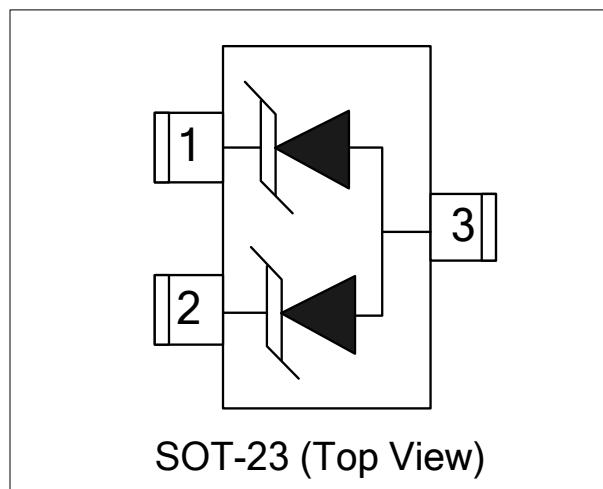


Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PP}	300	Watts
Lead Soldering Temperature	T_L	260(10sec)	°C
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters ($T=25^\circ C$)

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

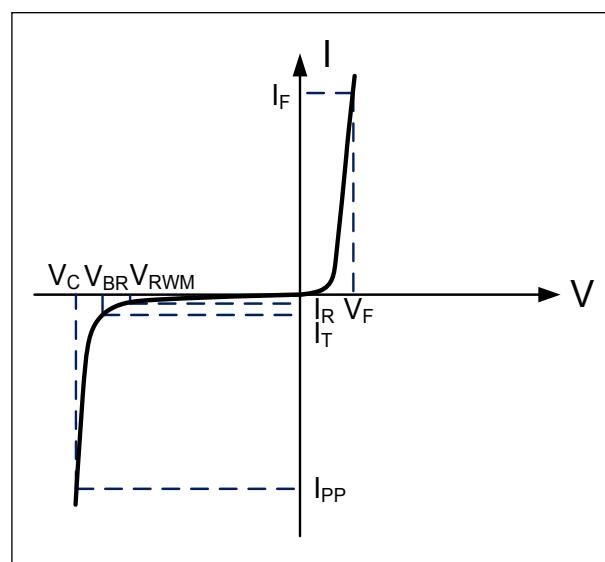

Electrical Characteristics

WS05M2T						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	6			V
Reverse Leakage Current	I_R	$V_{RWM}=5V, T=25^\circ C$			1	μA
Peak Pulse Current	I_{PP}	$t_p = 8/20\mu s$			18	A
Clamping Voltage	V_C	$I_{PP}=1A, t_p=8/20\mu s$			9.8	V
Maximum Clamping Voltage	V_C	$I_{PP}=18A, t_p=8/20\mu s$			16.7	V
Junction Capacitance	C_j	Pin 1 to 2 $V_R = 0V, f = 1MHz$		100		pF
Junction Capacitance	C_j	Pin 1 to 3 and Pin 2 to 3 $V_R = 0V, f = 1MHz$		150		pF

WS12M2T

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				12	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	13.3			V
Reverse Leakage Current	I_R	$V_{RWM}=12\text{V}, T=25^\circ\text{C}$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			12	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			19	V
Maximum Clamping Voltage	V_C	$I_{PP}=12\text{A}, t_p=8/20\mu\text{s}$			25	V
Junction Capacitance	C_j	Pin 1 to 2 $V_R = 0\text{V}, f = 1\text{MHz}$		30		pF
Junction Capacitance	C_j	Pin 1 to 3 and Pin 2 to 3 $V_R = 0\text{V}, f = 1\text{MHz}$		50		pF

WS15M2T

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				15	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	16.7			V
Reverse Leakage Current	I_R	$V_{RWM}=15\text{V}, T=25^\circ\text{C}$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			10	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			24	V
Maximum Clamping Voltage	V_C	$I_{PP}=10\text{A}, t_p=8/20\mu\text{s}$			30	V
Junction Capacitance	C_j	Pin 1 to 2 $V_R = 0\text{V}, f = 1\text{MHz}$		25		pF
Junction Capacitance	C_j	Pin 1 to 3 and Pin 2 to 3 $V_R = 0\text{V}, f = 1\text{MHz}$		40		pF





WS24M2T

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				24	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	26.7			V
Reverse Leakage Current	I_R	$V_{RWM}=24\text{V}, T=25^\circ\text{C}$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$			5	A
Clamping Voltage	V_C	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			43	V
Maximum Clamping Voltage	V_C	$I_{PP}=5\text{A}, t_p=8/20\mu\text{s}$			60	V
Junction Capacitance	C_j	Pin 1 to 2 $V_R = 0\text{V}, f = 1\text{MHz}$		20		pF
Junction Capacitance	C_j	Pin 1 to 3 and Pin 2 to 3 $V_R = 0\text{V}, f = 1\text{MHz}$		30		pF

WS36M2T


Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V _{RWM}				36	V
Reverse Breakdown Voltage	V _{BR}	I _T =1mA	40			V
Reverse Leakage Current	I _R	V _{RWM} =36V, T=25°C			1	µA
Peak Pulse Current	I _{PP}	t _p =8/20µs			4	A
Clamping Voltage	V _C	I _{PP} =1A, t _p =8/20µs			60	V
Maximum Clamping Voltage	V _C	I _{PP} =4A, t _p =8/20µs			75	V
Junction Capacitance	C _j	Pin 1 to 2 V _R = 0V, f = 1MHz		20		pF
Junction Capacitance	C _j	Pin 1 to 3 and Pin 2 to 3 V _R = 0V, f = 1MHz		26		pF

Typical Characteristics

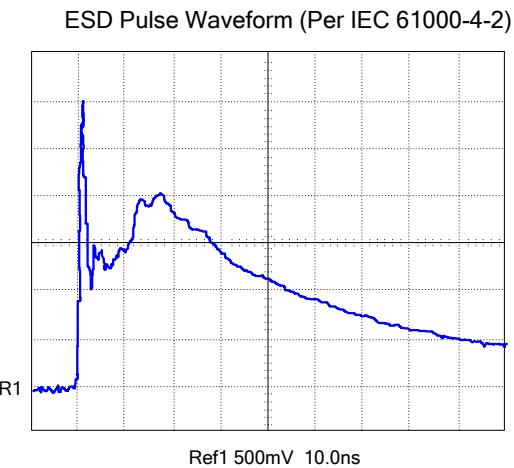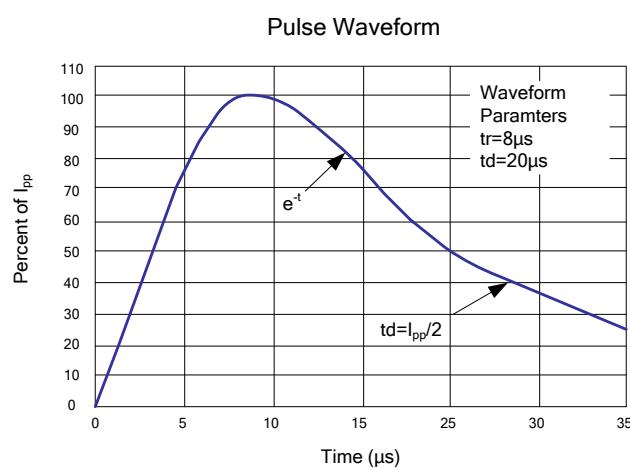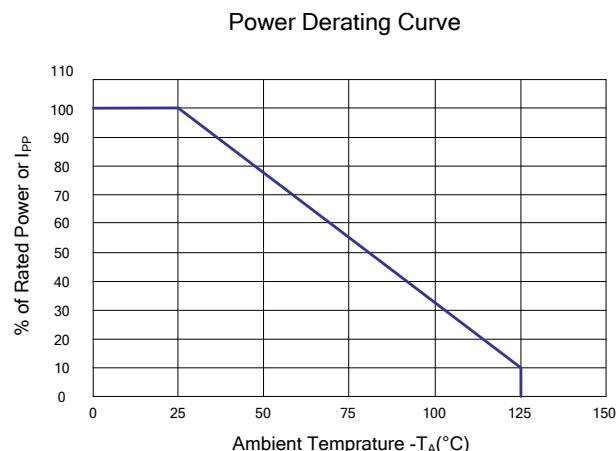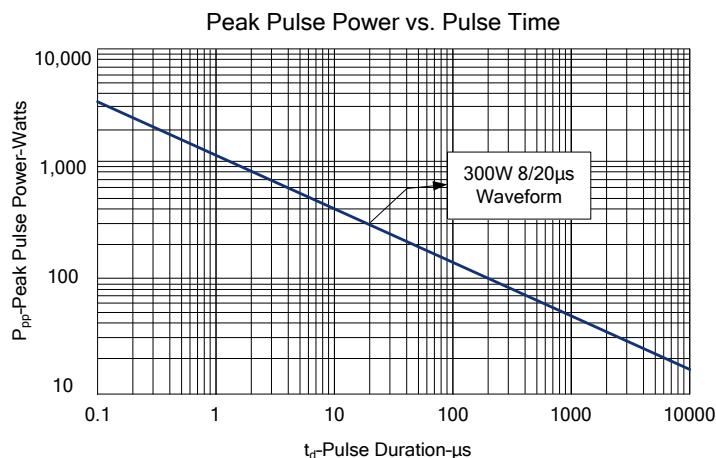

Outline Drawing – SOT-23

PACKAGE OUTLINE		DIMENSIONS			
SYMBOL	MILLIMETER		INCHES		
	MIN	MAX	MIN	MAX	
A	0.900	1.150	0.035	0.045	
A1	0.000	0.100	0.000	0.004	
A2	0.900	1.050	0.035	0.041	
D	2.800	3.000	0.110	0.118	
b	0.300	0.500	0.012	0.020	
E	2.250	2.550	0.089	0.100	
E1	1.200	1.400	0.047	0.055	
e	0.950 BSC		0.037 BSC		
L	0.300	0.500	0.012	0.020	
θ	0	8°	0	8°	

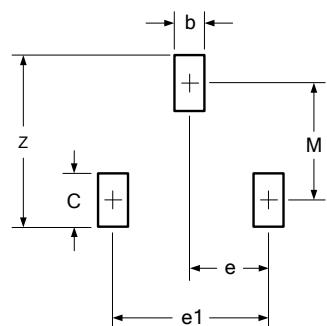

DIMENSIONS		
DIM	INCHES	MILLIMETERS
M	0.088	2.20
C	0.0058	0.15
Z	0.093	2.35
e	0.037 BSC	0.95 BSC
e1	0.074 BSC	1.9 BSC
b	0.0389	0.35

Notes

- Dimensioning and tolerances per ANSI Y14.5M, 1985.
- Controlling Dimension: Inches
- Pin 3 is the cathode (Unidirectional Only).
- Dimensions are exclusive of mold flash and metal burrs.

Marking Codes

Part Number	WS05M2T	WS12M2T	WS15M2T	WS24M2T	WS36M2T
Marking Code	5M2	AM2	BM2	CM2	DM2