


Features


- ✦ Small size of 1206
- ✦ Fast tripping resettable circuit protection
- ✦ Surface mount packaging for automated assembly
- ✦ Agency recognition: UL, CSA, TÜV

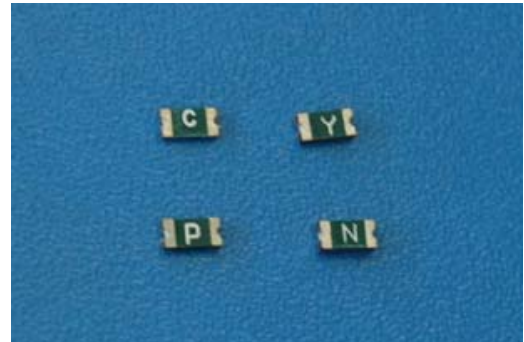

Product Dimensions

Size 3216mm/1206mils

Part number	A	B	C	D	E
	Max.	Max.	Max.	Min.	Min.
LP-NSM005	3.50	1.80	0.85	0.10	0.20
LP-NSM012	3.50	1.80	0.85	0.10	0.20
LP-NSM016	3.50	1.80	0.85	0.10	0.20
LP-NSM020	3.50	1.80	0.85	0.10	0.20
LP-NSM035	3.50	1.80	0.85	0.10	0.20
LP-NSM050	3.50	1.80	0.85	0.10	0.20
LP-NSM075	3.50	1.80	1.30	0.10	0.20
LP-NSM110	3.50	1.80	1.30	0.10	0.20
LP-NSM150	3.50	1.80	1.80	0.10	0.20
LP-NSM200	3.50	1.80	1.80	0.10	0.20

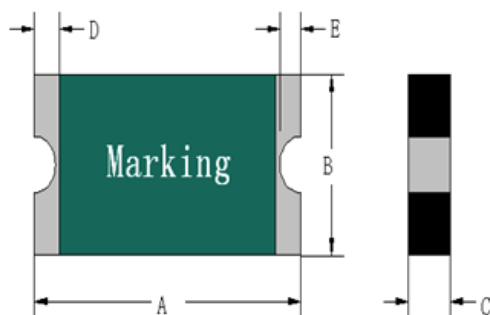


Thermal Derating Chart-IH(A)

Size 3216mm/1206mils

Part number	Maximum ambient operating temperatures(°C)									
	-40	-20	0	20	25	40	50	60	70	85
LP-NSM005	0.09	0.08	0.06	0.05	0.05	0.04	0.03	0.03	0.03	0.02
LP-NSM012	0.19	0.16	0.14	0.13	0.125	0.10	0.09	0.08	0.07	0.04
LP-NSM016	0.25	0.20	0.18	0.16	0.16	0.14	0.12	0.11	0.09	0.06
LP-NSM020	0.31	0.26	0.22	0.21	0.20	0.18	0.16	0.15	0.13	0.07
LP-NSM035	0.51	0.46	0.39	0.36	0.35	0.30	0.27	0.26	0.20	0.16
LP-NSM050	0.77	0.64	0.56	0.52	0.50	0.45	0.40	0.35	0.32	0.23
LP-NSM075	1.12	1.01	0.88	0.78	0.75	0.66	0.58	0.53	0.46	0.33
LP-NSM110	1.61	1.44	1.27	1.12	1.10	0.94	0.85	0.77	0.63	0.48
LP-NSM150	2.21	1.97	1.72	1.53	1.50	1.27	1.11	1.00	0.89	0.69
LP-NSM200	2.61	2.42	2.34	2.06	2.00	1.78	1.66	1.49	1.42	1.09

Typical Time-to-Trip Charts at 25°C

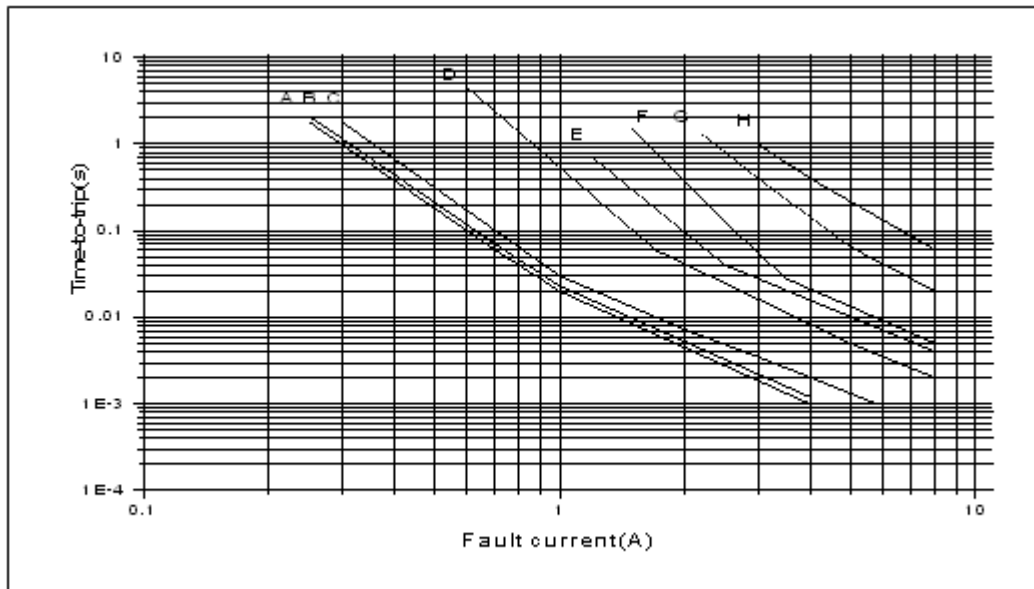

LP-NSM Series

- A = LP-NSM012
- B = LP-NSM016
- C = LP-NSM020
- D = LP-NSM035
- E = LP-NSM050
- F = LP-NSM075
- G = LP-NSM110
- H = LP-NSM150


Electrical Characteristics at 25°C

Size 3216mm/1206mils


Part number	I_H	I_T	V_{max}	I_{max}	Max.Time-to-trip	Pdtyp	R_{min}	R_{1max}	
	(A)	(A)	(V)	(A)	(A)	(S)	(W)	(Ω)	(Ω)
LP-NSM005	0.05	0.15	60	10	1.0	1.20	0.6	2.000	50.000
LP-NSM012	0.125	0.29	30	20	1.0	0.20	0.6	1.500	6.000
LP-NSM016	0.16	0.37	30	20	1.0	0.30	0.6	1.200	4.500
LP-NSM020	0.20	0.40	16	40	8.0	0.05	0.6	0.600	2.500
LP-NSM035	0.35	0.75	6	40	8.0	0.10	0.6	0.300	1.200
LP-NSM050	0.50	1.00	6	40	8.0	0.10	0.6	0.150	0.700
LP-NSM075	0.75	1.50	6	40	8.0	0.20	0.6	0.100	0.290
LP-NSM110	1.10	1.80	6	40	8.0	0.30	0.6	0.055	0.210
LP-NSM150	1.50	3.00	6	40	8.0	1.00	0.6	0.040	0.120
LP-NSM200	2.00	4.00	6	40	8.0	2.00	1.0	0.020	0.070

Marking System

Part Marking System

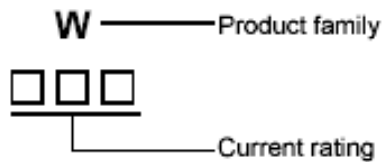

Part Numbering System

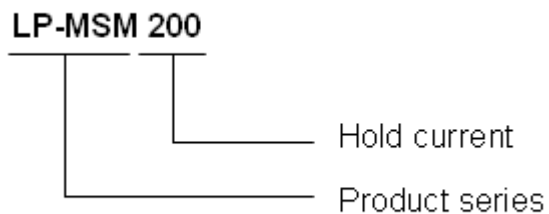

Test Procedures And Requirements



Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, V_{max} , 25°C	$T \leq$ maximum Time to Trip
Hold Current	30min, at I_H	No trip
Trip Cycle Life	V_{max} , I_{max} , 100cycles	No arcing or burning
Trip Endurance	V_{max} , 24hours	No arcing or burning

Packaging and Marking Information

Size 3216mm/1206 mils

Part number	Tape & Reel Quantity	Tape spc code	Part Marking	Recommended Pad Layout Figures[mm(In.)]						Agency Recognition
				Dimension A(Nom.)		Dimension B(Nom.)		Dimension C(Nom.)		
LP-NSM005	4000	1206A	/	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	Pending
LP-NSM012	4000	1206A	P	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM016	4000	1206A	T	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM020	4000	1206A	C	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM035	4000	1206A	W	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM050	4000	1206A	A	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM075	4000	1206A	Y	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM110	3500	1206B	O	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM150	3500	1206B	N	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	UL,CSA,TUV
LP-NSM200	3500	1206B	G	1.80	(0.071)	1.00	(0.041)	1.80	(0.071)	Pending

Solder Pad Layouts

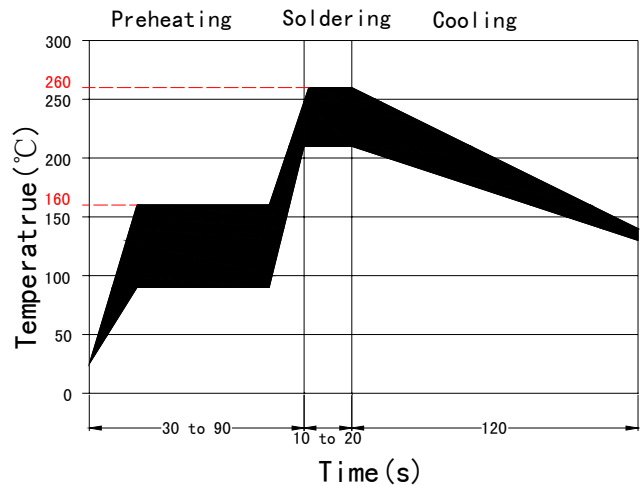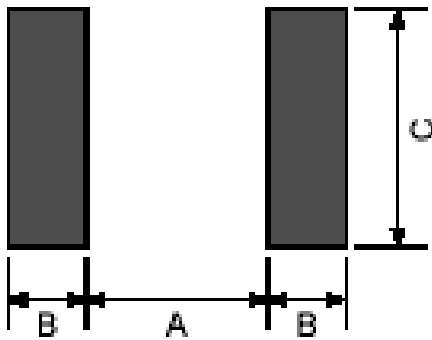

* Recommended reflow methods: IR, Vapor phase oven, hot air oven, wave solder.


* Devices can be cleaned using standard industry methods and solvents.

Notes:

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


Tape Specification And Reel Dimensions

Tape spc code	W	P0	P1	P2	A		D	F	E	T	K
1206(A)	8.00± 0.20	4.00± 0.10	4.00± 0.10	2.00± 0.05	1.77± 0.10	3.40± 0.10	1.55± 0.05	3.50± 0.10	1.75± 0.10	0.22± 0.05	1.04± 0.10
1206(B)	8.00± 0.20	4.00± 0.10	4.00± 0.10	2.00± 0.05	1.77± 0.10	3.40± 0.10	1.55± 0.05	3.50± 0.10	1.75± 0.10	0.22± 0.05	1.26± 0.10

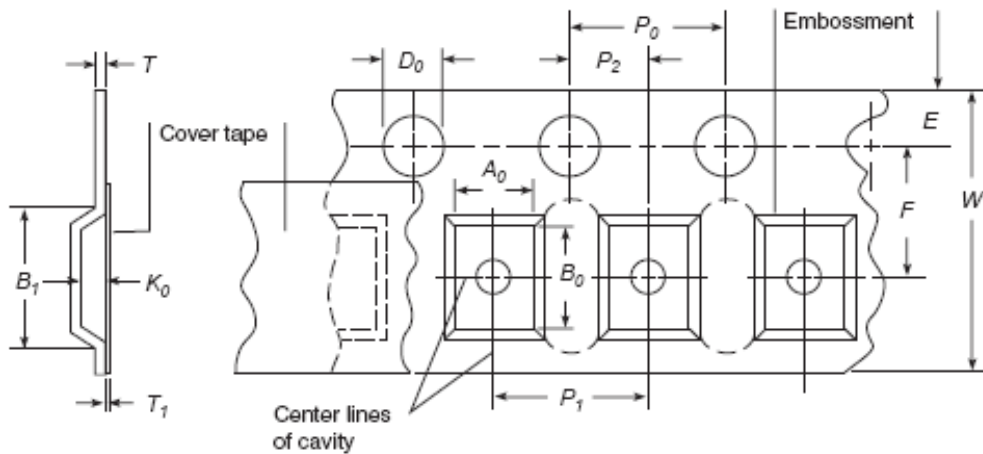

Reel Dimensions

Tape spc code	A	N	W1	W2
1206(A)	180+0/-1.5	60+1/-0	9.0+1/-0	13.0+1/-0
1206(B)	180+0/-1.5	60+1/-0	9.0+1/-0	13.0+1/-0

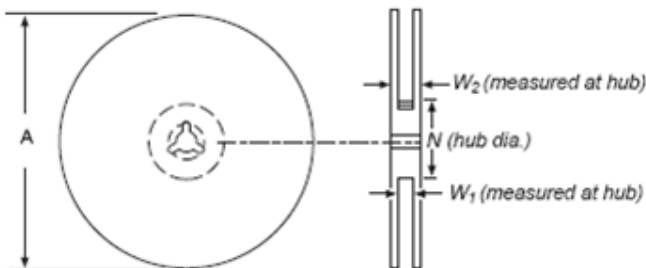

Storage

The maximum ambient temperature shall not exceed 40°C. Storage temperatures higher than 40°C could result in the deformation of packaging materials. The maximum relative humidity recommended for storage is 70%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components. Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use. The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.

Warning:

PPTC devices are intended for protection against occasional over-current or over-temperature fault conditions, and should not be used when repeated fault conditions are anticipated. Operation beyond maximum ratings or improper use may result in device damage and possible electrical arcing and flame.

Notes:

The specification is intended to present application, product and technical data to assist the user in selecting PPTC circuit production devices. However, users should independently evaluate and test the suitability of each product. Wayon makes no warranties as to the accuracy or completeness of the information and disclaims any liability resulting from its use. Wayon's only obligations are those in the Wayon Standard Terms and Conditions of Sale and in no case will Wayon be liable for any incidental, indirect, or consequential damages arising from the sale, resale, or misuse of its products. Wayon reserves the right to change or update, without notice, any information contained in this specification.