


SPECIFICATION FOR APPROVAL

REF :

PAGE: 1

PROD. NAME	HIGH CURRENT MULTILAYER CHIP BEAD	ABC'S DWG NO.	MB□□□□□□□□L□-□□□
		ABC'S ITEM NO.	

. CONFIGURATION & DIMENSIONS :

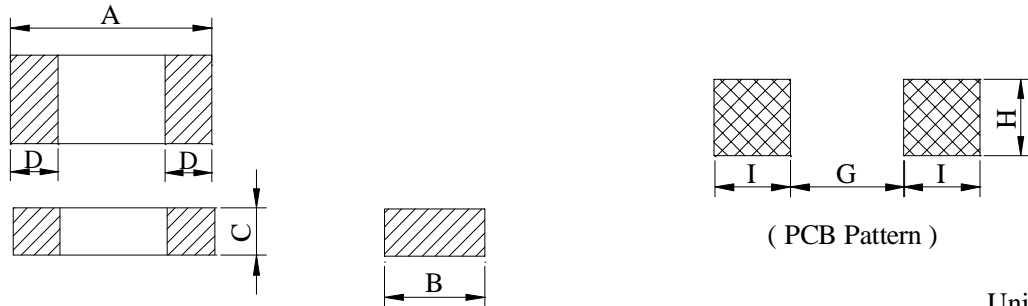

Unit : m/m


Series	A	B	C	D	G	H	I
MB4532	4.5±0.2	3.2±0.2	1.5±0.2	0.6±0.4	3.0	3.0	1.5
MB4516	4.5±0.2	1.6±0.2	1.6±0.2	0.6±0.4	3.0	1.4	1.5
MB3261	3.2±0.2	1.6±0.2	1.1±0.2	0.6±0.4	2.2	1.4	1.1
MB2029	2.0±0.2	1.2±0.2	0.9±0.2	0.5±0.3	1.0	1.0	1.0
MB1608	1.6±0.2	0.8±0.2	0.8±0.2	0.3±0.2	0.7	0.7	0.7

. SCHEMATIC DIAGRAM :




. MATERIALS :

- a . Body : Ferrite
- b . Internal conductor : Silver or Ag / Pd
- c . Terminal : Ag/Ni/Sn
- d . Remark : Products comply with RoHS' requirements



. GENERAL SPECIFICATION :


- a . Storage temp. : -40 ---- +105
- b . Operating temp. : -55 ---- +125
- c . Terminal strength :



Type	F (kgf)	Time (sec)
MB4532	1.5	
MB4516	1.0	
MB3261	1.0	30±5
MB2029	0.6	
MB1608	0.5	

- d . Solderability : Preheat : 150±25°C for 60 seconds
 Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent
 Solder temp. : 260±5
 Flux : Rosin
 Dip time : 4±1 seconds

Peak Temp : 260 max.
 Max time above 230 : 50sec max.
 Max time above 200 : 70sec max.

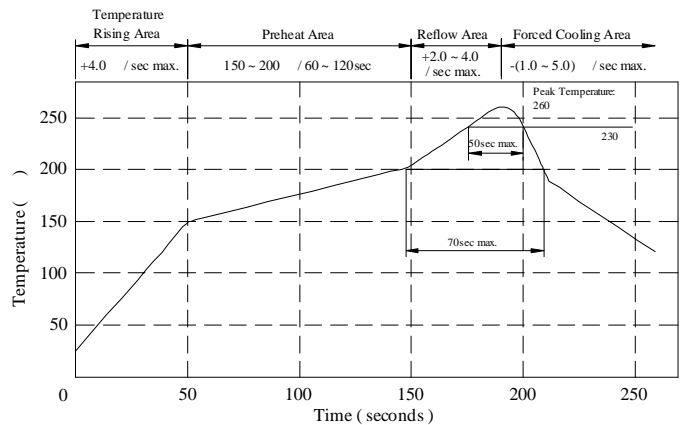

AR-001A

SPECIFICATION FOR APPROVAL

REF :







PAGE: 2-1

PROD. NAME	HIGH CURRENT MULTILAYER CHIP BEAD	ABC'S DWG NO.	MB□□□□□□□□L□-□□□
		ABC'S ITEM NO.	

ELECTRICAL CHARACTERISTICS :

DWG No.	Impedance (Ω) at 100MHz	RDC (m Ω) max.	IDC (A) max.
MB4532700YL□-□□□	70 \pm 25%	30	6.0
MB4532121YL□-□□□	120 \pm 25%	50	3.0
MB4532131YL□-□□□	125 \pm 25%	50	3.0
MB4516600YL□-□□□	60 \pm 25%	10	6.0
MB4516750YL□-□□□	75 \pm 25%	25	3.0
MB4516800YL□-□□□	85 \pm 25%	50	3.0

- 1). □ : Paclaging Information... **[A]**: Bulk **[B]**: Taping Reel
 2)."- □□□":Reference code

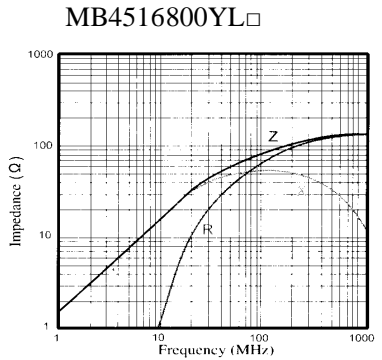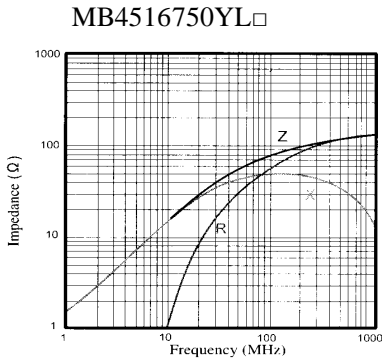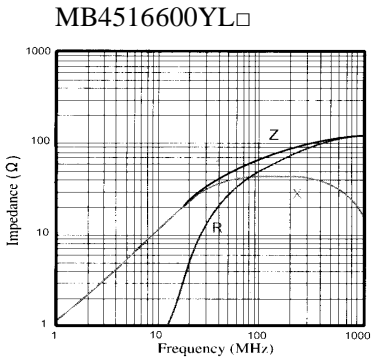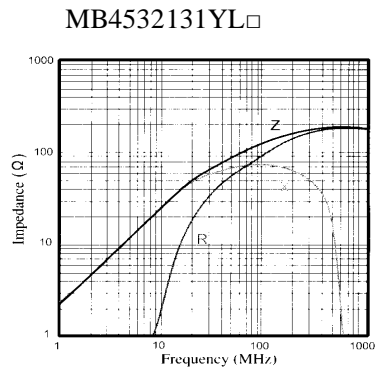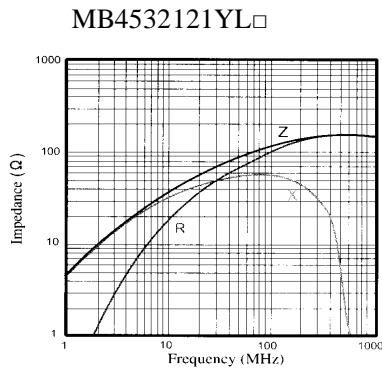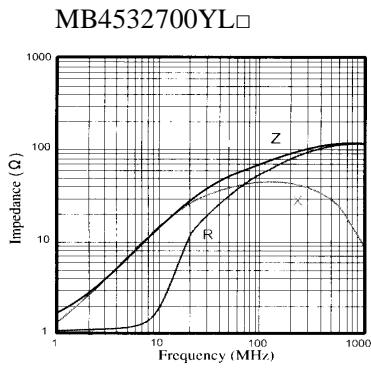

AR-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 2-2










PROD. NAME	HIGH CURRENT MULTILAYER CHIP BEAD	ABC'S DWG NO.	MB□□□□□□□□L□-□□□
		ABC'S ITEM NO.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	Impedance (Ω) at 100MHz	RDC (mΩ) max.	IDC (A) max.
MB3261190YL□ -□□□	19±25%	40	3.0
MB3261260YL□ -□□□	26±25%	40	3.0
MB3261310YL□ -□□□	31±25%	40	3.0
MB3261500YL□ -□□□	50±25%	25	3.0
MB3261800YL□ -□□□	80±25%	30	3.0
MB2029070YL□ -□□□	7±25%	30	3.0
MB2029100YL□ -□□□	10±25%	30	3.0
MB2029300YL□ -□□□	30±25%	25	3.0
MB1608300YL□ -□□□	30±25%	60	1.0

1). □ : Paclaging Information... [A]: Bulk [B]: Taping Reel

2). "- □□□":Reference code

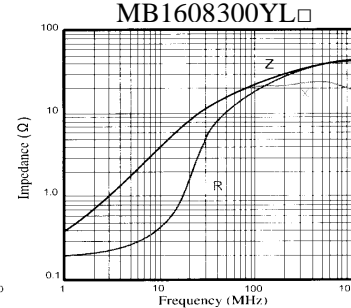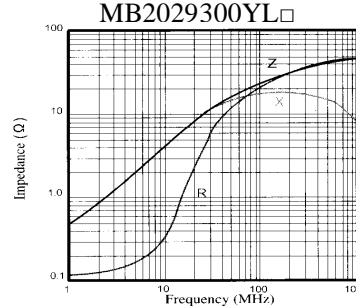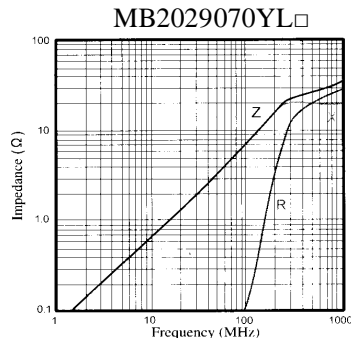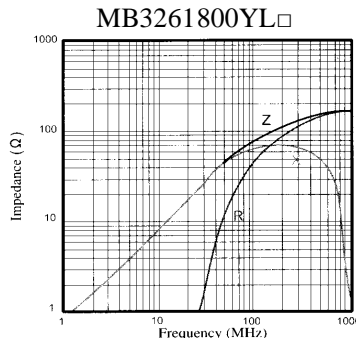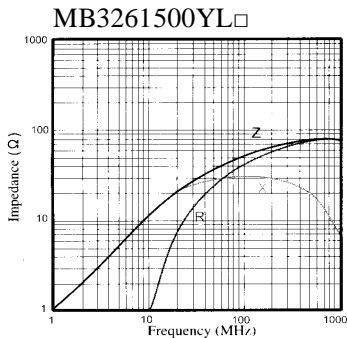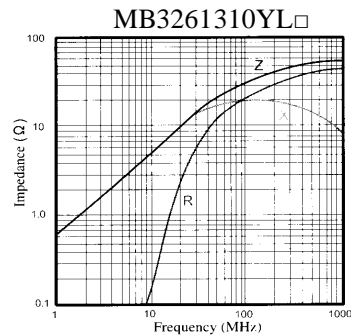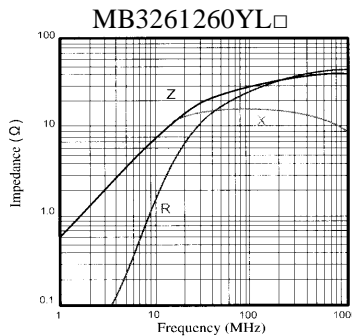

AR-001A



SPECIFICATION FOR APPROVAL



REF :

PAGE: 3

PROD. NAME	HIGH CURRENT MULTILAYER CHIP BEAD	ABC'S DWG NO.	MB□□□□□□□□L□-□□□
		ABC'S ITEM NO.	

PACKAGING INFORMATION :

(1) Configuration

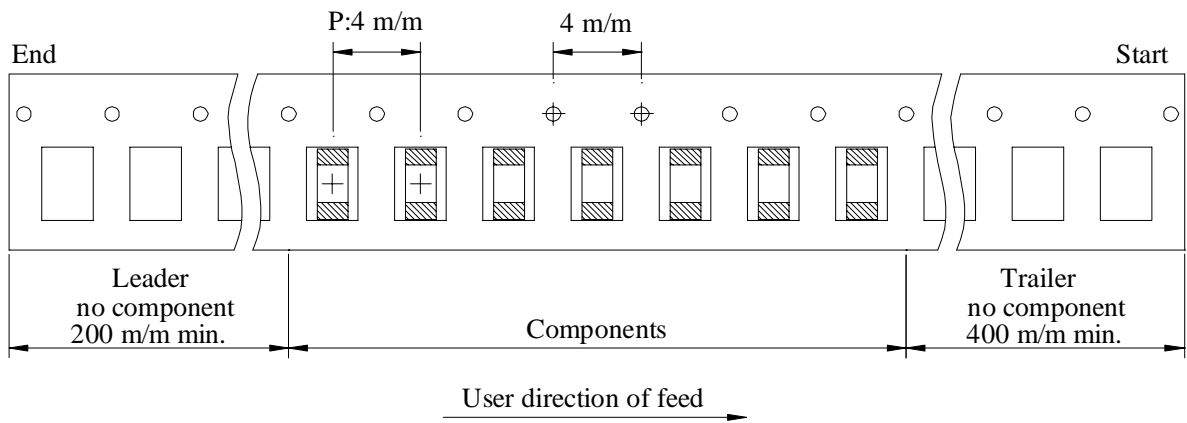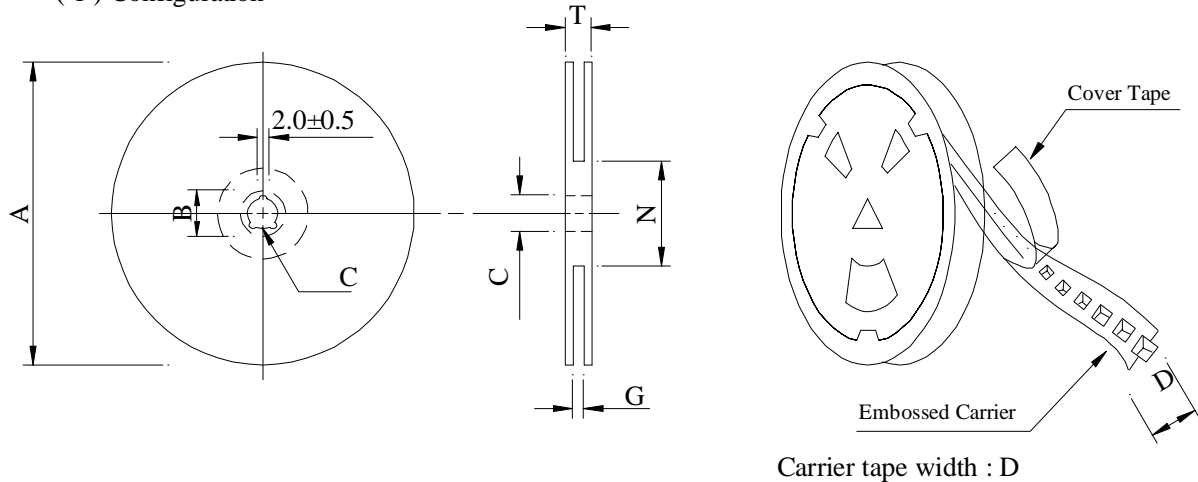

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 08	178	21±0.8	13	8	10 ⁺⁰	50 ⁻⁰	12.5
07 - 12	178	21±0.8	13	12	14 ⁺⁰	50 ⁻⁰	16.5

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Cartion		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY(kpcs)	G.W. (Kg)	Size (cm)
MB4532	1,000	170	07 - 12	30	9.3	41 x 39 x 22
MB4516	2,000	180	07 - 12	80	9.7	41 x 39 x 22
MB3261	3,000	150	07 - 08	120	8.5	41 x 39 x 22
MB2029	4,000	120	07 - 08	200	8.5	41 x 39 x 22
MB1608	4,000	90	07 - 08	200	7.0	41 x 39 x 22

AR-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 4

PROD. NAME	HIGH CURRENT MULTILAYER CHIP BEAD	ABC'S DWG NO.	MB□□□□□□□□L□-□□□
		ABC'S ITEM NO.	

(4) TYPE DIMENSIONS

Fig 1.


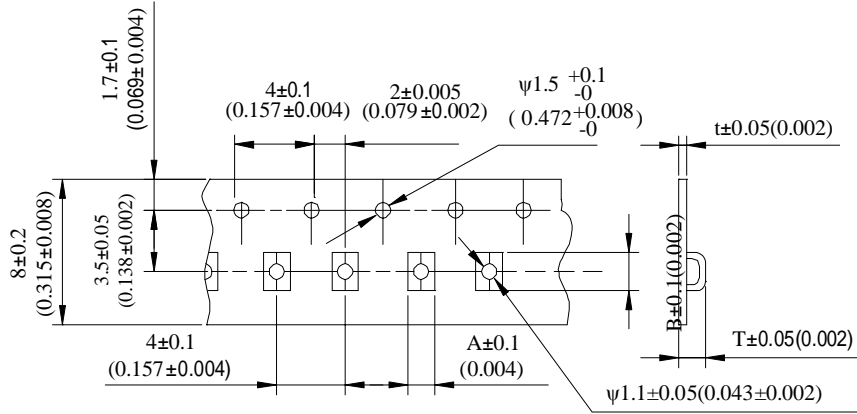


Fig 2.

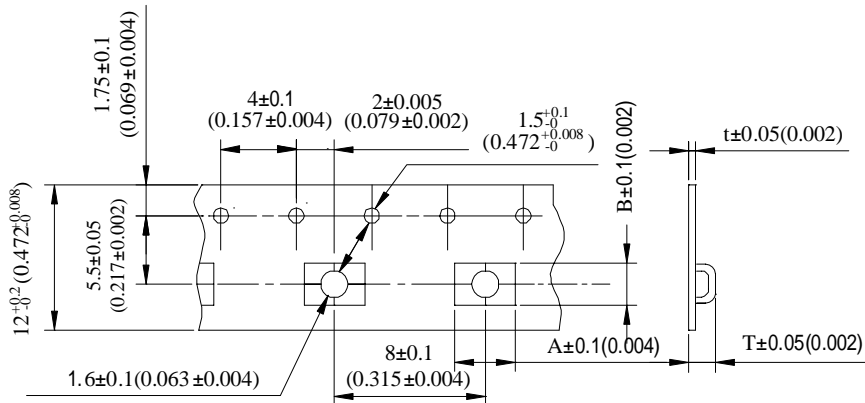

Unit:m/m

Type	A	B	T	t	Fig
MB4532	3.60	4.9	2.05	0.30	2
MB4516	2.90	4.9	1.40	0.30	2
MB3261	1.90	3.5	1.40	0.20	1
MB2029	1.55	2.3	1.20	0.20	1
MB1608	1.10	1.9	1.10	0.20	1


SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	HIGH CURRENT MULTILAYER CHIP BEAD	ABC'S DWG NO.	MB□□□□□□□□L□-□□□
		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

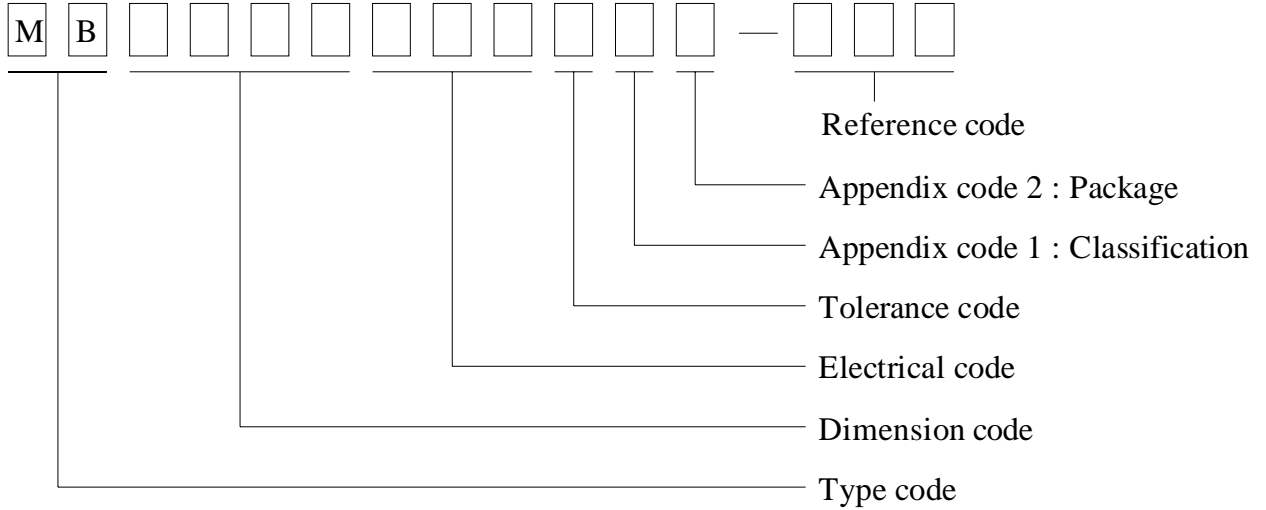

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	1000 pcs	MB4532
	T / R (Reel package)	2000 pcs	MB4516
	T / R (Reel package)	3000 pcs	MB3261
	T / R (Reel package)	4000 pcs	MB2029
	T / R (Reel package)	4000 pcs	MB1608